
MDT 2014 DD#620-20:

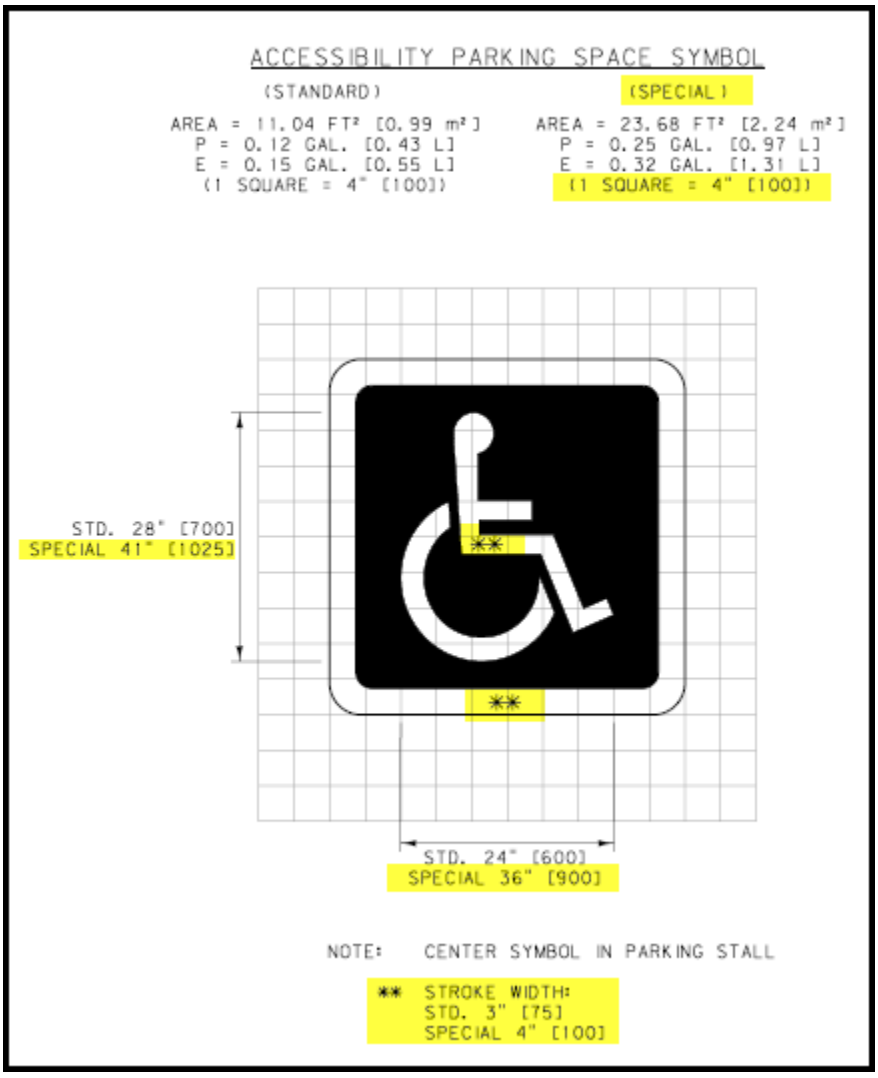

NOTES:

① ALL PAVEMENT MARKINGS ARE TO CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND "STANDARD HIGHWAY SIGNS" PUBLICATIONS, FROM THE FEDERAL HIGHWAY ADMINISTRATION.

② ALL SYMBOLS ARE TO BE WHITE EXCEPT FOR THE ACCESSIBILITIY PARKING SPACE SYMBOL WHICH HAS A BLUE BACKGROUND AND WHITE BORDER OPTIONS.

③ DO NOT EXCEED MORE THAN ONE LANE IN WIDTH FOR ANY PAVEMENT MARKINGS EXCEPT IN THE CASE OF THE WORD "SCHOOL". SEE DTL. DWG. NO. 620-10 FOR MORE INFORMATION.

④ WHEN WORDS AND SYMBOLS ARE USED IN COMBINATION, SPACE THEM AT LEAST FOUR TIMES THE HEIGHT OF CHARACTERS FOR LOW-SPEED ROADS, BUT NOT MORE THAN TEN TIMES THE HEIGHT OF THE CHARACTERS UNDER ANY CONDITION.

⑤ QUANTITIES ARE BASED ON THE SIZES OF PAVEMENT MARKINGS SHOWN AND ARE FOR ESTIMATING PURPOSES ONLY.

⑥ (P) - PAINT VOLUMES ASSUME A 17 MIL [0.432] THICKNESS.
(E) - EPOXY VOLUMES ASSUME A 22 MIL [0.559] THICKNESS.