

DETOUR *

STATION		lump sum	REMARKS
FROM	TO	CONST., MAINTAIN & REMOVE DETOUR	
1022+70.02	1033+11.93	1	
TOTAL		1	

* SEE DETAIL


AWARD COPY

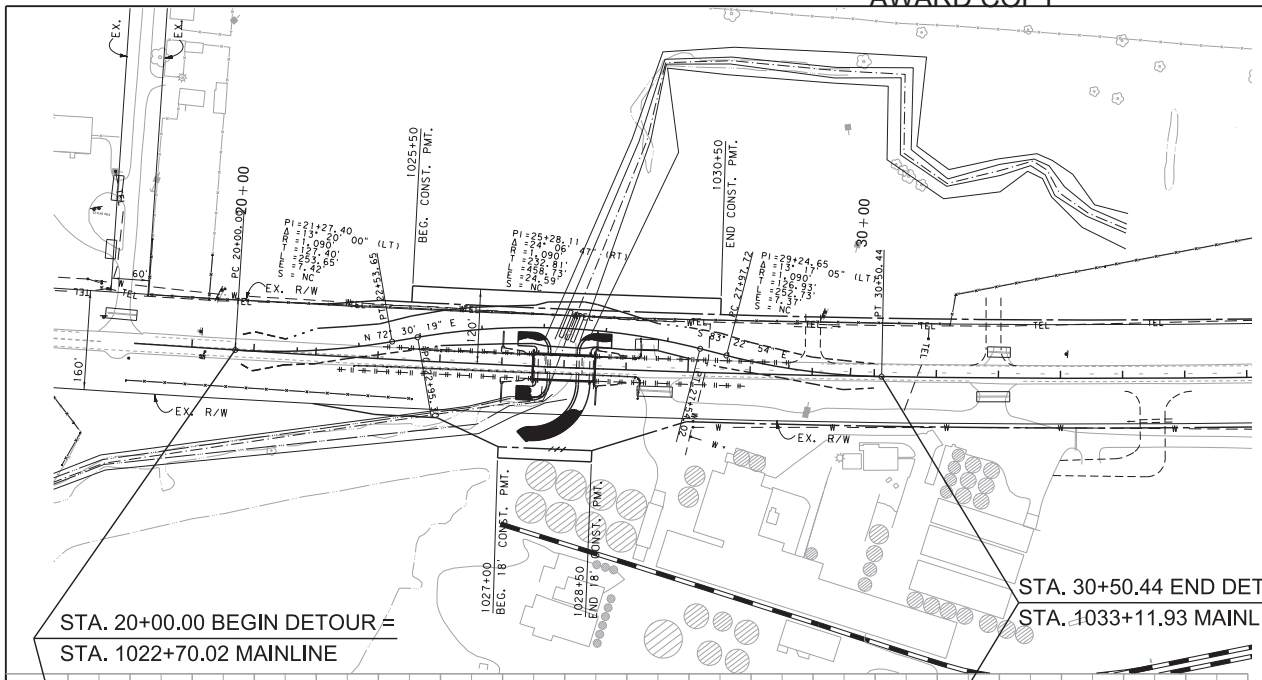

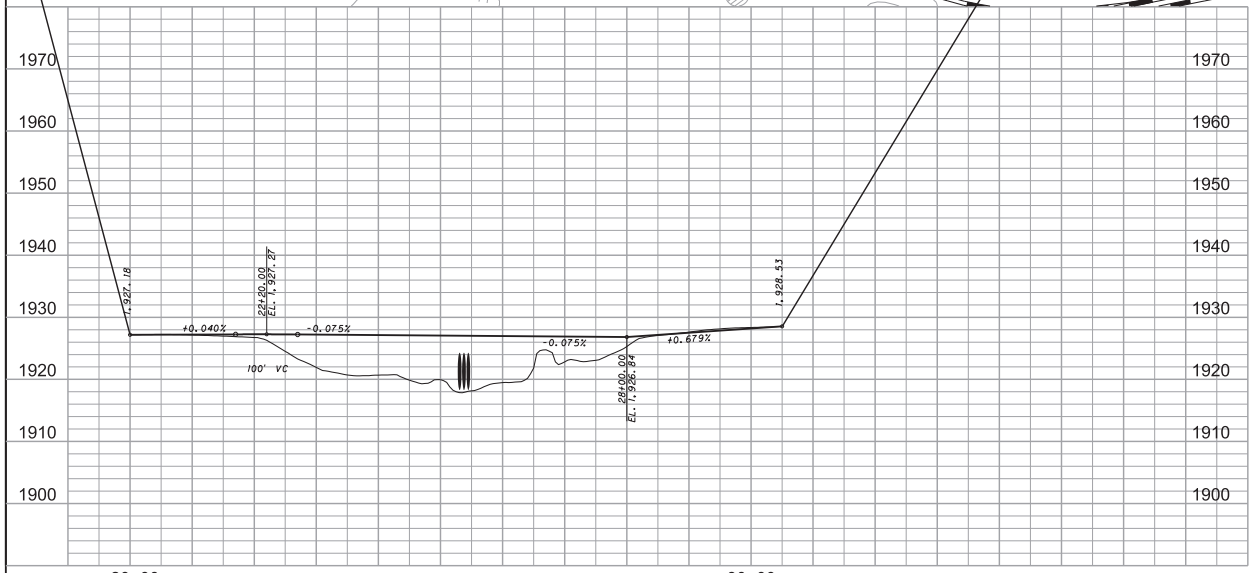

DETOUR TYPICAL SECTION

DETOUR DESIGN SPEED = 45 mph

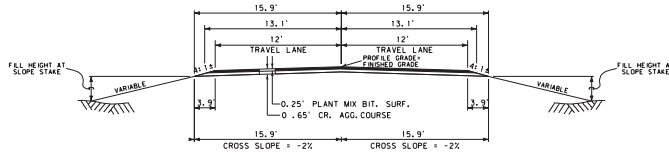

QUANTITIES		
UNIT	AGGREGATE	
	PLANT MIX COMMERCIAL	CR. AGG. COURSE
AREA square feet	6.28	18.85
cubic yards PER STATION	23.3	69.8
tons PER STATION	44.9	
square feet PER STATION		

* DETOUR QUANTITIES	V = 45 mph
EXCAVATION	192 CU. YD.
EMBANKMENT IN PL.	4,816 CU. YD.
TOPSOIL REPLACEMENT - EMB. IN PL.	260 CU. YD.
COMMERCIAL PLANT MIX PG 58-28	472 tons
CR. AGG.COURSE.	733 CU. YD.
3-72" CSP DRAIN	3 @ 46'
**STRAW	100 LF.

* FOR INFORMATION ONLY INCLUDED IN L. S. BID
** PLACE STRAW IN ACTIVE CHANNEL ONLY TO DENOTE LIMITS OF REMOVAL

DETOUR COORDINATE TABLE

STATION	DESCRIPTION	N OR Y COORDINATE	E OR X COORDINATE	REMARKS
20+00.00	PC	1,460,395.0225	3,188,581.0310	BEGIN DETOUR
21+27.40	PI	1,460,404.2675	3,188,708.0979	
22+53.65	PT	1,460,442.5669	3,188,829.6076	
22+95.30	PC	1,460,455.0855	3,188,869.3246	
25+28.11	PI	1,460,525.0721	3,189,091.3569	
27+54.02	PT	1,460,498.2396	3,189,322.6243	
27+97.72	PC	1,460,493.2040	3,189,366.0243	
29+24.65	PI	1,460,478.5744	3,189,492.1121	
30+50.44	PT	1,460,493.3098	3,189,618.1876	END DETOUR

DETOUR DETAIL

CLOVER CREEK

NO SCALE

3	MDT MONTANA DEPARTMENT OF TRANSPORTATION	C:\DGN\6388002rddet001.dgn	DESIGNED BY	L ZEIGLER	3/28/2014	ROAD PLANS	CULBERTSON-EAST	NH-MT-CBI 1-10(70)646
1		12/5/2018	REVIEWED BY				CSF= 0.99950030 644.5 TO 650.0 CSF= 0.99949491 650.0 TO 656.5 UPN 6388002	
		2:01:53 PM CPS - U0208	CHECKED BY			ROOSEVELT COUNTY		26