
ADVERTISED COPY

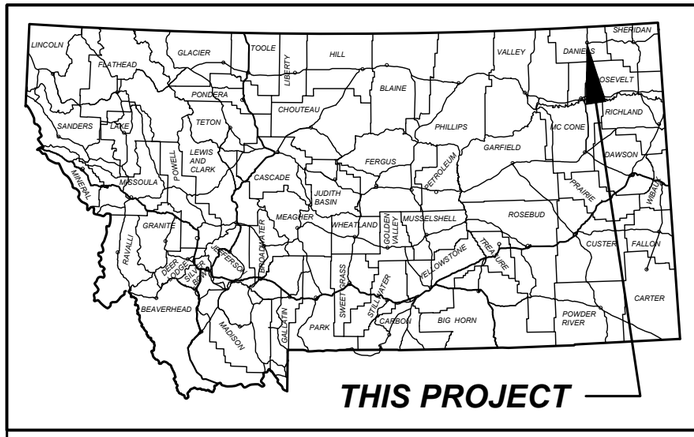


MONTANA DEPARTMENT OF TRANSPORTATION

FEDERAL AID PROJECT STPS 248-2(7)37
SEAL & COVER
SCOBEY - WEST
DANIELS COUNTY

LENGTH 8.6 MILES

SURFACING SOURCES - CONTRACTOR FURNISHED

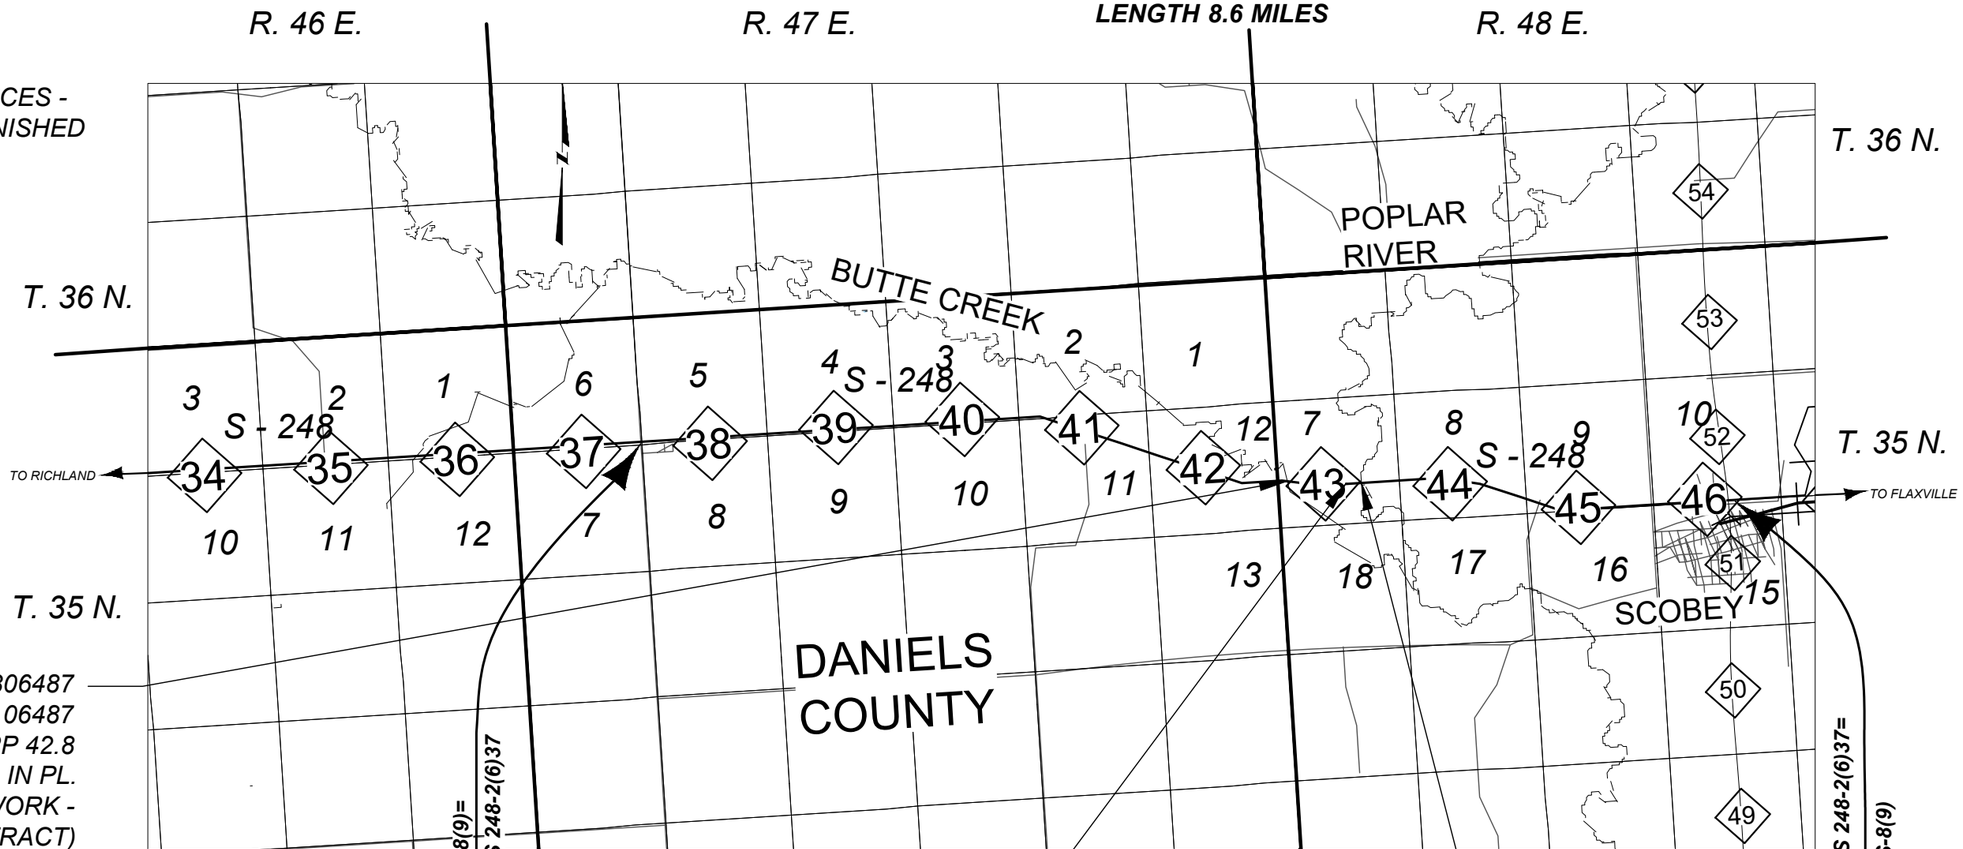

NBI 000000202306487
MDT STRUCTURE ID: 06487
RP 42.8
148.7' X 32.0' BR. IN PL.
(NO BRIDGE WORK - THIS CONTRACT)

NBI 000000202406488
MDT STRUCTURE ID: 06488
RP 43.1
87.0' X 32.0' BR. IN PL.
(NO BRIDGE WORK - THIS CONTRACT)

NBI S00248043+03531
MDT STRUCTURE ID: 06489
RP 43.3
277'.8' X 23'.7' BR. IN PL.
(NO BRIDGE WORK - THIS CONTRACT)

STA. 53+28.00 ON FAS S-8(9)=
STA. 53+28.00 BEG. STPS 248-2(6)37

STA. 506+44.40 END STPS 248-2(6)37=
STA. 506+44.40 ON FAS S-8(9)

RP 37.5 TO RP 46.1
THIS CONTRACT

SHEET NO. 1

TITLE

PROJECT NAME	SCOBEY - WEST
COUNTY	DANIELS
PROJECT ID	STPS 248-2(7)37
UPN	10675000

DESIGNED BY	T. WAHL	12/2025
REVIEWED BY	S. JARVIS	03/2026
CHECKED BY	T. JOHNSON	03/2026

10675000RDTTL001.DWG

MONTANA Department of Transportation

ROAD PLANS

6/18/2026 11:41 AM

ADVERTISED COPY

TABLE OF CONTENTS

ROAD PLANS	SHEET NO.
TITLE SHEET	1
TABLE OF CONTENTS	2
NOTES	2
TYPICAL SECTIONS	3-4
SUMMARY	5
SURFACING	5
PAVEMENT MARKINGS	5

NOTES

BASIS OF PLAN QUANTITIES

(QUANTITIES FOR ESTIMATING PURPOSES ONLY)

BITUMINOUS MATERIAL	= 8.5 LBS. PER GAL.
EMULSIFIED ASPHALT SEAL	= 0.42 GAL. PER SQ.YARD
COVER	= 25 LBS. PER SQ.YARD

UTILITIES

CALL THE UTILITIES UNDERGROUND LOCATION CENTER (811) OR OTHER NOTIFICATION SYSTEM FOR THE MARKING AND LOCATION OF ALL LINES AND SERVICES BEFORE EXCAVATING. ALL CLEARANCES OR DEPTHS PROVIDED FOR UTILITIES ARE FROM EXISTING GROUND LINE.

WETLANDS

WETLANDS MAY EXIST ADJACENT TO THE ROADWAY AND BEYOND THE PROJECT LIMITS. A WETLAND DELINEATION HAS NOT BEEN COMPLETED FOR THIS PROJECT. IMPACTS TO WETLAND AREAS ARE NOT ANTICIPATED IN ASSOCIATION WITH THE PROPOSED WORK. NO PERMITS HAVE BEEN OBTAINED. ANY ACTION IMPACTING WETLAND AREAS WITHOUT THE APPROPRIATE PERMITTING IS THE RESPONSIBILITY OF THE CONTRACTOR.

SHEET NO.
2

TABLE OF CONTENTS & NOTES

MONTANA
Department of Transportation

ROAD PLANS

DESIGNED BY		PROJECT NAME	SCOBEY - WEST
T. WAHL	12/2025	COUNTY	DANIELS
REVIEWED BY			
S. JARVIS	03/2026	PROJECT ID	STPS 248-2(7)37
CHECKED BY			
T. JOHNSON	03/2026	UPN	10675000


6/18/2026 11:41 AM
10675000RDTTL001.DWG

ADVERTISED COPY

TYPICAL SECTION NO. 1

MAINLINE

53+28.00	TO	322+95.00	THEN TO TYP. NO. 2
334+00.00	TO	345+00.00	THEN TO TYP. NO. 4
353+00.00			
358+75.00	BE TO	361+52.70	BE POPLAR RIVER BRIDGE
		506+44.40	

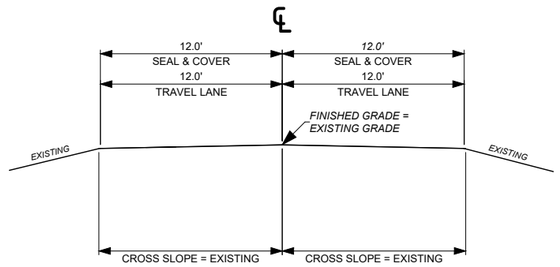


QUANTITIES			
UNIT	AGG. COVER	UNIT	BIT. MAT. EMULSIFIED ASPHALT SEAL
AREA square feet		square yards PER STATION	267
cubic yards PER STATION		tons PER STATION	0.48
tons PER STATION		gals PER STATION	
square yards PER STATION	267		

TYPICAL SECTION NO. 2

MAINLINE

322+95.00	TO	325+00.00	
325+00.00	TO	325+50.00	TRANS. TYP. NO. 2 TO TYP. NO. 3
332+00.00	TO	334+00.00	THEN TO TYP. NO. 1

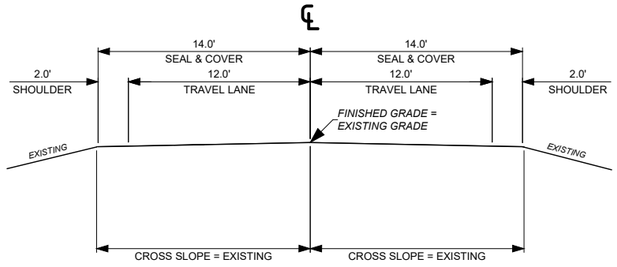

QUANTITIES			
UNIT	AGG. COVER	UNIT	BIT. MAT. EMULSIFIED ASPHALT SEAL
AREA square feet		square yards PER STATION	311
cubic yards PER STATION		tons PER STATION	0.56
tons PER STATION		gals PER STATION	
square yards PER STATION	311		

SHEET NO. 3

TYPICAL SECTIONS

PROJECT NAME: SCOBEY - WEST
COUNTY: DANIELS
PROJECT ID: STPS 248-2(7)37
UPN: 10675000

DESIGNED BY	REVIEWED BY	CHECKED BY
T. WAHL 12/2025	S. JARVIS 03/2026	T. JOHNSON 03/2026

MONTANA Department of Transportation

ROAD PLANS

10675000RDTYP001.DWG


6/18/2026 11:41 AM

ADVERTISED COPY

TYPICAL SECTION NO. 3

MAINLINE

325+50.00	TO	327+87.60	B.E.
329+37.40 B.E.	TO	331+50.00	
331+50.00	TO	332+00.00	TRANS. TYP. NO. 3 TO TYP. NO. 2
346+00.00	TO	348+43.83	B.E.
349+31.97 B.E.	TO	352+00.00	
352+00.00	TO	353+00.00	TRANS. TYP. NO. 3 TO TYP. NO. 4

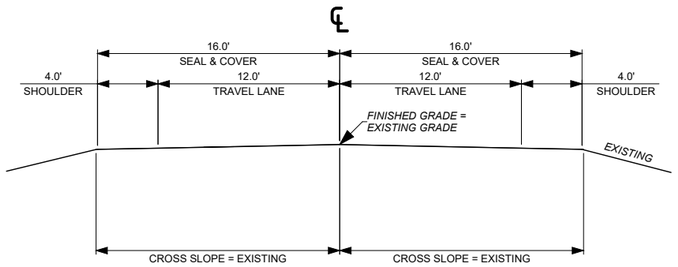


QUANTITIES			
UNIT	AGG. COVER	UNIT	BIT. MAT. EMULSIFIED ASPHALT SEAL
AREA square feet		square yards PER STATION	356
cubic yards PER STATION		tons PER STATION	0.64
tons PER STATION		gals PER STATION	
square yards PER STATION	356		

TYPICAL SECTION NO. 4

MAINLINE

345+00.00	TO	346+00.00	THEN TO TYP. NO. 3
353+00.00			ONLY, THEN TYP. NO. 1

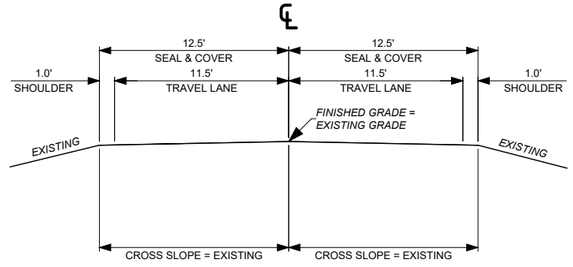

QUANTITIES			
UNIT	AGG. COVER	UNIT	BIT. MAT. EMULSIFIED ASPHALT SEAL
AREA square feet		square yards PER STATION	278
cubic yards PER STATION		tons PER STATION	0.50
tons PER STATION		gals PER STATION	
square yards PER STATION	278		

SHEET NO.
4

TYPICAL SECTIONS

PROJECT NAME: SCOBEY - WEST
COUNTY: DANIELS
PROJECT ID: STPS 248-2(7)37
UPN: 10675000

DESIGNED BY	REVIEWED BY	CHECKED BY
T. WAHL 12/2025	S. JARVIS 03/2026	T. JOHNSON 03/2026

MONTANA
Department of Transportation

ROAD PLANS

10675000RDTYP001.DWG

6/18/2026 11:41 AM

ADVERTISED COPY

SURFACING

STATION FROM	STATION TO	linear feet GROSS	linear feet NET	linear feet +	linear feet -	FOR	AGGREGATE sq. yards COVER TYPE I	BIT. MAT. tons EMULSIFIED ASPHALT CHFRS-2P	REMARKS
53+28.00	322+95.00	26,967.00	26,967.00				72,002	129.4	TYP. NO. 1
322+95.00	325+00.00	205.00	205.00				638	1.1	TYP. NO. 2
325+00.00	325+50.00	50.00	50.00				167	0.3	TRANS. TYP. NO. 2 TO TYP. NO. 3
325+50.00									
327+88.18 B.E.	329+36.82 B.E.				148.64	BRIDGE			
	331+50.00	600.00	451.36				1,607	2.9	TYP. NO. 3
331+50.00	332+00.00	50.00	50.00				167	0.3	TRANS. TYP. NO. 3 TO TYP. NO. 2
332+00.00	334+00.00	200.00	200.00				622	1.1	TYP. NO. 2
334+00.00	345+00.00	1,100.00	1,100.00				2,937	5.3	TYP. NO. 1
345+00.00	346+00.00	100.00	100.00				278	0.5	TYP. NO. 4
346+00.00									
348+44.41 B.E.	349+31.39 B.E.				86.98	BRIDGE			
	352+00.00	600.00	513.02				1,826	3.3	TYP. NO. 3
352+00.00	353+00.00	100.00	100.00				312	0.6	TRANS. TYP. NO. 3 TO TYP. NO. 1
353+00.00									
358+75.00 BE	361+52.70 BE				277.70	POPLAR RIVER BRIDGE			
	506+44.40	15,344.40	15,066.70				40,228	72.3	TYP. NO. 1
TOTAL		**45,316.40**	**44,803.08**	**~**	**513.32**		**120,784**	**217.1**	

PAVEMENT MARKINGS

ITEM	UNIT	INTERIM APPLICATION #	FINAL APPLICATION	TOTAL
STRIPING - WHITE PAINT	gallon	304		304
STRIPING - YELLOW PAINT	gallon	110		110
WORDS & SYMBOLS - WHITE PAINT	gallon	1		1
STRIPING - WHITE EPOXY	gallon		406	406
STRIPING - YELLOW EPOXY	gallon		146	146
WORDS & SYMBOLS - WHITE EPOXY	gallon		1	1
FINAL SWEEP AND BROOM	course mile			8.5

BASED ON 1 APPLICATIONS.

SHEET NO.
5

SUMMARY

PROJECT NAME: SCOBEY - WEST
COUNTY: DANIELS
PROJECT ID: STPS 248-2(7)37
UPN: 10675000

DESIGNED BY: T. WAHL 12/2025
REVIEWED BY:
CHECKED BY:

MONTANA Department of Transportation
ROAD PLANS

6/18/2026 11:41 AM
10675000RDSUM001.DWG