C:\DGN\8725000SISDC002.DGN

SHEET 1


12:29:06 PM
12/22/2016
u7571

MONTANA
DEPARTMENT OF TRANSPORTATION

# SIGN DESIGN CALCULATIONS

PROJ. NO. _____

PROJ. TITLE _____

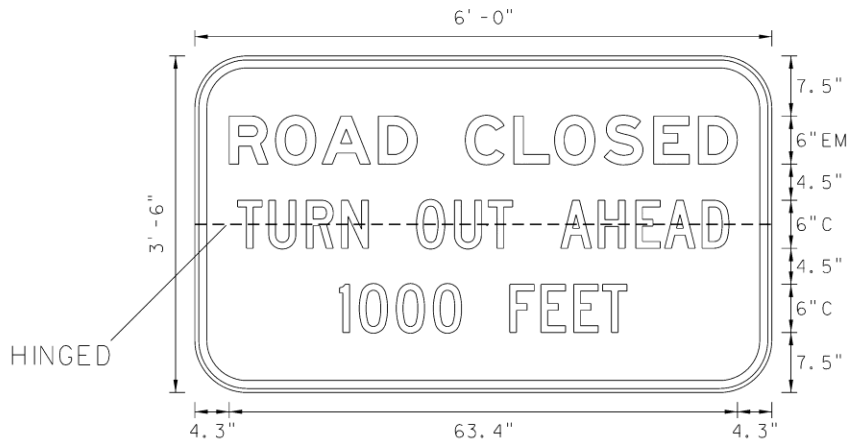


"ROAD CLOSED" ONLY

REDUCTION 10% [X] 20% [ ] 30% [ ]

Panel Style: 1 Yel-PS_3-0 4-6.ssi
Dimensions are in inches. tenths

SIGN NAME: ROAD CLOSED

SHT ALUM [ ]
ALUM INCR [X]

SIGN DETAIL 1:8

| | | | |
|---|---|---|---|
| DESIGNED: | SDR | DATE: | 12-16 |
| CHECKED: | NJT | DATE: | 12-16 |

| | |
|---|---|
| SIGN NUMBER | W99-1 |
| WIDTH x HGHT. | 6'-0" x 3'-6" |
| MARGIN | 0.5" |
| BORDER WIDTH | 1" |
| CORNER RADIUS | 6" |
| SQ. FEET | 21.0 Sq.Ft. |
| MOUNTING | Ground |
| BACKGROUND TYPE: | High Intensity |
| BACKGROUND COLOR: | Yellow |
| LEGEND/BORDER TYPE: | Non Reflective |
| LEGEND/BORDER COLOR: | Black/Black |

Stations:

| SYMBOL | ROT | X | Y | WID | HT |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

LETTER POSITIONS (X)

| | | | | | | | | | | | | | | | | | | | | LENGTH | SERIES SIZE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | R | O | A | D | | C | L | O | S | E | D | | | | | | | | | 72.0 | EM 2000 6 |
| 4.3 | 5.8 | 5.8 | 7 | 4.9 | 6 | 6 | 5.1 | 6.2 | 6.2 | 5.6 | 4.9 | 4.3 | | | | | | | | | |
| | T | U | R | N | | O | U | T | | A | H | E | A | D | | | | | | 72.0 | C 2000 6 |
| 5.3 | 3.9 | 4.7 | 4.4 | 3.4 | 6 | 4.7 | 4.2 | 3.1 | 6 | 4.7 | 4.7 | 3.6 | 4.7 | 3.4 | 5.3 | | | | | | |
| | 1 | 0 | 0 | 0 | | F | E | E | T | | | | | | | | | | | 72.0 | C 2000 6 |
| 18.1 | 2.5 | 4.6 | 4.6 | 3.5 | 6 | 3.9 | 4.1 | 3.6 | 3.1 | 18.1 | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | |