CONTRACT NO. 04121

Backsfed.012121

STATE OF MONTANA
DEPARTMENT OF TRANSPORTATION
BID PACKAGE

Sealed bids for construction of this project will be received by the Montana Department of Transportation, Construction Contracting Bureau, Room 101, 2701 Prospect, Helena, Montana until 9:00 a.m. on January 21, 2021. All bids will then be publicly opened, reviewed for correctness, and then publicly read.

Federal Aid Project(s):

STPB 234-1(25)2 Bridge Deck S-234 South-Havre

Bid proposals, Plans, Standard Specifications, Detail Drawings, and Standard Contract Forms are on file for examination and may be obtained from the Construction Contracting Bureau of the Montana Department of Transportation, 2701 Prospect Avenue, P.O. Box 201001, Helena, Montana 59620-1001.

Prime bidders use the Electronic Bid System or bid on-line through Bid Express to produce a bid containing Proposal Forms, Schedule of Items, and Disadvantaged Business Enterprises (DBE) Requirements (if applicable).

CONTRACT #04121
AWARDED ON: FEBRUARY 2, 2021
TO: SLETTEN CONSTRUCTION COMPANY

MONTANA DEPARTMENT OF TRANSPORTATION

Barb Skelton, Chairperson
Montana Transportation Commission

Michael T. Tooley
Director of Transportation

Contract No.04121
SEH:ST:9437000AWD-103

AWARD COPY

CURRENT QUESTIONS & ANSWERS

103 - BRIDGE DECK S-234 S HAVRE - January 21, 2021

Notifications

No Notices available for this project.

Addendums

No Addendums available for this project.

Clarifications

-1-
Submitted: Tuesday 22-DEC-2020 8:10AM
The **MDT Nondiscrimination and Disability Accommodation Notice** has been updated in Section II.

-2-
Submitted: Thursday 14-JAN-2021 10:13AM
The attached Partnering Level II Special Provision is hereby made part of this contract. **LINK**

Questions

-1-
Submitted: Monday 11-JAN-2021 02:02 PM
Company: MWHC
Contact: Chris Connors
1) Special Provision 37 specifies the installation of a Impact Attenuator, different from a Temporary Impact Attenuator as covered in SP 38. However there is no bid item for this work.
2) Traffic control for this project is bid as lump sum except for the Traffic Actuated Temporary Signals. SP #42 covers requirements for a Smart Workzone feature and provides payment via units per day. What is the Department's intent? Is the contractor to include in the lump sum traffic control bid item the cost to have the system on site and ready to go when or if traffic meets the 10 car/50% of the time? Or, is the system to be available the entire project, only used when the 10 car/50% specification is met and paid at 500 units per day under the Traffic Control - Fixed bid item? Seems more reasonable to make the use of this system mandatory in conjunction with the temporary signal bid item for this project as opposed to used only when needed. As the system is fairly specific and entailed, the MDT will be paying for the system to be on site whether it is used or not if there is any chance of exceeding the waiting time specifications.
Answer
Submitted: Tuesday 12-JAN-2021 03:35 PM
1. Special Provision 37 is hereby rescinded from the contract.

2. Traffic Actuated Temporary Signals will be paid for as stated in SP 39. Include the cost of the Smart Work Zone System option or walk-back flaggers in the Traffic Control - LS bid item.

CURRENT QUESTIONS & ANSWERS

The intent of SP 42 is not to direct the contractor to use the system, but to provide an option for the contractor. SP 42 provides standards of the system should the contractor decide to use the system in leu of a walk-back flagger.

-2-
Submitted: Wednesday 13-JAN-2021 10:04 AM
Company: Sletten Construction Co.
Contact: Michael Anderson
1) There is a guard angle at each end of each approach slabs plus one at each end of the bridge for a total of six and total length of 231 feet. Is removal of the bridge-end guard angle incidental to the deck removal or will it be paid under this bid item?
2) The bridge deck milling occurs on the approach slabs. Class Overlay concrete quantities are based on a "3in depth to account for surface irregularities and the removal of unsound concrete below the nominal removal depth shown on the plans." Normal roto-milling will not remove unsound concrete below the nominal depth and there is no Class A Repair bid item. Is hydro-demolition mandatory on the bridge deck milling bid item?
Answer
Submitted: Thursday 14-JAN-2021 12:40 PM
1. Removal of the guard angles on the bridge ends is included in the Remove Deck bid item.

2. Due to the anticipated proximity of rebar to the surface of the approach slabs, additional mechanical means may be required to achieve the plan removal depth if conventional roto-milling is used. Hydro-demolition is not mandatory.

-3-
Submitted: Friday 15-JAN-2021 07:43 AM
Company: L & J Construction Group, LLC
Contact: Estimating
Will MDT consider a NTP Flex Date of 7/5/2021? All migratory bird provisions can be met before April 15th without traffic control.
Answer
Submitted: Wednesday 20-JAN-2021 07:51AM
After considering the NTP flex date of 7/5/2021 MDT has determined the NTP will remain March 22,2021 as outlined in the contract.

-4-
Submitted: Friday 15-JAN-2021 04:38 PM
Company: Sletten Construction Co.
Contact: Michael Anderson
Sletten has performed a ground penetrating radar (GPR) review of the rebar depth of cover on both approach slabs. Cover depths appears to be between 3/4" to +1"; does this correlate with MDT's inspection findings? In light of this information, please confirm that hydro-demolition is an acceptable method of bridge deck milling to plan depth of 2".
Answer
Submitted: Wednesday 20-JAN-2021 10:03AM
Please see the link below for MDT's deck survey information. MDT used the deck survey information in conjunction with as-built plans (included in the contract) to arrive at the 2" mill depth.

There is potentially rebar with cover less than indicated in the deck survey information.

CURRENT QUESTIONS & ANSWERS

Hydrodemolition is one acceptable method of completing the planned 2" depth of milling.
The deck survey link is here: **LINK**

1. PARTNERING- LEVEL II FACILITATION [105]

An internal partnering meeting will be facilitated between the Project Manager and the Contractor prior to the Notice to Proceed date.

Implement partnering in accordance with the Montana Partnering Field Guide found at the following link: https://www.mdt.mt.gov/publications/manuals.shtml#con

Make a good-faith effort to settle any unresolved discrepancies by utilizing the Partnering Escalation/Issue Resolution Ladder identified in the Partnering Field Guide prior to submitting a notice of claim.

MONTANA DEPARTMENT OF TRANSPORTATION
SCHEDULE OF ITEMS

CONTRACT ID: 04121

PROJECT: STPB 234-1(25)2 (9437025000)
BRIDGE DECK S-234 SOUTH HAVRE

PROP LINE NO.	ITEM NUMBER	ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY
	SECTION 0001 - SURFACING, GUARDRAIL, PAVEMENT MARKINGS			
0010	104 030 010	MISCELLANEOUS WORK	UNIT	15,000.00
0020	105 070 000	CONTRACTOR SURVEY AND LAYOUT	LS	1.00
0030	109 200 005	MOBILIZATION	LS	1.00
0040	202 020 058	REMOVE GUARD ANGLE	LNFT	154.00
0050	202 020 115	REMOVE DECK	SQYD	448.00
0060	208 010 000	BMP ADMINISTRATION-LS	LS	1.00
0070	208 010 200	TEMPORARY EROSION CONTROL-FIXED	UNIT	500.00
0080	401 020 022	COMMERCIAL MIX-PG 64-28	TON	160.00
0090	402 020 315	EMULSIFIED ASPHALT-TACK COAT	GAL	80.00
0100	402 020 375	EMULSIFIED ASPHALT CHFRS-2P	TON	2.70
0110	409 000 000	FINAL SWEEP AND BROOM	CRMI	0.10
0120	409 000 010	COVER-TYPE 1	SQYD	1,512.00
0130	411 010 000	COLD MILLING	SQYD	1,610.00
0140	551 020 036	CONCRETE-CLASS STRUCTURE LOW SLUMP	CUYD	103.80
0150	552 010 140	TRANSVERSE DECK GROOVING	SQYD	548.30
0160	552 010 805	MODIFY BRIDGE APPROACH SLAB	EACH	4.00
0170	555 010 200	REINFORCING STEEL-EPOXY COATED	LB	24,962.00
0180	557 010 051	42 IN OPEN RAIL-BR-CSC	LNFT	184.20
0190	557 010 056	42 IN OPEN RAIL PARAPET-BR-CSC	EACH	4.00
0200	561 010 525	EXPANSION JOINT-PRECOMPRESSED	LNFT	75.00
0210	561 020 110	BRIDGE DECK MILLING	SQYD	172.10
0220	563 000 000	CONCRETE-CLASS OVERLAY	CUYD	14.40
0230	606 010 047	GD RAIL-STL INT RDWY TERM SECT	LNFT	150.00
0240	606 010 230	GUARDRAIL-STL/BR APPR-TY 3	EACH	4.00
0250	606 010 385	REMOVE GUARDRAIL	LNFT	200.00
0260	606 011 503	RESET TEMP IMPACT ATTENUATOR	EACH	2.00
0270	606 011 518	TEMPORARY IMPACT ATTENUATOR	EACH	2.00
0280	618 030 015	TRAFFIC CONTROL-FIXED	UNIT	500.00
0290	618 030 080	TRAFFIC CONTROL-LS	LS	1.00
0300	618 100 007	TRAFFIC ACTUATED TEMPORARY SIGNALS	DAY	85.00
0310	618 190 100	TEMPORARY BARRIER RAIL	LNFT	260.00
0320	618 190 110	RESET TEMP BARRIER RAIL	LNFT	260.00
0330	619 010 090	SIGNS-ALUM REFL SHEET XI	SQFT	13.00
0340	619 010 230	REMOVE SIGN	EACH	2.00
0350	619 010 310	POSTS-STEEL U SIGN	LB	70.00
0360	619 010 480	POLES-TREATED WOOD 4 IN	LNFT	14.00
0370	619 011 010	DELINEATOR DES A	EACH	3.00
0380	619 011 040	DELINEATOR DES D	EACH	2.00
0390	620 012 955	TEMPORARY STRIPING	LNFT	541.00
0400	620 013 960	STRIPING-WHITE EPOXY	GAL	5.00
0410	620 014 960	STRIPING-YELLOW EPOXY	GAL	5.00

TABLE OF CONTENTS
FEDERAL AID PROJECT(S) STPB 234-1(25)2

1. PROJECT DESCRIPTION [102] 5
2. CONTRACT TIME [108] (REVISED 1-21-16) 5
3. CONTRACT DOCUMENTS [102] (ADDED 9-17-20) 6
4. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 1-18-18) 6
5. DBE QUOTES [102] (REVISED 3-10-16) 6
6. DBE USAGE [102] (REVISED 2-13-20 M) 6
7. LABOR REQUIREMENTS [102] (REVISED 9-5-19) 6
8. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 3-12-20) 7
9. ZONE PAY [102] (REVISED 5-10-18) 7
10. CONSULTANT ENGINEERING AND INSPECTION (CEI) ADMINISTERED PROJECTS 7
11. BIDDING REQUIREMENTS – PROPOSAL GUARANTEE [102] (REVISED 12-17-20) ... 7
12. DELIVERY AND PUBLIC OPENING OF PROPOSALS [102] (ADDED 9-17-20) 7
13. 103.07 EXECUTION AND APPROVAL OF CONTRACT [103] (ADDED 6-13-19) 8
14. BIDDER'S PROPOSED AGGREGATE SOURCE(S) [103] (REVISED 1-24-19) 8
15. SUBMISSION OF CERTIFIED CLAIMS [105] (ADDED 4-23-20) 8
16. UTILITY INVOLVEMENT AND COORDINATION 9
17. STEEL PRICE ADJUSTMENT [106] (REVISED 4-25-19) 10
18. CONSTRUCTION EQUIPMENT ON STRUCTURES (REVISED 7-16-20) 11
19. TELECOMMUNICATION OR VIDEO SURVEILLANCE EQUIPMENT, SERVICES, OR SYSTEMS [107] (ADDED 10-08-20) 12
20. STORM WATER PERMITTING REQUIREMENTS UNDER THE MONTANA POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [107] (REV 3-16-17) 12
21. MIGRATORY BIRD TREATY ACT COMPLIANCE - STRUCTURES [107] (REVISED 12-8-16) 14
22. AIS WATERCRAFT AND EQUIPMENT INSPECTION [107] (ADDED 4-25-19) 15
23. PUBLIC INVOLVEMENT [107] (REVISED 4-25-19) 15
24. NOTICE TO BIDDERS [108] (ADDED 11-21-08) 17
25. SALVAGE MATERIALS 17
26. LOCAL ROAD 802 17
27. LONGITUDINAL JOINT COMPACTION [401] (REVISED 10-10-19) 17
28. EMULSIFIED ASPHALT CHFRS-2P [402] (ADDED 10-10-19) 18
29. BASE PRICE FOR CONCRETE [551] (REVISED 12-17-20) 19
30. CONCRETE – CLASS STRUCTURE LOW SLUMP (ADDED 5-14-20) 19

31. BRIDGE DEMOLITION NOTIFICATION 19
32. MODIFIED BRIDGE DECK CONCRETE WATER CURE [551] (REVISED 3-2-2020) 20
33. BRIDGE DECK REINFORCING STEEL COVER (REVISED 12-28-09) 21
34. BARRIER END DETAIL 21
35. MODIFY BRIDGE APPROACH SLAB 22
36. EXPANSION JOINT – PRECOMPRESSED [707] (ADDED 10-08-20) 22
37. IMPACT ATTENUATOR [606] (REVISED 9-11-14) 24
38. IMPACT ATTENUATOR – TEMPORARY [606] (REVISED 1-21-21) 24
39. TRAFFIC ACTUATED TEMPORARY SIGNALS [618] (REVISED 12-7-17) 25
40. TEMPORARY BARRIER RAIL [618] (REVISED 12-7-17) 25
41. TRAFFIC CONTROL DEVICES – PLASTIC DRUMS [618] (REVISED 1-23-20) 26
42. SMART WORKZONE WALKBACK FLAGGER REPLACEMENT OPTION (END OF QUEUE DETECTION AND WARNING) [618] (ADDED 8-13-20) 26
43. SIGNING REQUIREMENTS 27

SECTION II
Nondiscrimination Notice

SECTION III
Standard Provisions & Requirements

SPECIAL PROVISIONS

FEDERAL AID PROJECT NO(S). STPB 234-1(25)2

(REVISED 12-17-20)

The following special provisions are hereby made part of the contract and supplement and/or supersede and sections of the Standard and Supplemental Specifications of Road and Bridge Construction, adopted by the Montana Department of Transportation and the Montana Transportation Commission and all supplements thereto in conflict therewith.

The following documents are hereby incorporated by reference into this contract:

- Standard and Supplemental Specifications for Road and Bridge construction 2020 V1.3 Edition" found at the following link: https://www.mdt.mt.gov/other/webdata/external/const/specifications/2020/SPEC-BOOK/2020-SPEC-BOOK-V1-3.pdf
- The most recent version of the Detailed Drawings can be found at the following link: https://www.mdt.mt.gov/business/contracting/detailed_drawings.shtml
- The most recent version of the Materials Manual can be found at the following link: https://www.mdt.mt.gov/other/webdata/external/materials/materials_manual/MDT_MATERIALS_MANUAL_121720_LETTING.pdf

The latest version of the Standard and Supplemental Specifications, Quarterly updates, and revision summaries can be found at the following website: https://www.mdt.mt.gov/business/contracting/standard_specs.shtml

The Question and Answer Forum opens at 5:00 p.m. on the bid letting advertisement date and closes at 10:00 a.m. on the Monday before the bid letting. If Monday is a state holiday, the forum will close on Friday before the bid letting at 3:00 p.m. Questions raised by potential bidders on this project and answers and other information posted by the Department on the "Question and Answer Forum" can be found at the website https://www.mdt.mt.gov/business/contracting/qacurrent.shtml up to 5 p.m. on the day before the bid letting.

The U.S. Department of Transportation (DOT) operates a toll free number at 1-800-424-9071, 24 hours a day - 7 days a week. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use this number to report such activities. All information will be treated confidentially, and callers may remain anonymous.

The Department attempts to provide reasonable accommodations for any known disability that may interfere with a person participating in any service, program or activity of the Department. Alternate accessible formats of this document will be provided upon request. If reasonable accommodation is needed to participate in Department bid lettings, call the Civil Rights Bureau at 444-6331 or TTY 406-444-7696 [TTY 1-800-335-7592 (toll free)].

1. PROJECT DESCRIPTION [102]

Bridge rehabilitation including bridge deck, approaches and rail, PMS cold milling and overlay on the Bridge Deck S-234 South of Havre project in Hill County. The project is located on Urban route U-5708 between RP 1.85 and 2.02 (this segment was formally on Secondary 234).

2. CONTRACT TIME [108] (REVISED 1-21-16)

The work begins on the effective date stated in the Notice to Proceed (NTP) and is to be completed in 80 Working Days. The NTP will be issued with an effective date of March 22, 2021.

3. CONTRACT DOCUMENTS [102] (ADDED 9-17-20)

The following documents are now available within the Contractors Reference Material on the Department's Contracting and Bidding webpage https://www.mdt.mt.gov/business/contracting/ :

- Table of Contractor's Submittals
- Traffic Control Rate Schedule
- Erosion Control Rates

4. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 1-18-18)

The DBE goal for this contract is 0.0%. Use the AASHTOWare Project Bids™ Electronic Bid System (EBS) to print the DBE submittal and timing requirements. If the contract does not have a project-specific goal, the field will display in the AASHTOWare Project Bids™ bid file as a blank field.

List the DBE commitments in the EBS file. An on-line DBE Directory is available at: https://app.mdt.mt.gov/dbe/dbe/search.

If the DBE goal cannot be met, show a good faith effort per the Good Faith Effort Criteria and supporting forms, available at: http://www.mdt.mt.gov/publications/forms.shtml. Submit the Good Faith Effort documentation within 48 hours of the bid opening.

5. DBE QUOTES [102] (REVISED 3-10-16)

The Department has a quick and easy way for you to request quotes from Montana DBE-certified companies. The information goes to the DBE companies that same day. The on-line form is located at web site: https://app.mdt.mt.gov/dbeqt/.

Call the Department DBE Supportive Services, 1-800-883-5811, for further assistance. Using this online request form will be considered for good faith efforts, but it does not constitute meeting all requirements of good faith efforts.

6. DBE USAGE [102] (REVISED 2-13-20 M)

Contract specific goals are not placed on contracts; however, the Department has an overall 6.5% DBE goal it must achieve. To assist contractors in determining their DBE commitment level, the Department has reviewed the estimates for this contract, and has established an aspirational goal of 0.0% DBE usage. Although not a contract requirement, the Department believes that the aspirational goal can realistically be achieved through race neutral measures based on current availability of DBEs and standard competitive procurement processes. While the utilization is not mandatory to be awarded the project, continuing utilization of DBE firms on contracts supports the success of Montana's DBE Program.

Any project listing a 0% DBE aspirational goal does not mean that a DBE may not be used on that project. A 0% DBE aspirational goal may have been established due to any of the following reasons:

- Limited identified subcontracting opportunities;
- Minimal contract days; and/or,
- Small contract dollar amount.

Contractors are encouraged to identify any opportunities to subcontract to DBEs.

The Department's DBE directory may be found at the following website: https://app.mdt.mt.gov/dbe/dbe/search.

7. LABOR REQUIREMENTS [102] (REVISED 9-5-19)

Pay the minimum wage rates contained elsewhere in the bid package. Comply with the required contract provisions contained in the form FHWA 1273 included with this contract. To obtain more information, contact the Department's Construction Engineering Services Bureau at 2701 Prospect, Helena, MT (406)475-2258, (800)335-7592 (TTY) or (406)444-7297 (Fax). The

local employment service office, designated by the Workforce Service Division, Department of Labor & Industry, for this project is Havre.

Executive Orders 13658 and 13706 do not apply to this contract.

8. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 3-12-20)

The Contractor and all subcontractors must use AASHTOWare Project Civil Rights & Labor™ (CRL) to submit Certified Payrolls (CPRs). Ensure that all subcontractors have submitted their Vendor Access Form which can be found on the following page: https://www.mdt.mt.gov/business/contracting/prevailing-wage.shtml to the Department and have received their login IDs prior to work.

Request the contract number and project ID(s) from the Project Manager. Provide the information to all subcontractors subject to the FHWA 1273 requirements. This information is also available using the Search Awarded Contracts located at: https://app.mdt.mt.gov/project-search/project/search.

Provide assistance and ensure all subcontractors submit CPRs electronically into CRL within the required timeframe.

9. ZONE PAY [102] (REVISED 5-10-18)

Wage rates and zone pay requirements can be found elsewhere in the proposal. The mileage for determining the zone is 113 miles.

Indicate the Zone requirements for all classifications. Provide this information to the Project Manager at the Preconstruction Conference on Form MDT-CON-102_02.

10. CONSULTANT ENGINEERING AND INSPECTION (CEI) ADMINISTERED PROJECTS

This project will use CEI services to administer the project. The CEI will be the authorized representative for the department as the Project Manager and Inspectors.

11. BIDDING REQUIREMENTS – PROPOSAL GUARANTEE [102] (REVISED 12-17-20)

Subsection 102.07(C)(2), Proposal Guarantee, of the Standard Specifications is hereby rescinded and replaced with the following:

Proposal Guarantee. The bid bond is on the most current version of MDT-CTP-102-07-1; is signed and sealed in the proper places; a copy of the agent's Power of Attorney for the insurance company is attached; and contains the correct and complete project number; all signatures are original (stamped signatures are unacceptable). A qualified third-party surety agency must verify the proposal guarantee. Electronic bid bond verification must be submitted through AASHTOWare Project Bids and Bid ExpressTM . Contact Bid Express for more information on electronic bid bond verification.

If an error occurs with electronic bid bond verification through AASHTOWare Project Bids and Bid Express, submit the Electronic Bid Bond Form MDT-CTP-102-07-2 in Adobe PDF format via email to mdtcntplns@mt.gov prior to the bid opening. Hard copy or paper bid bonds submitted to the Department will not be accepted. Bids that include submission of a bid bond without electronic verification or Electronic Bid Bond Form CPB_102_07 will be deemed non-responsive.

12. DELIVERY AND PUBLIC OPENING OF PROPOSALS [102] (ADDED 9-17-20)

Subsection 102.10(A) Bid Submission by Sealed Envelope is hereby rescinded. Submissions by sealed envelope will be deemed non-responsive.

13. 103.07 EXECUTION AND APPROVAL OF CONTRACT [103] (ADDED 6-13-19)

Use DocuSign to sign the contract in accordance with Subsection 103.07.

No later than 5 calendar days after the date of bid-opening (the date of bid opening to count as the first full day), the apparent low bidder must submit to Construction Contracting Bureau, during its regular work hours, a fully completed Contract Recipients Form documenting names and emails of authorized agents of the Contract and Surety to sign the contract. If the 5th day is a holiday, turn the documentation in earlier. The Contract Recipients Form is available at the following web page: https://www.mdt.mt.gov/publications/forms/contract-recipients.shtml.

The bid proposal may be considered non-responsive and rejected if the above form(s) are not submitted within the required time frame.

14. BIDDER'S PROPOSED AGGREGATE SOURCE(S) [103] (REVISED 1-24-19)

No later than 7 calendar days after the date of bid-opening (the date of bid opening to count as the first full day), the apparent low bidder must submit to Construction Contracting Bureau, during its regular work hours, a fully completed Form MDT-CON-106-02-3 for each aggregate source the bidder used to prepare its bid, or a subcontractor used to prepare its quote, if used by the bidder for its bid. (If the 7th day is a holiday, turn the documentation in earlier.)

The Bidder's Proposed Aggregate Source form is available at the following web page: http://www.mdt.mt.gov/publications/forms.shtml#hig.

The bid proposal may be considered non-responsive and rejected if the above form(s) are not submitted within the required time frame.

15. SUBMISSION OF CERTIFIED CLAIMS [105] (ADDED 4-23-20)

This provision rescinds and replaces the first two paragraphs of Subsection 105.16.2.

If an agreeable resolution is not reached within 14 calendar days of the written notice, the Contractor may submit a Certified Claim by completing the Certified Claim form MDT-CON-105-16-2 to the Project Manager no more than 7 calendar days after receipt of the Project Manager's response. The form is available from the Project Manager or the Department's website. Include all Claim Cost Records to date with the Certified Claim. Submit electronic copies to the DCE and the CES Engineer of the Engineering Division. The Project Manager will continue to attempt to resolve the disagreement after the Certified Claim is submitted.

Detail the following, if applicable, in the Certified Claim:

A. Summary. (label page 1.1 through page 1.X) Include a detailed, factual statement of the claim for additional compensation and contract time, if any, with necessary dates and locations of work involved in the claim. Also include detailed facts supporting the Contractor's position.

B. Proof of Notice. (label page 2.1 through page 2.X) Submit notice of claim with all attachments that was furnished to the Department. Include the date when the written notice was given.

C. Supporting Documents. (label page 3.1 through page 3.X) Furnish copies of the contract specifications that support the Contractor's claim.

D. Theory of Entitlement. (label page 4.1 through page 4.X) Include a narrative of how or why the specific contract specifications support the claim.

E. Itemized Lists. (label page 5.1 through page 5.X) Provide an itemized list of claimed damages that resulted from the event with a narrative of the theories and records and documents used to arrive at the value of the damages.

F. Time Requests. (label page 6.1 through page 6.X) Provide additional contract time requests if the claim is for a combination of additional compensation and contract time. Submit a copy of the schedule that was in effect when the event occurred and a detailed

narrative which explains how the event impacted contract time. In addition, if the Department-caused delay is claimed, provide the following:

1) Include the specific days and dates under claim;

2) Provide detailed facts about the specific acts or omissions of the Department that allegedly caused the delay, and the specific reasons why the resulting delay was unreasonable; and

3) Provide a schedule evaluation that accurately describes the impacts of the claimed delay.

G. Expense Records. (label page 7.1 through page 7.X) Submit copies of actual expense records. Include documents that contain the detailed records which support and total to the exact amount of additional compensation requested. Include the information and calculations necessary to support that amount. At a minimum, provide the following:

1) Direct materials.

2) Direct equipment. The rate claimed for each piece of equipment not to exceed the actual cost. For each piece of equipment, include a detailed description of the equipment and attachments, specific days and dates of use or standby, and specific hours of use or standby.

3) Direct labor; and

4) Other categories as specified by the Contractor or the Agency.

H. Supporting Records. (label page 8.1 through page 8.X) Provide additional supporting records and documents including copies of, or excerpts from the following:

1) Any documents that support the claim, such as manuals standard to the industry and used by the Contractor; and

2) Any daily reports or diaries related to the event, photographs or media that help explain the issue or event.

I. Certification. (label page 9.1 through 9.X) Provide a certified statement, signed by a representative authorized to execute change orders, by the Contractor, subcontractor, supplier, or entity originating the claim as to the validity of facts and costs

J. Lower Tier Claim. (label page 10.1 through 10.X) If the claim includes work done or costs incurred by any subcontractors, suppliers, or any entity other than the Contractor, the following are required:

1) Copies of the Contractor's, subcontractor's, supplier's and entity's (at all tiers above the level of which the claim originates) separate evaluation of entitlement.

2) Copies of the Contractor's, subcontractor's, supplier's and entity's (at all tiers above the level of which the claim originates) independent verification and evaluation of the amount of damages sought; and

3) An authorized representative to execute change orders on behalf of the Contractor, Subcontractor, Supplier and Entity (at all tiers above the level of which the claim originates).

If the Project Manager determines that additional information, records, or documentation is needed to allow proper evaluation of the claim submittal, the Project Manager will request the information, records, or documentation. Submit the requested information to the Project Manager within14 calendar days.

If the claim includes requests for delay compensation, follow all procedures in Subsection 108.07.6.

16. UTILITY INVOLVEMENT AND COORDINATION

Coordinate construction activities near existing utilities with the affected utility companies. Use extreme caution when working near, above, or below existing power, gas, water, sanitary sewer and telephone utilities.

Contact the following utility companies two weeks in advance of construction activities within two feet of buried facilities to coordinate construction activities and workplace safety.

Additional compensation for delays and work required to avoid existing and relocated utilities will not be considered.

CenturyLink: Brent Bushnell
(406) 441-7649
1021 Chestnut Ave.
Helena, MT 59601

17. STEEL PRICE ADJUSTMENT [106] (REVISED 4-25-19)

A. General. The Department may apply a Steel Price Adjustment to payments for the applicable steel items of work listed in the contract as payment to the contractor or a credit to the Department. Payments will only be made for fluctuations in the cost of the steel used in the items of work listed in the contract. No adjustment will be made for changes in the cost of manufacturing, fabrication, shipping, or storage.

Payments may be positive, negative, or non-existent depending on the circumstances. Payments or deductions for the steel price adjustment will be calculated by the Project Manager. No steel price adjustments will be made for any products manufactured from steel purchased from the mill prior to the letting date.

Notify the Project Manager in writing by the Notice to Proceed date or at the pre-construction conference, whichever comes first, of intent to participate in steel price adjustment. The price adjustment will be based on a base price per pounds of steel. The base price is provided to the Department by the National Steel Bridge Alliance monthly and updated as necessary.

- The current base price per pound of steel is: $0.55.

The Department will use the Bureau of Labor and Statistics Producer Price Index (BLS PPI) “Steel Mill Products” Series ID WPU1017 not seasonally adjusted. The index used will be the final version of the index, revised 4 months after the original publication, including any corrections to the index or rebasing of the index.

B. Applicable Bid Items. The Department may apply a steel price adjustment to steel quantities in certain items. The cost of the steel within the item must be at least $5,000 to qualify for a steel price adjustment.

Nuts, bolts, rebar chairs, connecting bands, and other miscellaneous hardware items will not be included in the price adjustment. No other items will be considered for a price adjustment.

C. Steel Price Index. Furnish the following documentation for all steel bid items applicable to the steel price adjustment:

1) The weight of steel (pounds) to be incorporated into the various items of work covered by this special provision.

2) Steel Certification and Mill Test Reports.

3) The date that the steel item, subject to adjustment, was shipped from the producing mill.

Accompany the above documentation by an affidavit signed by the Contractor stating that the information provided is true and accurate. Submit all documentation, including the affidavit, to the Project Manager prior to incorporating the steel into the work. This provision in no way modifies or cancels the requirements of Subsection 106.09.

D. Steel Price Adjustment. Adjustments may be positive, negative, or non-existent depending on the difference between the Base Index (IB) and Current Index (IC). No price adjustment will be made unless the IC is 10% higher or lower than the IB.

For Increases:

Adjustment Factor (AF) = (IC/IB-1.1)
If AF is equal to or less than 0, no adjustment.

If AF is greater than 0.0, continue
Price Adjustment = AF x quantity x base price

For Decreases:

Adjustment Factor (AF) = (IC/IB-0.9)
If AF is equal to or greater than 0, no adjustment.
If AF is less than 0.0, continue
Price Adjustment = AF x quantity x base price

Where:
IB = BLS PPI for month contract was let
IC = BLS PPI for month material was purchased from the mill (invoice date)

18. CONSTRUCTION EQUIPMENT ON STRUCTURES (REVISED 7-16-20)

A. Description: Requirements associated with the operation of equipment on structures.

B. Definition. The following definition applies to this special provision:

- Equipment. Any vehicle or machine weighing more than 5000 pounds.

C. Construction Requirements. Do not use bridges as work platforms, work bridges, or to support or move equipment without the Project Manager's written approval. The Project Manager may require a full Engineering Submittal at their sole discretion.

1) For bridges having no posted load restrictions and no removal of deck concrete (not milled), provide a full Engineering submittal for approval for all equipment utilizing outriggers on the structure and for any equipment not already approved under one of the following conditions:

a) Legal Loads. A vehicle that is a legal load as defined by Montana Code Annotated (MCA).

b) Pre-Approved Equipment. The equipment is currently listed on MDT's Approved Construction Equipment List (ACEL) and will be operated according to any conditions stated in the ACEL.

2) For bridges with a posted load restriction or if bridge deck concrete is partially milled or removed, submit a full Engineering submittal for approval for any of the following cases:

a) Equipment weight exceeds 25 tons.

b) Vehicle weight and configuration does not satisfy the posted load restriction.

c) More than one piece of equipment will be simultaneously located on a span.

d) Concrete removal results in debonding of the top mat of deck reinforcing steel.

e) Repairs to bridge beams or truss members are specified in the contract and repairs are not complete.

f) Equipment outriggers will be used.

3) Full Engineering Submittal requirements. Submit an engineering analysis and report performed by a Professional Engineer registered in Montana.

a) Engineering analysis. Clearly describe loading conditions and assumptions and provide calculations. Investigate an envelope within which the equipment may function without damaging the structure or endangering workers or the public. MDT proposes the following topics, at a minimum. Provide additional information when necessary.

(1) Load Cases.

(a) Minimum suggested live load vehicles are Type 3 and Type 3S2 trucks in live load combinations from AASHTO "Manual for Condition Evaluation of Bridges."

(b) Consider all loads on the bridge including axle loads, outriggers, equipment dynamic forces, and wind forces on the load, the boom, and the equipment. Consider deflection

and secondary force effects. Include traffic live load if the structure will carry traffic during equipment operations.

(c) Investigate different loading combinations for all configurations. Include the distribution of dead load and changing center-of-gravity of the equipment with and without load at different boom extensions, rotations, and elevations.

(2) Structural Effects. Identify critical members. Determine any conditions under which the equipment cannot safely operate.

b) Written Report. Provide a report containing a narrative summarizing the results of the analysis. Describe special measures necessary to protect the structure through all phases of the equipment's positioning and use. Include drawings as necessary and indicate any minimum equipment clearances to relevant portions of the structure and to traffic flow. Estimate the work's duration.

c) MDT will consider equipment submitted under this contract for addition to the ACEL.

D. Method of Measurement. Work associated with this provision is not measured for payment.

E. Basis of Payment. Include all costs associated with the requirements of this provision in the cost of other items.

19. TELECOMMUNICATION OR VIDEO SURVEILLANCE EQUIPMENT, SERVICES, OR SYSTEMS [107] (ADDED 10-08-20)

2 CFR 200.216 has been added to the Code of Federal Regulations and became effective August 13, 2020. Ensure any telecommunications or video surveillance equipment, services, or systems used or installed on Federal-Aid Projects comply with 2 CFR 200.216.

20. STORM WATER PERMITTING REQUIREMENTS UNDER THE MONTANA POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [107] (REV 3-16-17)

A. Description. The Montana Department of Environmental Quality (DEQ) regulates storm water discharges under the MPDES program. If the bid package contains blank erosion control plans, a construction storm water discharge permit authorization will be required. If not, a storm water discharge permit authorization may be required for this project depending on Contractor’s operations. Sum the disturbance area (as defined by DEQ) identified in the contract with the area of disturbance caused by contractor operations to determine if the permit acreage threshold is exceeded. Contractor operations can include, but are not limited to, the following support activities: staging areas, access roads, material storage areas, temporary concrete or asphalt batch plants, borrow areas, areas used for fill placement, etc. If the summed disturbance area is one acre or more, use the DEQ authorization to discharge under the MPDES General Permit for Storm Water Discharges Associated with Construction Activity for this project. In order to facilitate permit transfer, separate NOI packages are required for areas within the right-of-way and areas outside of the right-of-way. A Notice of Intent (NOI) package includes a Notice of Intent, with a topographic map, a Storm Water Pollution Prevention Plan (SWPPP), the erosion control plans, sage grouse consultation letter, if applicable, and supporting documentation.

Blank Erosion Control Plans, and a topographic map, are provided with the plans if the plans include greater than 1 acre of disturbance. Complete the erosion control plans as required by the general permit. Complete the SWPPP using DEQ’s most current SWPPP Form.

B. Materials. Follow the requirements described in the Department’s *Erosion and Sediment Control Best Management Practices Manual (December 2016).* Rescind Section 208 detailed drawings. Submit to the Project Manager for review and acceptance BMPs proposed for use that are not included in the Manual.

C. Construction Requirements.

1) MPDES Permit Required.

a) Submit one NOI package and the associated fees to DEQ for ground disturbance areas shown in the plans or within the right-of-way. For ground disturbance areas shown in the plans and any other areas within the right-of-way where Contractor activities causing ground disturbance are planned, the Contractor is the sole permittee until construction is complete and the General Permit is transferred to the Department or another entity.

The Department is not responsible for delays caused by incomplete or inaccurate submittals by the Contractor.

Comply with the requirements of the General Permit for Storm Water Discharges Associated with Construction Activity and implement the SWPPP. Provide two copies of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Do not begin construction activities until the required copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ is received by the Project Manager.

b) Submit a separate NOI package and the associated fees to DEQ for ground disturbance and support activity areas outside the right-of-way and not shown in the plans. Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans, are the Contractor's responsibility and must be submitted under a separate NOI package from the ground disturbance within the right-of-way. For all support activities outside the right-of-way which are not part of a larger commercial operation serving multiple unrelated construction activities, and will not continue operation beyond the completion of the contracted road construction activity, a notice of intent package must be submitted to DEQ to obtain an authorization under the storm water construction permit. Sand and gravel borrow area operations, gravel pits, and/or concrete batch plants that will continue operation beyond the completion of the contracted road project, are part of a larger commercial operation, or serving multiple unrelated construction activities must obtain permit coverage under the Multi-Sector General Permit for Storm Water Discharges Associated with Industrial Activity (MSGP) regardless of acreage size of the activity if the activity does not already have MSGP authorization. The Contractor is the sole permittee until stabilization is complete and the General Permit is terminated or transferred to another entity. The Department is not responsible for delays caused by incomplete or inaccurate submittals to DEQ by the Contractor.

Provide a copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Be responsible for all temporary erosion, sediment, and pollution prevention controls for Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans.

c) Complete and document all inspections in accordance with the requirements of the General Permit for Storm Water Discharges Associated with Construction Activity. Use DEQ's most current self-inspection form available online at: http://deq.mt.gov/Water/WPB/mpdes/stormwaterconstruction. Provide a copy of all inspection reports to the Project Manager.

Report potential noncompliance in accordance with applicable regulations, guidance, and permit conditions. Submit to the Project Manager within seven days of sending or receiving all correspondence to or from regulatory agencies regarding potential noncompliance or violations.

The temporary erosion and sediment control measures and devices to prevent pollution and control sediment transport and soil erosion will be inspected as part of the final inspection to ensure they are maintained and functioning properly. Do not transfer or terminate the General Storm Water Permit coverage until the BMPs are inspected and accepted and all records required under the permit, including inspection and monitoring reports, are furnished to the

Project Manager. The Department may require that certain Best Management Practices (BMPs) be replaced by another type of BMP as a condition of permit transfer.

Upon approval of site conditions, measures, devices and all pertinent records, submit a signed copy of the Permit Transfer Notification Form provided by the Department. When submitting the General Storm Water Permit transfer package/application to the Department, include a check for the permit transfer fee. Make the check for the amount of the fee payable to the DEQ. The Department is not liable for the completeness or accuracy of Contractor records completed prior to the permit transfer. Upon receipt of the signed form, the Department will obtain signature of the new permit owner and submit to DEQ. Ensure permit conditions and responsibilities are met until confirmation of the transfer is received from DEQ. Defend and hold MDT harmless from any violations, claims, enforcement actions, penalties or fines issued for Contractor activities or recordkeeping that occurred prior to the transfer of the General Permit for Storm Water Discharges Associated with Construction Activity authorization.

If the Department concurs that final stabilization has been met during the final walk-through, the Contractor may submit a Notice of Termination form to DEQ. Pay the annual fee invoice due at the time of termination. Submit the annual fee invoice to the Project Manager for reimbursement.

2) MPDES Permit not Required.

The BMP-Administration item is included in contracts that may not meet either criteria for a MPDES permit but include ground disturbing activities. Complete BMP inspections and install BMPs, if necessary, in accordance with Section 208, if no storm water permit is required. Utilize form MDT-ENV-014, Water Pollution Control Inspection Report. A certified SWPPP Administrator is not required to conduct the inspections if no permit is required.

D. Method of Measurement. DEQ MPDES fees and monitoring costs associated with obtaining and maintaining the General Permit for Storm Water Discharges Associated with Construction Activity for ground disturbance areas both within and outside the right-of-way are not measured separately for payment.

If no permit is necessary, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item.

E. Basis of Payment. No additional payment will be made for the DEQ MPDES fees and monitoring costs associated with the General Permit for Storm Water Discharges Associated with Construction Activity. Include these costs in the Temporary Erosion Control-Lump Sum bid item.

For project including the BMP-Administration item, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item. Partial payment for the BMP-Administration will be monthly based on the lump sum contract price in accordance with Table 208-1 in Subsection 208.05.1.

Payment for BMPs required by an event or extra work, and approved by the Project Manager, will be measured and paid for in accordance with the Erosion Control Rate Schedule contained in the contract at a unit price of $1.00 per unit.

21. MIGRATORY BIRD TREATY ACT COMPLIANCE - STRUCTURES [107] (REVISED 12-8-16)

Description. Migratory birds may nest on the structures affected by this project.

Construction Requirements. Use one or a combination of the following measures for structure removal or work that may directly impact active nests:

1) It is permissible to remove non-active nests (without birds or eggs), partially completed nests or new nests as they are built (prior to occupation).

2) Conduct work that may impact active nests outside of the nesting season, typically between the dates of August 16 and April 15, or when no active nests are present, or;

3) Install nesting deterrents meeting the requirements below prior to the nesting season as follows:

a) Cover or enclose all potential nesting surfaces on the structure with mesh netting or other suitable material to prevent birds from establishing new nests. Use netting or other material with no opening or mesh size greater than ½-inch. Maintain the material/enclosure until the structure is removed or work is completed, or;

b) Apply a non-toxic, non-lethal, bird roosting or landing repellent gel or liquid (do not use smell or taste deterrents) on all potential nesting surfaces on the structure in accordance with the manufacturer's instructions. Reapply the repellant as needed to maintain adequate coverage to prevent new nests from being established, or;

c) Prepare a description of alternate methods of effectively keeping birds from establishing nests during the nesting season, and submit them along with proposed installation dates and methods to the Project Manager for review.

Method of Measurement and Basis of Payment. Work described in this provision is not measured for payment. Consider all costs associated with this provision incidental to performance of the work. Include the cost in the cost of other items.

22. AIS WATERCRAFT AND EQUIPMENT INSPECTION [107] (ADDED 4-25-19)

Description. State laws, regulations, and rules are in effect in Montana to prevent the spread of AIS. The following website includes information to aid in the prevention of AIS: http://cleandraindry.mt.gov/.

Requirements. Contact Montana Fish, Wildlife & Parks (FWP) at least 2 weeks prior to operating equipment in or working within an aquatic resource. FWP may require additional inspection or action for aquatic invasive species (AIS) prior to equipment use in any aquatic resource in the State of Montana.

FWP Contact Information		
Fisheries Front Desk:	(406) 444-2449	
Watercraft Inspection Program Coordinator:	(406) 444-5383 – Office	(406) 546-3847 - Cell
Watercraft Inspection Specialist:	(406) 444-5540 – Office	(406) 465-6705 - Cell

1) Ensure all watercraft vessels and equipment that enters Montana from out of state, crosses the continental divide, or enters the Flathead basin is inspected by FWP prior to launch in an aquatic resource in the State of Montana.

2) Clean, drain, dry all watercraft and equipment according to FWP guidelines after exiting any aquatic resource and prior to launch into or use in another aquatic resource.

Method of Measurement and Basis of Payment. Work described in this provision is not measured for payment. Consider all costs associated with this provision incidental to performance of the work. Include the cost in the cost of other items.

23. PUBLIC INVOLVEMENT [107] (REVISED 4-25-19)

A. The Department may provide public relations or may hire a public involvement (PI) firm to develop and administer a communication plan. Coordinate activities with the PI firm or Department. The name and contact information for the PI firm will be available from the Project Manager following award of the contract.

Attend all public meetings held by the PI firm or Department. Public meetings may be held up to once per week. Provide a brief description of current operations, an anticipated schedule of work for the upcoming week, description of current detours, delays, closures, and possible effects on residents and businesses, such as temporary loss of access and construction traffic.

1) Coordinate with the PI firm or Department to develop a written summary of the intended operations at least 10 calendar days prior to the start of construction or any disruption of traffic.

2) Upon approval of a traffic control plan and at least 10 calendar days prior to beginning construction and disrupting traffic, coordinate with the PI firm or Department to provide appropriate information to the media. This information must specify at a minimum the impact of the construction on the public, duration, sequence of the work, and project overview.

B. Contractor Requirements – During Construction. For the purposes of this special provision, the period "during construction" is defined as the time beginning at the point when normal traffic operations are first disrupted and ending when all work is complete. During this period, perform the following tasks;

1) If requested, install signs on the project denoting the portable radio station information and Contractor phone number for problems and complaints regarding the project. Maintain these signs until the resumption of normal traffic operations. Install signs at locations approved by the Project Manager. Signs will be paid for in accordance with the Traffic Control Rate Schedule if required.

2) Coordinate with the PI firm or Department so they can contact and inform individual businesses and residents at least 3 calendar days prior to conducting operations at locations that may affect their access or convenience.

3) Provide contact information.

a) Provide a 24-hour contact number to the Project Manager for emergency use.

b) Provide a Contractor staffed local telephone number with live personnel available to answer the phone during working hours, for public comments, questions, or complaints. Ensure the telephone has been connected and in service before any work is commenced that has the potential for inconveniencing any residence or business establishment adjacent to the project. Make the phone number available to the public by furnishing it to the PI firm or Department for news/information releases and including it in the traffic advisory constant loop on the Department's portable radio station, if available. Do not use answering machines during working hours; answering machines are acceptable after working hours, with all messages answered by completion of the next workday. Maintain a written log of calls that identifies the caller; the nature of the comment, question, or complaint; and disposition. Make the log available to the Project Manager upon request.

c) Act within 24 hours to resolve complaints about safety and convenience. Refer changes in project design, traffic control, or extra work to the Project Manager for approval before acting.

4) The PI firm or the Department will update the media. Coordinate with the PI firm or Department so they can provide regular, at least once per month, project status reports and future impacts to the travelling public, landowners, and businesses. Make updates and traffic advisories available to them as well to facilitate positive news coverage. The goal is to garner news coverage of the project any time major changes or milestones occur.

Coordinate with the PI firm or Department so they can provide project advisories in the form of radio spots, if requested.

Ensure advisories include the Contractor provided contact number for the public to call for additional information. Coordinate with the PI firm or Department to update the advisories after every weekly progress meeting; or more often if conditions change substantially, such as significant unanticipated schedule changes and changes in detour routes as applicable.

C. Method of Measurement and Basis of Payment. Public Relations and coordination with the PI firm is not measured separately for payment.

This provision does not alter or cancel any other contract provision such as, but not limited to, control of the work, legal relations and responsibility to property owners, and measurement and payment.

24. NOTICE TO BIDDERS [108] (ADDED 11-21-08)

This project is funded in whole or in part by funds received from the Federal Highway Administration (FHWA), and its construction is wholly contingent on the state's continued receipt of those federal funds. If the federal funds are reduced or not received, the Department may choose to terminate the contract for convenience under the provisions of Subsection 108.10. Any bidder on this project, by submitting its bid, understands and accepts the possibility of the contract being terminated in the event federal funds are reduced or not available and by submitting a bid, each bidder waives any claims for costs or damages other than as specifically allowed by Subsection 108.10.2. In particular, bidders understand and accept that no payment will be allowed for any claimed anticipated profit for work not performed.

25. SALVAGE MATERIALS

A. Description. Salvage and haul all guardrail, bridge rail, posts, hardware, impact attenuators, and terminal sections to the MDT maintenance site located at 1649 US Highway 2 NW, Havre, MT 59501.

B. Materials. None

C. Construction Requirements. Contact Matt Ladenburg (406-262-5504, mladenburg@mt.gov) or Rob Gregory (406-262-5505, rgregory@mt.gov) one week before the start of construction activities and communicate the timeline for the delivery of the existing guardrail. MDT maintenance personnel will be responsible for unloading the guardrail and miscellaneous items.

D. Basis of Payment. Include all costs associated with this provision in the cost of other guardrail items.

26. LOCAL ROAD 802

Description. Maintain full access for Local Road 802 throughout construction

27. LONGITUDINAL JOINT COMPACTION [401] (REVISED 10-10-19)

Construct all longitudinal joints of new plant mix with either a notched wedge joint or taper the joint edges at a 4H:1V to 6H:1V slope. Confined joints created when paving against a vertically milled surface are excluded from the requirements of this provision.

If using a notched wedge, ensure the notched wedge joint has a vertical edge of at least the maximum aggregate size and no more than ½ of the compacted lift thickness and then taper down on a slope not steeper than 4H:1V. Uniformly compact the sloped portion of the plant mix notched wedge joint. Use a device attached to the screed for shaping and compaction. Submit information on the device used to the Project Manager.

When placing the second pass (hot lane), overlap the paver screed 1.0 ± 0.5 inches onto the cold plant mix. Do not “bump back” or rake the overlapped material.

Complete compaction rolling in accordance with Subsection 401.03.21. Compact the joint area to at least 91.0% of target maximum specific gravity as determined in accordance with MT 328 with the following exceptions:

- 90.0% - ⅜-inch (9.5 mm) mixes with plan depths of less than 0.12-foot (36 mm).

The joint density is determined from cores taken at randomly selected locations after all rolling is complete and before the roadway is open to traffic, based on the length of joint constructed. The joint area is defined as the tapered area at the overlap of the hot and cold lanes. Furnish the Department with a 4-inch or 6-inch core of the compacted joint for every 4000 feet of joint constructed, and at least 3 per project, at locations directed by the Project Manager. Center the core within the tapered area to include both the hot lane and cold lane. Mark the core as directed. Patch the core holes in accordance with Subsection 401.03.21.

Density acceptance by cores for longitudinal joints does not apply to leveling or isolation lifts that have a depth of less than 0.10-foot (30 mm) thick, or first lifts of plant mix surfacing placed directly over crushed aggregate courses.

Separate the plant mix lift to be tested from the total core. Cut the core to the actual lift thickness within ± 0.15-inch (4 mm). The Department recommends using a saw to separate the lift to be tested from the total core. Perform this work within the project limits or other approved location.

The Inspector will witness all of the above activities before traffic is permitted to use the plant mix lift being tested.

Furnish the core immediately to the Inspector after it is removed, marked and separated. Do not remove the cores from the Inspector's visual control at any time. Re-core as directed any time either the Contractor requirements or procedures within this section are not met. The test results of the replacement core to be used in the QA evaluation for the lot represented will be the actual relative in-place density unless it exceeds:

- 90%; then 90% will be used for the relative in-place density of that core in the QA evaluation.
- 89% for ⅜-inch (9.5mm) mixes with plan depths of less than 0.12 foot (36 mm); then 89% will be used for the relative in-place density of that core in the QA evaluation.

MT 328 is used to establish the target Rice density. The bulk specific gravity (AASHTO T 166) determined for each core will be divided by the target Rice density in effect at the time the hot lane mix was produced to determine the relative in-place density. In the event the rolling Rice density differs by 0.5 lbs/ft^3 between the hot and cold lanes, the Rice densities for that location will be averaged. All results will be reported to the tenth of one percent (0.1%).

The approximate joint quantity represented by each sub-lot is 4000 feet. Additional locations and tests may be required. The quantity represented by 5 tests or approximately 20,000 feet of longitudinal joint constitutes a lot whenever production schedules and material continuity permit. A lot represented by 3 to 7 consecutive random sub-lots will be established when there are short production runs, significant material changes, or other unusual characteristics of the work.

Include all costs of furnishing and cutting the cores in the cost of plant mix surfacing. No separate measurement or payment will be made.

Longitudinal joints are evaluated for density on a lot-by-lot basis in accordance with Subsection 105.03.2 using an F factor of 3. The pay adjustment will be calculated using the equation below. The unit cost will be $4.50/foot of joint. Length is the length of longitudinal joint in the lot.

Pay adjustment = (P/100) x Length x Unit Cost

A 0.05 pay factor will be applied to the lots of longitudinal joint when the average density for the lot (Xn) is from 92.0% to 95.0%, inclusive, of the Maximum Specific Gravity (Rice's Method) and the range (R) is 3 or less.

Include all costs associated with constructing the joint in the cost of plant mix surfacing.

28. EMULSIFIED ASPHALT CHFRS-2P [402] (ADDED 10-10-19)

Furnish CHFRS-2P for areas specified in the contract. Furnish CHFRS-2P in accordance with the table below. Polymerize CHFRS-2P emulsions using at least 3% polymer by weight (mass) of the asphalt binder.

POLYMER MODIFIED CHFRS-2P EMULSIFIED ASPHALT

Property	Test Method	CHFRS-2P
Viscosity at 122 °F (50 °C), sec.	AASHTO T 59	100-400
Sieve, %	AASHTO T 59	0.1 max.
Settlement, 5 days, %	AASHTO T 59	5 max.
Demulsibility, %	AASHTO T 59	60 min.

Property	Test Method	CHFRS-2P
Storage stability test, 1 day, %	AASHTO T 59	1 max.
Particle charge	AASHTO T 59	Positive
Tests on residue by evaporation:		
% residue[1]	AASHTO T 59	65 min.
Oil Distillate	AASHTO T 59	0.2 max.
penetration, 100 g, 5 sec. at 77 °F (25 °C), dmm	AASHTO T 49	90-160
ductility at 77 °F (25 °C), 5 cm per minute, cm	AASHTO T 51	75 min.
elastic recovery, %	AASHTO T 301	55 min.
Softening Point, °F	AASHTO T 53	130 min.
Float Value @ 140 °F, Sec	AASHTO T 50	1800 min.
Viscosity @ 140 °F, Poise	AASHTO T 202	1300 min.
Solubility in Trichloroethylene, %	AASHTO T 44	95 min.

29. BASE PRICE FOR CONCRETE [551] (REVISED 12-17-20)

Price reductions measured by the cubic yard will be calculated using the greater of the contract bid price or $500 per cubic yard for the following items:

- Class Deck
- Class Overlay
- Class Structure
- Class Structure – Low Slump

Price Reductions for Class Drilled Shaft item will be calculated using the greater of the contract bid price or $300 per cubic yard.

30. CONCRETE – CLASS STRUCTURE LOW SLUMP (ADDED 5-14-20)

A. Description. Use Concrete – Class Structure Low Slump for all full depth bridge deck concrete, bridge barrier rail, and metal bridge rail curbing.

B. Construction Requirements. Provide material meeting the requirements of Concrete – Class Structure, with the following modifications:

1) The maximum target value for slump is 3-inches with a tolerance of plus 1½-inches to minus 2-inches.

2) Overall Lot Pay Factor. The overall lot pay factor will be calculated for all bid items using Concrete – Class Structure Low Slump, except metal bridge rail.

3) Applicable Pay Factors. See Table 551-9 for applicable pay factors. Pay factors for strength, air content, and gradation are applicable. The pay factor for permeability is not applicable.

C. Measurement. Concrete – Class Structure Low Slump is measured by the cubic yard.

D. Basis of Payment. Include all costs associated with this provision in the bid price for Concrete – Class Structure Low Slump (CUYD).

31. BRIDGE DEMOLITION NOTIFICATION

A. Description. Prior to demolition of structures in Montana, including highway bridges, a notification form is required to be submitted to the Montana DEQ Asbestos Control Program. The Montana Demolition Notification form MTACP02 is available through the program internet site at http://deq.mt.gov/Public/asbestos/Forms. Direct questions regarding this special provision to the construction Project Manager (PM).

An inspection of the bridge has been conducted, including a review of as-built drawings and inspection photos for the bridge structures, and sampling of suspect materials. No asbestos containing materials have been identified. A copy of the asbestos inspection is available from MDT.

B. Construction. Submit the completed form to DEQ and the project PM at least 10 days prior to commencement of any bridge demolition activities. Provide a copy of the notification acknowledgement to the PM upon receipt from the DEQ.

C. Measurement and Payment. Measurement and payment for the notification is included in other items.

32. MODIFIED BRIDGE DECK CONCRETE WATER CURE [551] (REVISED 3-2-2020)

A. Description. Protect full depth bridge deck concrete from shrinkage and thermal cracking.

B. Materials

1) Burlap. Furnish burlap in accordance with Subsection 717.01.2.

2) Water. Furnish water in accordance with Subsection 713.01.

3) Temperature data logging. Submit for approval a temperature monitoring system having at least 4 channels, capable of measuring internal concrete and ambient temperatures, recording time and temperature at 30-minute intervals or less for a minimum of 14 days, with an accuracy of 1 degree or less.

C. Construction Requirements.

1) For each concrete placement, install 4 probes at 3 locations on the deck (12 probes total per placement) in concrete a minimum of 5 feet away from any edge or joint. For placements that are less than 10 cubic yards, place only 4 probes at one location. Place and secure probes at 4 depths within the deck as follows:

- at least 2 feet above deck surface. This probe may be moved to the edge of deck to facilitate attachment;
- to the top of the top mat of rebar;
- midway between the 2 mats of rebar, and;
- to the bottom of the bottom mat of rebar.

2) Start recording temperatures at least 1 hour prior to concrete placement. Ensure probes read within 3.6 °F (2 °C). Replace probes that do not. Protect probes during concrete placement. Relocate any displaced probes within wet concrete. Monitor and record ambient air temperature while recording probe temperatures. Monitor concrete temperature probes until concrete is within 5 °F (2.8 °C) of ambient, and vertical temperatures through the deck thickness are uniform (within 10 °F [5.5 °C]) and concrete is at least 96 hours old (72 hours old if concrete does not contain silica fume). Exception: for cold weather concrete, monitor temperatures until cold weather protection is removed

3) Increase ambient humidity by fogging above finished concrete and concrete forms/rebar using one or more 3000 psi (21MPa) or greater pressure washer powered fogging wands. Do not:

- use low pressure spray nozzles;
- use fogging systems attached to the screed;
- use fogging, or other methods, to add finishing water to unfinished concrete;
- allow water to drip, flow, or puddle on the concrete surface during fog misting, when placing the burlap, or at any time before the concrete has achieved final set.

4) Maintain the forward edge of concrete placement nearly parallel to and not more than 6 feet (1.8 m) ahead of the strike-off.

5) Use catwalk(s) to facilitate uniform application of the fog mist across the entire deck and to facilitate placement of the wet burlap on the fresh concrete surface. Apply a fog mist as necessary to maintain a moist surface on the finished concrete before and after covering with burlap until the water cure process is operational.

6) Start the water cure as soon as possible without damaging the concrete finish by applying pre-moistened burlap to maintain a water-saturated environment on the concrete surface. Meet the following requirements for the water cure.

a) Ensure the temperature of all water used in the water cure is within 20 °F (17 °C) of the in place concrete temperature.

b) Presoak the burlap by immersing it in water for at least 24 hours prior to placement.

c) Apply the wet burlap to the concrete surface no later than 15 minutes after striking off and finishing the surface of deck-slab concrete.

d) Place soaker hoses when the concrete has hardened sufficiently to prevent marring of the surfaces.

e) Keep the entire deck surface saturated for 3 hours (1 hour for cold weather concrete, unless otherwise approved by the Project Manager) after concrete has reached maximum temperature as recorded by the probes. Immediately turn off soaker hoses and apply clear plastic sheeting over the wet burlap to keep concrete moist.

f) Apply cold weather insulation blankets to minimize the rate of cooling of concrete immediately following the installation of plastic sheeting.

g) Remove all curing and allow deck to dry when concrete is within 5 °F (2.8 °C) of ambient, and vertical temperatures through deck thickness are uniform (within 10 °F [5.5 °C]) and the concrete is at least 96 hours old (72 hours old if concrete does not contain silica fume).

D. Method of Measurement and Basis of Payment. Fogging and water cure will not be measured separately for payment. Include all costs associated with this provision in the concrete receiving the cure.

33. BRIDGE DECK REINFORCING STEEL COVER (REVISED 12-28-09)

A. Description. The Department may measure the depth of the concrete cover over the top reinforcing steel of the bridge deck(s) and the deck thickness, using Ground Penetrating Radar (GPR) equipment.


B. Construction Requirements. Schedule three business days for the Department to access the deck. Ensure the deck is completely bare during the three business-day period, or until the test is complete, to allow full access to the entire surface. The timeframe for access to the bridge deck is after the water cure has been completed and prior to opening the bridge deck to traffic. The Department will perform the test only on a dry deck. The test may be completed either prior to or after transverse deck grooving or rail construction. If inclement weather prevents the test from being performed within the three business days provided, the test will be cancelled. Provide the project manager a minimum of 14 calendar days' notice for the three business-day access period. The project manager will coordinate the test with the MDT Materials Bureau (contact: Anson Moffett 444-5407).

C. Method of Measurement and Basis of Payment. Consider all costs associated with this provision and its requirements incidental to performance of the work. Include the costs in the cost of other items.

34. BARRIER END DETAIL

A. Description. This work is providing bridge approach rail connections for both Type 3 (NCHRP 350) and MGS (MASH) approach rail.

B. Construction Requirements. Provide connection details that use the following dimensions:

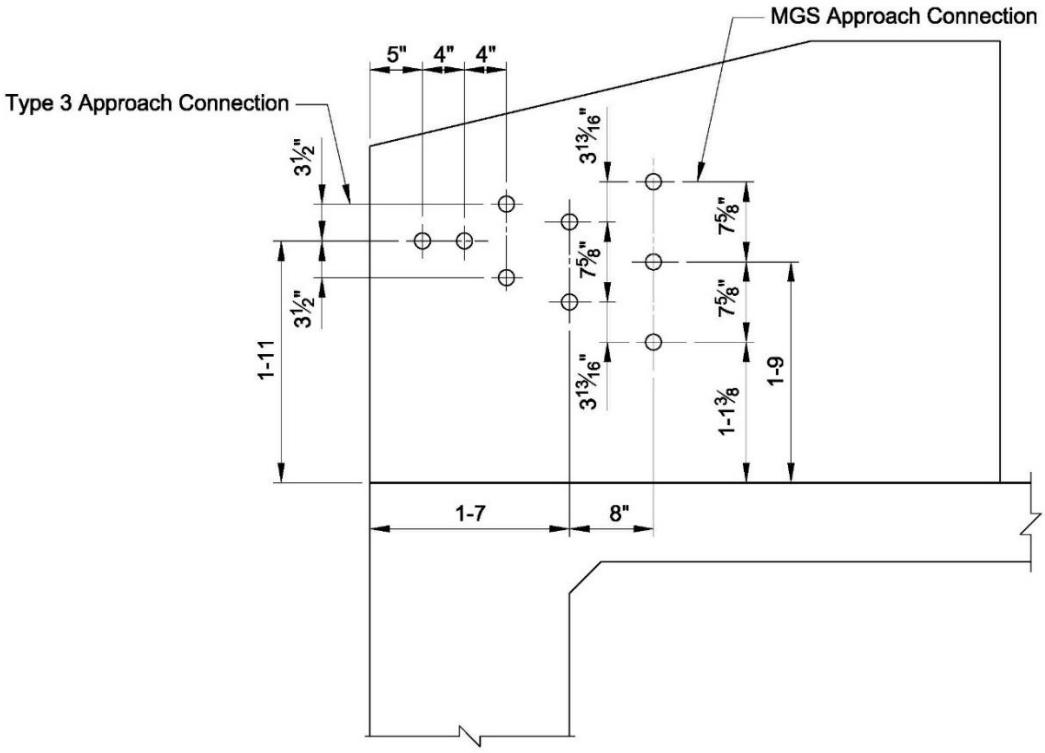

C. Method of Measurement. Barrier end detail will not be measured for payment.

D. Basis of Payment. Include all costs associated with providing both bridge approach connection patterns in the unit price bid for 42 in. Open Rail Parapet – BR-CSC.

35. MODIFY BRIDGE APPROACH SLAB

A. Description. Edge portions of the concrete bridge approach slabs may conflict with some of the posts of the new guardrail bridge approach sections. Modify the concrete bridge approach slab as necessary to accommodate the installation of the posts.

B. Construction Requirements. Place a 1/2 inch deep neat saw cut line around the perimeter of the removal area as necessary to place the posts of the bridge approach section. Remove the cut out concrete and replace in kind with plant mix to maintain the slab and curb shape.

C. Method of Measurement. Each side of the bridge approach slab that is modified will be paid for. For example, if an approach slab has one side modified, the quantity would be one Modify Bridge Approach Slab. If the approach slab has both sides modified, the quantity would be two.

D. Basis of Payment. Include all costs associated with providing all materials, labor, tools, equipment, and incidentals necessary to complete the work in the unit price bid for Modify Bridge Approach Slab.

36. EXPANSION JOINT – PRECOMPRESSED [707] (ADDED 10-08-20)

A. Description. This work is furnishing and installing a preformed, pre-compressed, self-expanding, sealant system with a silicone pre-coated surface.

B. Materials. Use a joint system designed to withstand an HL-93 truck loading and impact in accordance with AASHTO specifications. Furnish materials comprised of the following 3 components:

1) Cellular polyurethane foam impregnated with hydrophobic 100% acrylic, water-based emulsion, factory coated with highway-grade, fuel resistant silicone.

2) Field-applied epoxy adhesive primer.

3) Field-injected silicone sealant bands.

Use an impregnation agent having proven non-migratory characteristics. Furnish a highway-grade, low modulus, fuel resistant silicone applied to the impregnated foam sealant at a width greater than maximum allowable joint extension and which when cured and compressed will form a bellows. Furnish expansion joint foam seal having a depth as recommended by the manufacturer. Ensure joint system is capable of movements of +50%, -50% (100% total) of nominal material size. Use factory-fabricated transition assemblies where changes in plane and direction are necessary. Ensure transitions are watertight at inside and outside corners through the full movement capabilities of the product.

C. Construction Requirements. Provide accurate dimensions of the joint length and opening size to the joint manufacturer so they can appropriately size the joint system.

Prepare the joint opening in accordance with the manufacturer's recommendations.

Ensure all concrete surfaces adjacent to the joint are in sound condition.

Repair any unsound concrete in accordance with the manufacturer's recommendations.

Install the joint system using the manufacturer's standard field-applied epoxy adhesive. Install the joint system such that when the field-applied injection band of silicone is installed between the substrates and the foam-and-silicone-bellows, the system will be recessed ½-inch (12.5 mm) below the substrate surface. Do not permit vehicle traffic to travel over the joint for a period of 3 hours after installation is complete.

1) Submittals.

a) Certifications. Certify that the joint material meets the following:

(1) Free in composition of any waxes or asphalts, wax compounds, or asphalt compounds.

(2) Capable of withstanding 150°F (65°C) for 3 hours while compressed down to the minimum of movement capability dimension of the basis of design product (-25% of nominal material size) without evidence of any bleeding of impregnation medium from the material.

(3) That the same material after the heat stability test will self-expand to the maximum of movement capability dimension of the basis-of-design product (+30% of nominal material size) within 24 hours at room temperature 68°F (20°C).

b) Shop Drawings. Submit shop drawings describing the following:

(1) Name of the manufacturer.

(2) Joint dimensions.

(3) Joint location and details of field splices, and

(4) Expansion joint at curbs and sidewalks.

Do not begin fabrication of the joint until the Department has approved the shop drawings.

c) Work Plan. When the contract requires casting of new concrete at the joint location, submit a work plan describing the procedures that will be used to form the joint opening. Include the following in the work plan:

(1) Joint Width. Provide methods that will ensure the joint is constructed to the plan joint opening width. Consider that the joint opening width will change with temperature before, during and after concrete placement. Use methods and/or sequencing that prevent shoving of the concrete during thermal expansion of the span(s). Request approval for additional construction joints not shown in the plans if needed.

(2) Straightness. Provide methods that will ensure the joint does not deviate from a straight line by more than ½-inch (12.5 mm).

D. Method of Measurement and Basis of Payment. Pre-compressed expansion joints are measured and paid for by the linear foot along the centerline of the joint, parallel to the plane of the finished joint surface.

Payment at the contract unit price is full compensation for all resources necessary to complete the item of work in accordance with the contract.

37. IMPACT ATTENUATOR [606] (REVISED 9-11-14)

Install a Test Level 3, 24-inch (610 mm) wide impact attenuator at the location shown in the plans. The device must be rated for 60 mph (100 kph) and conform to the detail drawings.

Obtain complete detailed drawings and material costs for construction and bidding purposes from the manufacturer. Install the impact attenuator in accordance with manufacturer's specifications. Use Class General concrete, following the requirements of Subsection 551.03.2, for the required concrete pad.

Ensure existing concrete pad meets manufacturer's specifications if replacing existing impact attenuator.

Do not remove the existing guardrail until the impact attenuator is at the project site, and has been inspected and approved for use by the Project Manager.

Measurement and payment will be at the contract unit price per each, which includes all materials, labor and equipment to install complete in place.

38. IMPACT ATTENUATOR – TEMPORARY [606] (REVISED 1-21-21)

A. Description. This work is furnishing, installation, maintenance, and removal of temporary impact attenuator and crash cushion devices when construction activities expose blunt ends, ends of barriers, fixed objects, or other obstacles within the clear zone.

B. Materials. Furnish devices, including required transition sections that meet MASH crash test requirements. Devices meeting NCHRP 350 requirements are acceptable if manufactured before January 1, 2020.

C. Construction Requirements. Submit the manufacturer's installation instructions and proof of crash test compliance 14 calendar days prior to any work that will require the installation of devices.

Install devices at the locations shown of blunt or exposed ends of barriers or fixed objects in accordance with the manufacturer's installation instructions. The device must be installed within 12 hours from the time the obstacle is exposed.

Maintain at least one complete set of repair parts on the project at all times to repair or replace attenuators, which may be damaged during construction.

Attach the impact attenuator to the concrete barrier rail or other fixed objects using the manufacturer's approved transition section. Follow all manufacturers' instructions and guidance during the installation. Furnish and install all transitions, mounting hardware, and other necessary items.

Repair or replace damaged attenuators within 12 hours.

Remove the device within 48 hours of when the obstacle no longer exists. The devices remain the property of the Contractor after completion of the project.

D. Method of Measurement.

1) Temporary impact attenuators are measured for each complete installation shown on the plans. This includes furnishing, installing and the removal of one attenuator, one time.

2) Reset Temporary Impact Attenuator is measured by each and includes the complete reinstallation and removal of a temporary attenuator that was previously installed on the project and was moved to a new location.

Temporary removal/resetting of an attenuator to protect the same obstacle will not be measured for payment.

Removal, replacement, and repair of installations shown on the plans damaged by traffic will be paid in accordance with subsection 109.04. Installations and not shown on plans or the repair or replacement of temporary impact attenuators damaged by the Contractor will not be measured for payment.

E. Basis of Payment. Payment for the completed and accepted quantities is made under the following:

Pay Item	Pay Unit
Temp Impact Attenuator	Each
Reset Impact Attenuator – Temporary	Each

Payment at the contract unit price is full compensation for all resources necessary to complete the item of work under the contract.

39. TRAFFIC ACTUATED TEMPORARY SIGNALS [618] (REVISED 12-7-17)

A. General. Furnish computer controlled, traffic actuated temporary signals that utilize motion detection and video to optimize traffic operations during construction. Utilize multiple signals as necessary that work as a system to control traffic. It may include an operator that watches the live video streaming from the signal to determine signal phasing and adjusts timing to respond to variations in traffic. Optimize signal timing at each location.

B. Maintenance of Traffic. Two signals will be required to facilitate alternating one-way traffic during each phase of construction..

If the use of temporary signals is proposed or becomes necessary at other intersections throughout the project, utilize signals meeting the requirements of this provision.

C. Method of Measurement. Traffic actuated temporary signals will be measured per each individual signal per day. Other traffic control devices are measured in accordance with Subsection 618.04.1.

D. Basis of Payment. Traffic actuated temporary signals and will be paid under the bid item of traffic actuated temporary signals for each day per each individual signal used. Any pilot car(s) and/or flagger(s) used in conjunction with the traffic actuated temporary signals will not be paid for separately and will be included in the cost of the traffic actuated temporary signals item. Payment for other traffic control devices will be made in accordance with Subsection 618.05.

Payment at the contract unit price is full compensation for all necessary resources to complete the item of work under the contract.

40. TEMPORARY BARRIER RAIL [618] (REVISED 12-7-17)

A. Description. This work includes furnishing, installing, maintaining, and removing temporary barrier rail used for lane separation or protection of construction work zones from traffic.

B. Materials. Furnish concrete barrier rail in accordance with Section 605 and the Detailed Drawings. Alternative barrier design meeting NCHRP 350 TL-3 or MASH TL-3 crash testing may be used. Submit proof of crash testing compliance 14 calendar days prior to installation.

C. Construction Requirements. Furnish, install, maintain, and remove temporary barrier as required by the contract or manufacturer's instructions. Terminate the ends of temporary concrete barrier with a temporary impact attenuator or with approved blunt end protection as stated in the contract. Blunt end protection not shown on the plans is at Contractor expense.

D. Method of Measurement. Temporary barrier rail will be measured by the foot (m) of barrier placed to protect or channelize traffic as specified in the plans. Transition pieces and terminal ends will be measured for payment. Installation or resetting of barrier rail; required by the Contractor's operations and not shown on plans or the repair or replacement of temporary barrier rail damaged by the Contractor will not be measured for payment. Removal and replacement of installations damaged by traffic will be measured for payment.

E. Basis of Payment. Payment for the completed and accepted quantities is made under the following:

PAY ITEM	PAY UNIT
Temp Barrier Rail	Foot (m)
Reset Temp Barrier Rail	Foot (m)

Payment at the contract unit price is full compensation for all resources necessary to complete the item of work under the contract.

41. TRAFFIC CONTROL DEVICES – PLASTIC DRUMS [618] (REVISED 1-23-20)

Beginning on April 1, 2021, all plastic drums furnished and installed on Interstate projects must include 6-inch retro-reflective white and retro-reflective fluorescent orange sheeting.

Beginning on April 1, 2022, all plastic drums furnished and installed on all projects must include 6-inch retro-reflective white and retro-reflective fluorescent orange sheeting. All other requirements of Detailed Drawing 618-00 still apply.

42. SMART WORKZONE WALKBACK FLAGGER REPLACEMENT OPTION (END OF QUEUE DETECTION AND WARNING) [618] (ADDED 8-13-20)

A. Description. Furnish a smart work zone system capable of detecting and protecting the end of queue in lieu of a walk back flagger.

B. General.

1) End of Queue Detection and Warning. Furnish, install, maintain, adjust, and remove smart work zone technology to replace the walk back flagger. Install this system at flagging or signal control operations where a minimum of 10 vehicles are stopped at the location for more than 50% of the time or when sight distance to the signal or flagger is impaired.

a) Install radar sensors at the following signs: W3-3, R2-1, and W3-5.

b) Install a variable message board capable of displaying messages based on the input from the sensors 1500 feet from the estimated max queue location.

c) Adjust the radar sensors and message boards accordingly to protect the end of the queue.

d) Provide an online dashboard capable of showing the systems function and health in real time; including but not limited to:

(1) traffic speed at the individual sensors.
(2) battery life.
(3) system connectivity; and
(4) message displayed on the variable message board.

Average Speed at R2-1	VMS Phase 1	VMS Phase 2
> 35 MPH or when system is not in use.	Flashing Caution (4 corners)	
34 MPH to 30 MPH	Signal (or Flagger) Ahead	
29 MPH to 20 MPH	Slow Traffic Ahead	Prepare to Stop
< 20 MPH	Stopped Traffic Ahead	Prepare to Stop
Traffic Stopped at any Sensor	Stopped Traffic Ahead	Prepare to Stop
Fail Safe Mode	Signal (or Flagger) Ahead	Flashing Caution (4 corners)

Provide a failsafe system if communications go down or a fault is detected in the system for more than 2 minutes. Provide a system that will revert to a failsafe mode in which the message board will read “Signal or Flagger Ahead”

Sensor and message board locations must be included in the traffic control plan and approved by the Project Manager

Insert Network extender language if installing in areas of no cell coverage.

Provide speed data from sensors at the request of the Department.

2) Portable variable message signs. Furnish portable variable message signs that can execute the requirements set forth above. Furnish VMS that meet MUTCD requirements

3) Non-intrusive sensors. Furnish sensors that are portable, non-intrusive, capable of recording speed, detect traffic over multiple lanes, detect stopped traffic, and maintain performance in all weather conditions.

If a safe and visible installation location cannot be found, construct a pad that provides a safe, level location to install the message board adjacent to traffic.

C. Method of Measurement. Smart Work Zone Systems is measured by each system per day. One system is defined as one message board and 3 sensors.

D. Basis of Payment. Smart Work Zone Systems will be paid by each system at a rate of 500 units per day.

This item will be paid under group 37 of traffic control rate schedule.

43. SIGNING REQUIREMENTS

A. Description. This work is installing and replacing signs not shown in plan details but required for the project.

B. Materials. Furnish materials meeting the requirements of Section 619 and 704, and the Detailed Drawings.

C. Construction.

1) Station 563+73 LT. Replace the sign face only of the following:

a) W11-3; 30” x 30”; ‘Deer X-ing’ and

b) W7-3a; 24” x 18”; ‘Next 4 Miles’ signs.

c) Remove sign

2) Station 537+51 LT. Replace stop sign with new 30” x 30” stop sign (Type XI sheeting). Mount on 4” diameter pole behind the guardrail.

a) Remove sign

3) Replace delineation:

a) Type “A” mounted back to back. Replace 3 behind the guardrail.

b) Type “D” mounted back to back. Replace 1 behind the guardrail. Replace one not behind the guardrail.

D. Method of Measurement. Measurement of quantities are in accordance with Subsection 619.04.

E. Basis of Payment. Payment for the completed and accepted work is made under the following:

Item	Quantity	Total
Alum Refl Sheet XI	13 ft^2	13 ft^2
4” Dia Pole	1	14 ft
Delineator Type “D”	2	2
Delineator Type “A”	3	3
Steel U Post (2lbs) 7-Foot	5	70 lbs
Remove Signs	2	2

END OF SECTION I

MDT NONDISCRIMINATION
AND
DISABILITY ACCOMMODATION NOTICE

Montana Department of Transportation ("MDT") is committed to conducting all of its business in an environment free from discrimination, harassment, and retaliation. In accordance with State and Federal law MDT prohibits any and all discrimination and protections are all inclusive (hereafter "protected classes") by its employees or anyone with whom MDT does business:

Federal protected classes	State protected classes
Race, color, national origin, sex, sexual orientation, gender identity, age, disability, & Limited English Proficiency	Race, color, national origin, parental/marital status, pregnancy, childbirth, or medical conditions related to pregnancy or childbirth, religion/ creed, social origin or condition, genetic information, sex, sexual orientation, gender identification or expression, national origin, ancestry, age, disability mental or physical, political or religious affiliations or ideas, military service or veteran status

For the duration of this contract/agreement, the PARTY agrees as follows:

(1) Compliance with Regulations: The PARTY (hereinafter includes consultant) will comply with all Acts and Regulations of the United States and the State of Montana relative to Non-Discrimination in Federally and State-assisted programs of the U.S. Department of Transportation and the State of Montana, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

(2) Non-discrimination:

a. The PARTY, with regard to the work performed by it during the contract, will not discriminate, directly or indirectly, on the grounds of any of the protected classes in the selection and retention of subcontractors, including procurements of materials and leases of equipment, employment, and all other activities being performed under this contract/agreement.
b. PARTY will provide notice to its employees and the members of the public that it serves that will include the following:
    i. Statement that PARTY does not discriminate on the grounds of any protected classes.
    ii. Statement that PARTY will provide employees and members of the public that it serves with reasonable accommodations for any known disability, upon request, pursuant to the Americans with Disabilities Act as Amended (ADA).
    iii. Contact information for PARTY's representative tasked with handling non-discrimination complaints and providing reasonable accommodations under the ADA.

iv. Information on how to request information in alternative accessible formats.

c. In accordance with Mont. Code Ann. § 49-3-207, PARTY will include a provision, in all of its hiring/subcontracting notices, that all hiring/subcontracting will be on the basis of merit and qualifications and that PARTY does not discriminate on the grounds of any protected class.

(3) Participation by Disadvantaged Business Enterprises (DBEs):

a. If the PARTY receives federal financial assistance as part of this contract/agreement, the PARTY will make all reasonable efforts to utilize DBE firms certified by MDT for its subcontracting services. The list of all currently certified DBE firms is located on the MDT website at mdt.mt.gov/business/contracting/civil/dbe.shtml

b. By signing this agreement, the PARTY assures that:

The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

c. PARTY must include the above assurance in each contract/agreement the PARTY enters.

(4) Solicitation for Subcontracts, Including Procurement of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation, made by the PARTY for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the PARTY of the PARTY's obligation under this contract/agreement and all Acts and Regulations of the United States and the State of Montana related to Non-Discrimination.

(5) Information and Reports: The PARTY will provide all information and reports required by the Acts, Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information and its facilities as may be determined by MDT or relevant US DOT Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the PARTY will so certify to MDT or relevant US DOT Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

(6) Sanctions for Noncompliance: In the event of a PARTY's noncompliance with the Non- discrimination provisions of this contract/agreement, MDT will impose such sanctions as it or the relevant US DOT Administration may determine to be appropriate, including, but not limited to:

a. Withholding payments to the PARTY under the contract/agreement until the PARTY complies; and/or

b. Cancelling, terminating, or suspending the contract/agreement, in whole or in part.

(7) Pertinent Non-Discrimination Authorities:

During the performance of this contract/agreement, the PARTY, for itself, its assignees, and successor in interest, agrees to comply with the following non-discrimination statues and authorities; including but not limited to:

Federal

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21;
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airways Improvement Act of 1982, (49 U.S.C. § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (broadened the scope, coverage, and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975, and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients, and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibits discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 CFR parts 37 and 38;
- The Federal Aviation Administration's Non-Discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which prevents discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;

- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English Proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);

- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. § 1681 *et seq.*).

- Executive Order 13672 prohibits discrimination in the civilian federal workforce on the basis of gender identity and in hiring by federal contractors on the basis of both sexual orientation and gender identity.

State

- Mont. Code Ann. § 49-3-205 Governmental services;

- Mont. Code Ann. § 49-3-206 Distribution of governmental funds;

- Mont. Code Ann. § 49-3-207 Nondiscrimination provision in all public contracts.

(8) Incorporation of Provisions: The PARTY will include the provisions of paragraph one through seven in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and/or directives issued pursuant thereto. The PARTY will take action with respect to any subcontract or procurement as MDT or the relevant US DOT Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the PARTY becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the PARTY may request MDT to enter into any litigation to protect the interests of MDT. In addition, the PARTY may request the United States to enter into the litigation to protect the interests of the United States.

STANDARD PROVISIONS INDEX

FEDERAL AID PROJECTS CONTAINS

Federal Wage Rates (Rev. 1-3-2020)..... 9 Pages

Requirements & Acknowledgement for Working on Railroad R/W ..... 1 Page

Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Rev.5-1-2012]..... 12 Pages

Supplemental Revisions for Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Added 2-4-2016] ..... 1 Page

EEO Affirmative Action Req. on Federal-Aid Construction ..... 1 Page

General Decision Number: MT20200079 01/03/2020

MT79 Superseded General Decision Number:

MT20190079 State: Montana

Construction Type: Highway

Counties: Montana Statewide.

HIGHWAY CONSTRUCTION PROJECTS

Note: Under Executive Order (EO) 13658, an hourly minimum wage of $10.80 for calendar year 2020 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least $10.80 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2020. If this contract is covered by the EO and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must pay workers in that classification at least the wage rate determined through the conformance process set forth in 29 CFR 5.5(a)(1)(ii) (or the EO minimum wage rate, if it is higher than the conformed wage rate). The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60). Additional information on contractor requirements and worker protections under the EO is available at ww.dol.gov/whd/govcontracts.

Modification Number	Publication Date
0	01/03/2020

* SUMT2014-001 02/19/2014

	Rates	Fringes
CARPENTER		
Carpenter/Piledriverman....	$ 29.00	11.82
Millwright.....	$ 32.00	11.82

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Carpenter zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

CEMENT MASON/CONCRETE FINISHER...$ 24.87 10.80

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base + $2.50
Zone 3: Over 50 miles -Base + $3.00

The Cement Mason/Concrete Finisher zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

DIVER

Diver Tender.....$ 37.16 14.52
Diving.....$ 76.32 14.52
Stand-By.....$ 38.16 14.52

The tender shall receive 2 hours at the straight time pay rate per shift for dressing and/or undressing a Diver when work is done under hyperbaric conditions.

Depth Pay (Surface Diving):

0-20 ft.: Free zone
>20-100 ft.: $2.00 per ft.
>100-150 ft.: $3.00 per ft.
>150-220 ft.: $4 00 per ft.
>220 ft.: $5.00 per ft.

Diving in Enclosures (Diver Only):
0-25 ft.: Free zone
>25-300 ft.: $1.00 per ft.

DIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN (LINE CONSTRUCTION)

Equipment Operator.....$ 33.27 14.16
Groundman.....$ 25.98 13.25
Lineman.....$ 43.43 15.38

TRAVEL PAY:

$50.00 per day - 0-25 Miles from the County Courthouse of the following cities: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell and Missoula

$60.00 per day - Over 25 Miles

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN

All Areas.....$ 32.74 13.42

TRAVEL PAY:

Zone 1: 0 to 10 miles – Free
Zone 2: 10 to 60 miles - Federal mileage both ways/day
Zone 3: Over 60 miles - $75.00 per day

The Electrician zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

IRONWORKER.....$ 27.25 20.98

TRAVEL PAY:

0 to 45 miles - Free
45-85 miles - $55.00 per day
Over 85 miles - $85.00 per day

The Ironworker zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base + $2.50
Zone 3: Over 50 miles - Base + $3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

LABORER

Group 1.....$ 20.90 9.60
Group 2.....$ 23.97 9.60
Group 3.....$ 24.19 9.60
Group 4.....$ 25.18 9.60

GROUP 1: Flag Person
GROUP 2: All General Labor work; Burning Bar; Bucket Man; Carpenter Tender; Caisson Worker; Cement Mason Tender; Cement Handler (dry); Chuck Tender; Choker Setter; Concrete Worker; Curb Machine-Lay Down; Crusher and Batch Plant Worker; Fence Erector; Form Setter; Form Stripper; Heater Tender; Landscaper; Pipe Wrapper; Pot Tender; Powderman Tender; Rail and Truck Loaders and Unloaders; Rip rapper; Sealants for Concrete and other materials; Sign Erection, Guard Rail and Jersey Rail; Stake Jumper; Spike Driver; Signalman; Tail Hose man; Tool Checker and Houseman; Traffic Control Worker

GROUP 3: Concrete Vibrator; Dumpman (Grademan); Equipment Handler; Geotextile and Liners; High-Pressure Nozzleman; Jackhammer (Pavement Breaker); Laser Equipment; Non-riding Rollers; Pipelayer; Posthole Digger (power); Power Driven Wheelbarrow; Rigger; Sandblaster; Sod- Cutter-power; Tampers

GROUP 4: Asphalt Raker; Cutting Torch; Grade Setter; High-Scaler; Power Saws (Faller & Concrete); Powderman ($1.00 per hour above Group 4 rate); Rock & Core Drill; Track or Truck Mounted Wagon Drill; Welder including Air Arc

LABORERS ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

PAINTER (Pavement Marking/Milling and related work. Includes operating marking and all other equipment and all work involved in application of pavement markings including epoxies, paints, tape, buttons, thermo-plastics and any other products applied for traffic marking purposes and for directing and regulating traffic and cutting rumble strips) .....$ 28.00 10.30

PAINTER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

POWER EQUIPMENT OPERATOR:

Group 1.....	$ 26.52	10.40
Group 2.....	$ 28.55	10.40
Group 3.....	$ 29.41	10.40
Group 4.....	$ 30.10	10.40
Group 5.....	$ 31.44	10.40
Group 6.....	$ 32.13	10.40
Group 7.....	$ 34.23	10.40

GROUP 1: Air Compressor; Auto Fine Graders; Belt Finishing Machine; Boring Machine (small); Cement Silo; Crane, A-Frame Truck Crane; Crusher Conveyor; DW-10, 15, and 20 Tractor Roller; Farm Tractor; Forklift; Form Grader; Front End Loader Under 1 CU Yard; Heavy Duty Drills; Herman Nelson Heater; Mulching Machine; Oiler, All Except Cranes & Shovels; Pump man

GROUP 2: Air Doctor; Backhoe/Excavator/Shovel to and including 3 CU Yard; Bit Grinder; Bituminous Paving Travel Plant; Boring Machine Large; Broom, Self-Propelled; Concrete Travel Batcher; Concrete Float & Spreader; Concrete Bucket Dispatcher; Concrete Finish Machine; Concrete Conveyor; Distributor; Dozer; Rubber-Tired, Push & Side Boom; Elevating Grader/Gradall; Field Equipment Serviceman; Front End Loader 1 CU Yard to including 5 CU Yard; Grade Setter; Heavy Duty Drills, All Types; Hoist/Tugger, All; Hydralift & Similar; Industrial Locomotive; Motor Patrol, Except Finish; Mountain Skidder; Oiler - Cranes & Shovels; Pavement Breaker, EMSCO; Power Saw, Self-Propelled; Pugmill; Pumpcrete/Grout Machine; Punch Truck; Roller, Other Than Asphalt; Roller, Sheepsfoot, Self-Propelled; Roller, 25 Tons and Over; Ross Carrier; Rotomill Under 6 Ft; Trenching Machine; Washing/Screening Plant

GROUP 3: Asphalt Paving Machine; Asphalt Screed; Backhoe/Excavator/Shovel Over 3 CU Yard; Cableway Highline; Concrete Batch Plant; Concrete Curing Machine; Concrete Pump; Cranes; Creter; Cranes, Electric Overhead; Cranes 24 Tons and Under; Curb Machine/Slip Form Paver; Finish Dozer; Front End Loader Over 5 CU Yard; Mechanic/Welder; Pioneer Dozer; Roller Asphalt (Breakdown & Finish); Rotomill, Over 6 FT; Scraper, Single, Twin or Pulling Belly Dump; Yo-Yo Cat

GROUP 4: Asphalt/Hot Plant Operator, Cranes, 25 Tons to 44 Tons; Crusher Operator; Finish Motor Patrol; Finish Scraper

GROUP 5: Cranes, 45 Tons to Including 74 Tons

GROUP 6: Cranes, 75 Tons to Including 149 Tons; Crane, Whirley (All)

GROUP 7: Cranes, 150 Tons to Including 250 Tons (Add $ 1.00 for Every 100 Tons Over 250 Tons; Crane, Tower (All)

POWER EQUIPMENT OPERATOR ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

TRUCK DRIVER

Group 1.....$ 22.39 10.16
Group 2.....$ 28.06 10.16

GROUP 1: Pilot Car

GROUP 2: Combination Truck and Concrete Mixer and Transit Mixer; Dry Batch Trucks; Distributor Driver; Dumpman; Dump Trucks and Similar Equipment; Dumpster; Flat Trucks; Lumber Carriers; Lowboys; Pickup; Powder Truck Driver; Power Boom; Serviceman; Service Truck/Fuel Truck/ Tireperson; Truck Mechanic; Trucks with Power Equipment; Warehouseman, Partsman, Cardex and Warehouse Expeditor; Water Trucks

TRUCK DRIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula

Zone 1: 0 To 25 Miles - Free
Zone 2: 25 To 50 Miles - Base Pay +$2.50
Zone 3: Over 50 Miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

---

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive

care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier. A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can

be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed. With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations.

Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7).

Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board).

Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.

Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

Effective 09-17-20

"CONTRACTOR REQUIREMENTS AND ACKNOWLEDGMENT FOR WORKING ON RAILROAD RIGHT-OF-WAY"

This document must be dated and signed by the Contractor and submitted to the State before occupying or working on Railroad right-of-way.

1) No change, which has a direct effect on the Railroad, will be made to construction plans without submitting revised plans and receiving approval from the Railroad. Work covered by the plans, that requires flagging, will be covered by the Railroad/Highway Agreement. For work that is a result of the contractor's discretion, flagging protection will be required when equipment crosses or is working within 25 feet (7.62 meters) of center of any live track. When deemed necessary by local Railroad officers, a flagman may be required at all times while working on Railroad right-of-way in high density rail traffic area.

2) Crossing of any Railroad tracks must be done at approved locations and must be full depth timber, rubber, etc. Any equipment with steel wheels, lugs or tracks must not cross steel rails without the use of rubber tires or other approved protection. This shall apply specifically to, but not be limited to, access for Contractor furnished gravel, borrow or waste sites. The Contractor will be required to obtain a permit from the Railroad, and comply with any provisions thereof, before using any private Railroad crossings. All track crossing locations must be covered by a Private Roadway and Crossing Agreement. This does not apply to any public crossing.

3) Costs of flagging or planking protection of the tracks, which are a direct result of the planned construction, will be paid for by the State. Costs of flagging, planking for protection of the tracks, installation of new crossings or other work caused by the Contractor's discretion, will be paid by the Contractor.

4) When work to be performed by the Contractor is not covered in the Railroad/Highway agreement, the Contractor must furnish a plan to the Railroad for approval showing details as to how any work that may affect the Railroad will be accomplished.

5) Storing of construction materials or any other material, including dirt, sand, etc., within the Railroad right-of-way, will not be allowed unless covered by an easement, construction permit, or Contractor's permit/lease.

6) Construction within 25 feet (7.62 meters) of the center of any track not covered by the Railroad/Highway agreement will require plan approval and authorization by the Railroad Superintendent Maintenance and Engineering. This includes, but is not limited to, any excavation, slope work and driving of sheet piling.

7) No vehicles, equipment or machines shall be parked or stored unattended within 25 feet (7.62 meters) of any track, on railroad right-of-way, without specific written approval of the Railroad.

8) When any work is to be performed on Railroad property by the Contractor that is not shown in the construction plans, the Contractor must submit a detailed plan of the work to the Railroad for their approval.

CONTRACTOR'S ACKNOWLEDGMENT:

_____
Company

By: _____
Name

_____
Title

_____
Date

WORK SITE LOCATION:

_____
Town

_____
State

_____
Project #

Rev. 01/01/04

FHWA-1273 -- Revised May 1, 2012

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Nonsegregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Compliance with Governmentwide Suspension and Debarment Requirements
XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 “Contract provisions and related matters” with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH–1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b.(1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of $10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
(2) the prime contractor remains responsible for the quality of the work of the leased employees;
(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1**. Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. “First Tier Covered Transactions” refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. “First Tier Covered Transactions” refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

Supplemental Revisions for FHWA Form-1273 (Dated May 1, 2012)
Required Contract Provisions
Federal-Aid Construction Contracts

The following are supplementary or amendatory to the May 1, 2012, FHWA Form-1273 insofar as they apply to this contract:

Add the following provisions in accordance with the FHWA memo dated December 11, 2015:

Utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.

Furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in above paragraph to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

SPECIAL PROVISIONS
Rev. 3-15-02
EEO AFFIRMATIVE ACTION REQUIREMENTS ON
FEDERAL & FEDERAL-AID CONSTRUCTION CONTRACTS

Federal-aid contractors are hereby notified they are subject to the OFCCP goals and timetables for minority and female participation expressed below. Compliance with the goals and OFCCP affirmative action efforts for contracts and subcontracts consisting of $10,000 or more will be determined by OFCCP officials.

APPENDIX A

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246)

1. The Offeror's or Bidder's attention is called to the Equal Opportunity Clause and "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

GOALS FOR FEMALE PARTICIPATION EACH TRADE	6.9%
TIMETABLES	GOALS FOR MINORITY PARTICIPATION IN EACH TRADE
153 Great Falls, MT	
SMSA (Standard Metropolitan Statistical Area) Counties	
3040 Great Falls, MT	3.2%
Cascade County	
Non-SMSA Counties	4.1%
Blaine, Broadwater, Chouteau, Fergus, Glacier, Hill, Jefferson, Judith Basin, Lewis & Clark, Liberty, Meagher, Petroleum, Phillips, Pondera, Teton, Toole, Valley, Wheatland	
154 Missoula, MT	
Non-SMSA Counties	2.7%
Beaverhead, Deer Lodge, Flathead, Granite, Lincoln, Madison, Mineral, Lake Missoula, Powell, Ravalli, Sanders, Silver Bow	
155 Billings, MT	
SMSA Counties	
0880 Billings, MT	3.3%
Yellowstone County	
Non-SMSA Counties	3.3%
Big Horn, Carbon, Carter, Custer, Dawson, Fallon, Gallatin, Garfield, Golden Valley, McCone, Musselshell, Park, Powder River, Prairie, Rosebud, Stillwater, Sweet Grass, Treasure, Wibaux, Yellowstone Nat'l Park	
Non-SMSA Counties	
Daniels, Sheridan, Richland, Roosevelt	4.4%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of $10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.