


STOP AHEAD PAVEMENT DETAIL
<=50mph

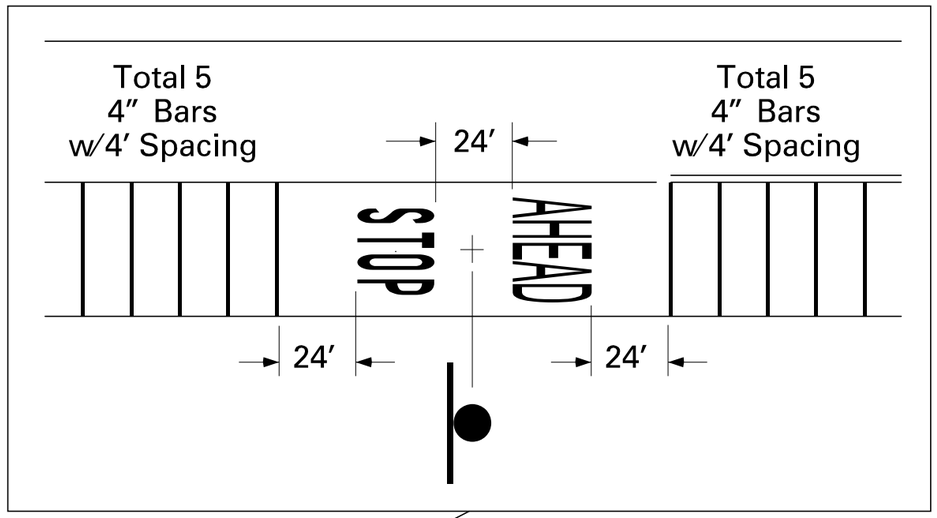



W3-1a
36"x36"

W4-4p
30"x15"



R1-1
48"x48"

W4-4p
30"x15"

Pavement Marking Quantities
1 Set of 2 Groups of 5 4" Bars
Paint: 0.41 gal.
Epoxy: 0.55 gal.