
AWARD COPY

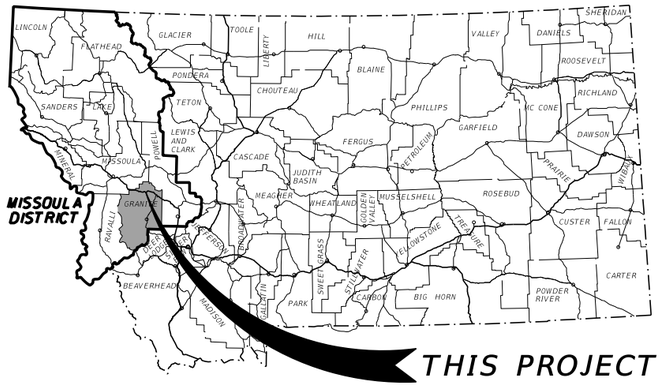


MONTANA DEPARTMENT OF TRANSPORTATION

FEDERAL AID PROJECT IM 90-3(152)147
EROSION REPAIR
I-90 EROSION - W OF DRUMMOND
GRANITE COUNTY
EROSION CONTROL PLANS

LENGTH 0.1 MILES

SURFACING SOURCES -
CONTRACTOR FURNISHED

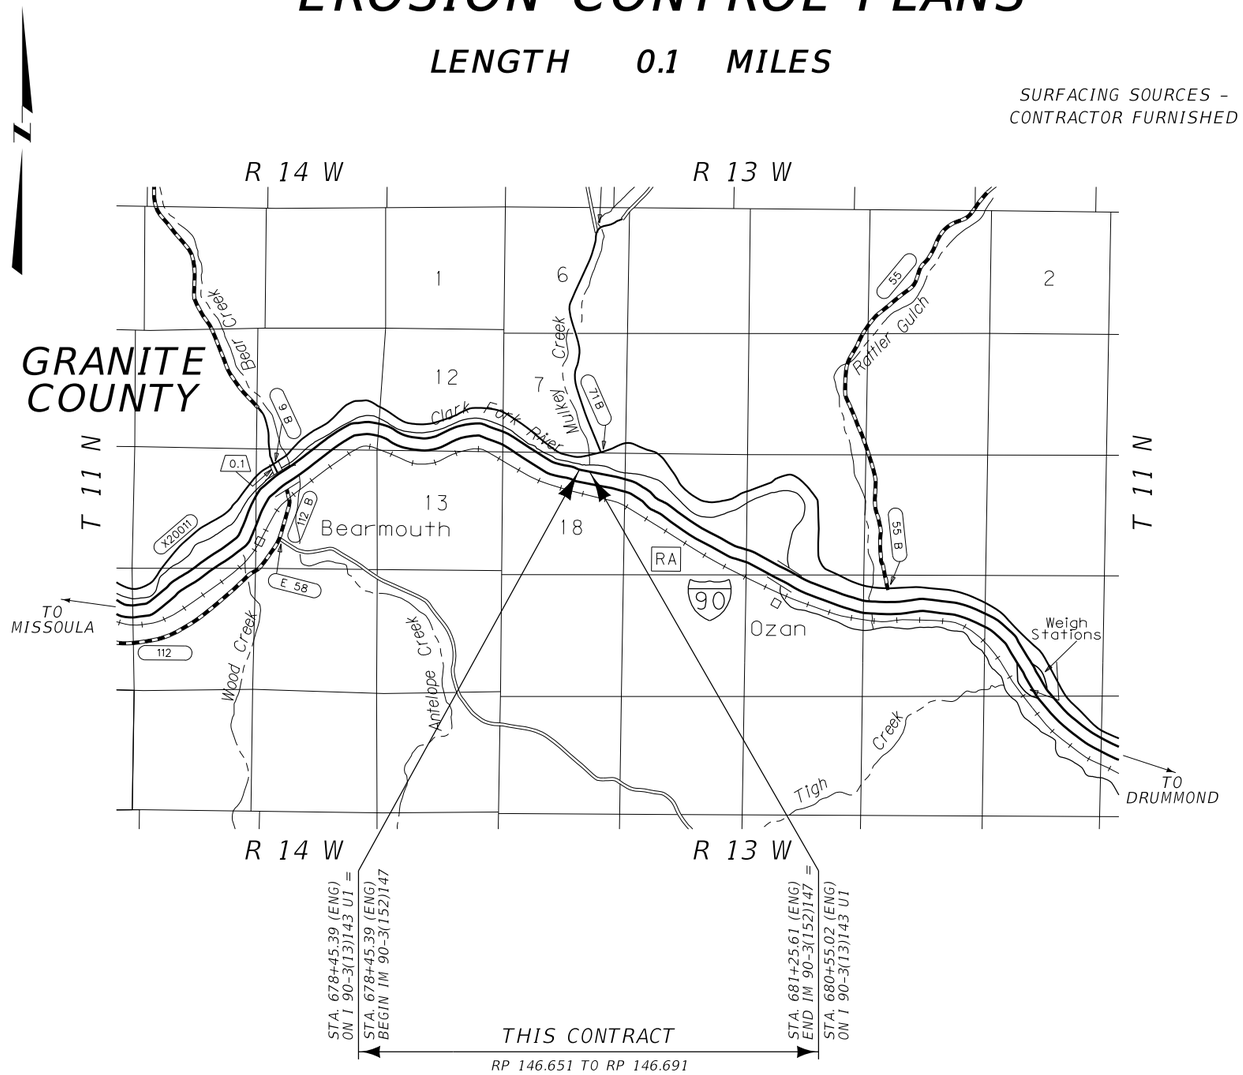

AWARD COPY

EROSION AND SEDIMENT CONTROL BMP'S

REFER TO THE MOST CURRENT RELEASE OF MDT'S EROSION & SEDIMENT CONTROL BMP MANUAL

PEV (SS-1) SHOULD BE IDENTIFIED AND USED THROUGHOUT THE ENTIRE PROJECT IN ALL AREAS NOT DISTURBED BY CONSTRUCTION

TS (SS-3) AND ES (SS-4) SHOULD BE UTILIZED THROUGHOUT THE ENTIRE PROJECT

GENERAL BMP'S

- I/O — INLET/OUTLET PROTECTION
- WP — WATERWAY PROTECTION
- WR — WATER RESOURCE PROTECTION

TEMPORARY SOIL STABILIZATION BMP'S (SS)

- PEV — PRESERVATION OF EXISTING VEGETATION (SS-1)
- MC — MULCH COVER (SS-2)
- TS — TEMPORARY SEEDING (SS-3)
- ES — EROSION SEEDING (SS-4)
- SB — SOIL BINDERS (SS-5)
- REC — ROLLED EROSION CONTROL PRODUCTS (SS-6)
- SR — SURFACE ROUGHENING (SS-7)
- WE — WIND EROSION CONTROL (SS-8)

RUN-ON AND RUNOFF CONTROL (RC)

- ED/LD — EARTH DIKES/DRAINAGE SWALES/LINED DITCHES (RC-1)
- OVDD — OUTLET VELOCITY DISSIPATION DEVICES (RC-2)
- TSD — TEMPORARY SLOPE DRAINS (RC-3)

TEMPORARY SEDIMENT CONTROL BMP'S (SC)

- SF — SILT FENCE (SC-1)
- DB — DESILTING BASIN (SC-2)
- ST — SEDIMENT TRAP (SC-3)
- CD — CHECK DAMS (SC-4)
- DDB — DUGOUT DITCH BASIN (SC-5)
- FR — FIBER ROLLS (SC-6)
- CS — COMPOST SOCKS (SC-7)
- BB — BRUSH BARRIER (SC-8)
- SAND-B — SANDBAG BARRIER (SC-9)
- GBB — GRAVEL BAG BERM (SC-10)
- RB — ROCK FILTER BERM (SC-11)
- I/O — INLET/OUTLET PROTECTION (SC-12)

TRACKING CONTROL BMP'S (TC)

- SCEE — STABILIZED CONSTRUCTION ENTRANCE/EXIT (SC-13)
- SCR — STABILIZED CONSTRUCTION ROADWAY (SC-14)
- EOTW — ENTRANCE/OUTLET TIRE WASH (SC-15)

THE FOLLOWING BMP ALTERNATIVES ARE NOT COMPREHENSIVE AND DO NOT SUPERSEDE MDT CONTRACT REQUIREMENTS OR MANDATES AND REQUIREMENTS SPECIFIED BY OTHER AUTHORIZED LOCAL, STATE, AND FEDERAL AGENCIES.

I/O — INLET/OUTLET PROTECTION

REC, CS, SAND-B, FR, RB, OVDD, ED/LD, GBB

WR — WATER RESOURCE PROTECTION

FR, PEV, TS, I/O, SF, GBB, SAND-B, TSD, REC, ES, OVDD, RB

DT — DITCH TREATMENT


TS, REC, GBB, CS, CD, SAND-B, DDB, OVDD, ED/LD, TSD

NOTE: BMP STATIONING IS APPROXIMATE

CONSTRUCTION LIMITS:
CUT SECTION
TOE OF FILL

3 / 1	MDT MONTANA DEPARTMENT OF TRANSPORTATION	C:\DGN\9917000rderttl.dgn 1/12/2021 7:42:31 AM CPS - U3162	EROSION CONTROL PLANS GRANITE COUNTY	I-90 EROSION - W OF DRUMMOND	IM 90-3(152)147 UPN 9917000 02

AWARD COPY

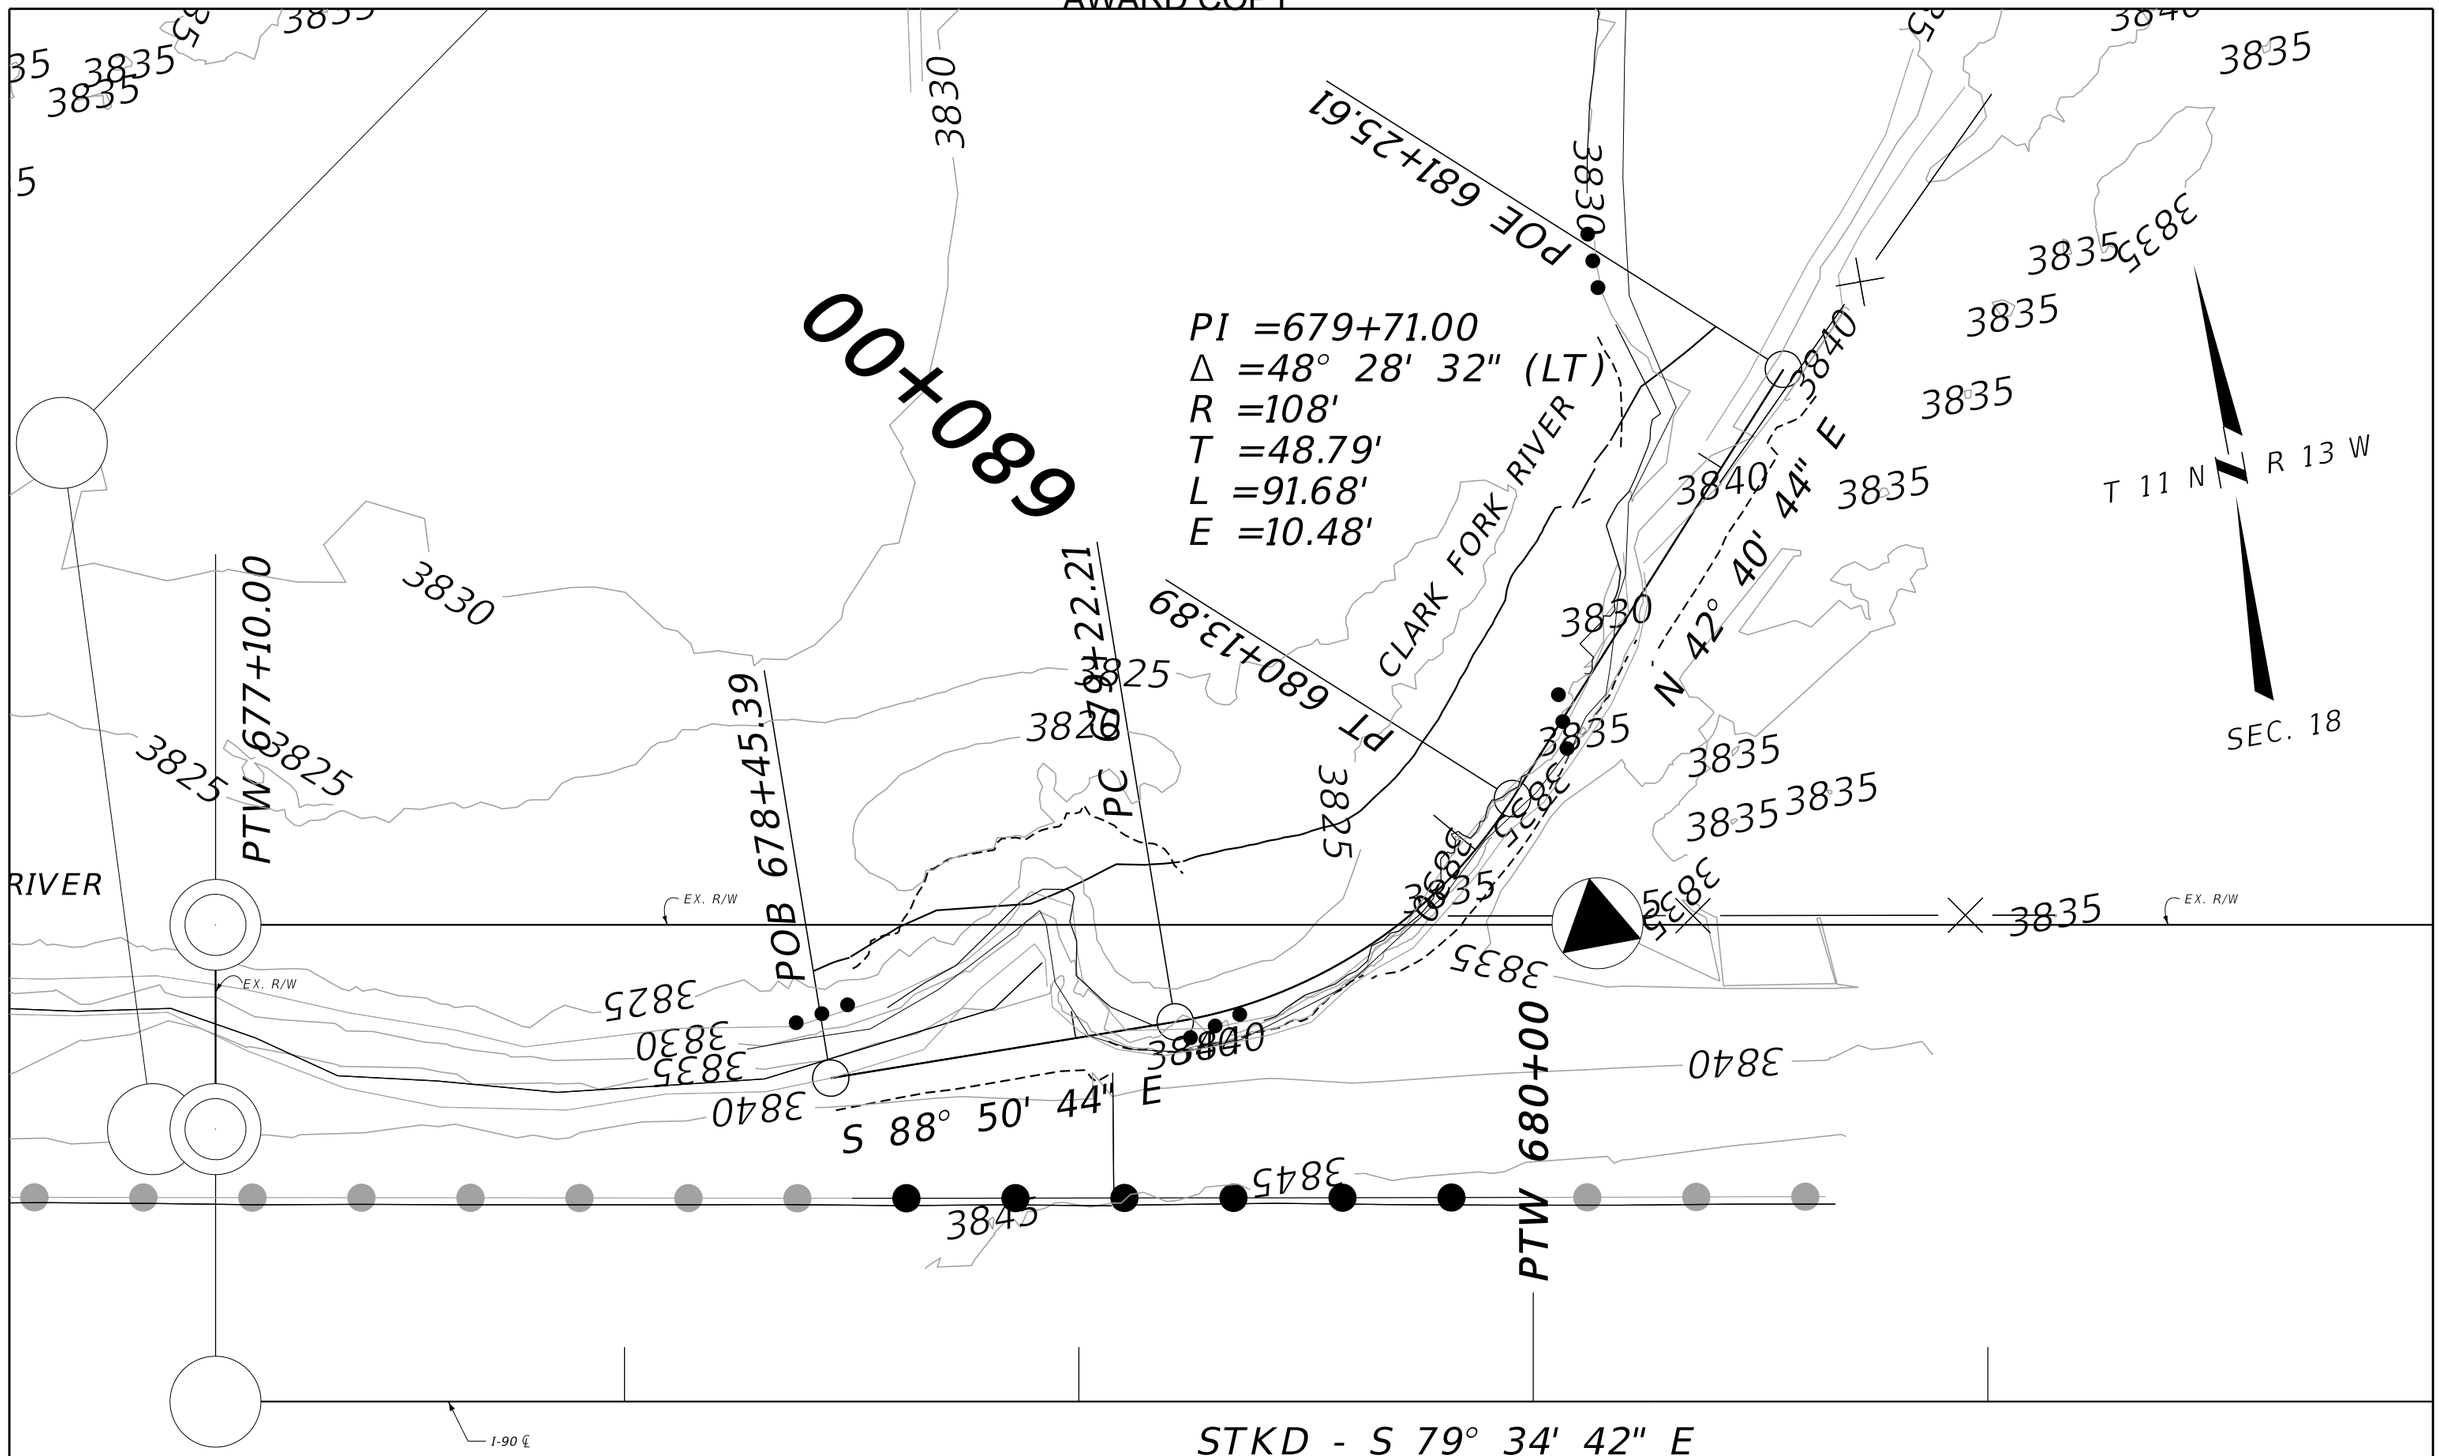

3	MDT	MONTANA DEPARTMENT OF TRANSPORTATION	C:\DGN\9917000rderopln.dgn	DESIGNED BY SUE CUSKER	11/09/2020	EROSION CONTROL PLANS	I-90 EROSION - W OF DRUMMOND
2			1/12/2021	REVIEWED BY BEN NUNNALLEE	12/05/2020	GRANITE COUNTY	IM 90-3(152)147
			7:42:40 AM CPS - U3162	CHECKED BY		PRELIMINARY FPR	UPN 9917000 03