STATE OF MONTANA
DEPARTMENT OF TRANSPORTATION
BID PACKAGE

Sealed bids for construction of this project will be received by the Montana Department of Transportation, Construction Contracting Bureau, Room 101, 2701 Prospect, Helena, Montana until 9:00 a.m. on March 10, 2022. All bids will then be publicly opened, reviewed for correctness, and then publicly read.

Federal Aid Project(s):

STPB 9044(31) Big Porcupine Cr – 14M E Ingomar

Bid proposals, Plans, Standard Specifications, Detail Drawings, and Standard Contract Forms are on file for examination and may be obtained from the Construction Contracting Bureau of the Montana Department of Transportation, 2701 Prospect Avenue, P.O. Box 201001, Helena, Montana 59620-1001.

Prime bidders use the Electronic Bid System or bid on-line through Bid Express to produce a bid containing Proposal Forms, Schedule of Items, and Disadvantaged Business Enterprises (DBE) Requirements (if applicable).

CONTRACT # 10222
AWARDED ON: MARCH 22, 2022
TO: TCA GROUP INC

MONTANA DEPARTMENT OF TRANSPORTATION

Loran Frazier, Chairperson
Montana Transportation Commission

Malcolm “Mack” Long
Director of Transportation

Contract No.10222
EM:HB:8876000AWD-101

CURRENT QUESTIONS & ANSWERS

101 - BIG PORCUPINE CR - 14 M E INGOMAR - March 10, 2022

Notifications
No Notices available for this project.

Addendums
No Addendums available for this project.

Clarifications
-1-
Submitted: Thursday 03-MAR-2022 01:55 PM
The Federal Wage Rates (dated 1-7-2022) located in Section III, are hereby rescinded and replaced with the new Federal Wage Rates dated 2-25-2022. **FEDERAL WAGE RATES** (see end of Q&A)
-2-
Submitted: Friday 04-MAR-2022 01:15 PM
Special Provision #22 - Clean Water Act Section 404 Permit and Section 401 Certification is hereby replaced with an updated version.
UPDATED CLEAN WATER ACT (see end of Q&A)

Questions
-1-
Submitted: Wednesday 23-FEB-2022 11:22 AM
Company: Sletten Construction Company
Contact: Russ Robertson
With the current materials supply issues in conjunction with the amount of time required to obtain permits, Sletten is requesting a flexible NTP to allow time for these items. Moreover, the flexibility could reduce risk associated with high water and muddy conditions due to spring rains.
Answer
Submitted: Tuesday 01-MAR-2022 08:25 AM
The notice proceed will be issued with an effective date of June 13, 2022. The contractor may change the notice to proceed to an earlier date if written notification is received at least ten calendar days in advance of the date selected and the selected date is approved by the Project Manager.
-2-
Submitted: Friday 25-FEB-2022 05:07 PM
Company: Northwest Linings & Geotextile Products
Contact: Ramone Jackson
Looking to confirm that the Coir Wattle's are paid under the two 'Seeding' bid items (0240 & 0250)
Answer
Submitted: Wednesday 02-MAR-2022 01:00 PM
Coir wattles are incidental to other embankment stabilization items.

CURRENT QUESTIONS & ANSWERS

-3-
Submitted: Friday 04-MAR-2022 03:37 PM
Company: Mountain West Holding Co
Contact: Chris Connors
Does the contract specify the method of payment for the wood curb shown in the plans?
Answer
Submitted: Tuesday 08-MAR-2022 10:22 AM
The 2x6 timber curb board installation is incidental to the turf reinforcement mat item.

General Decision Number: MT20220079 02/25/2022

Superseded General Decision Number: MT20210079

State: Montana

Construction Type: Highway

Counties: Montana Statewide.

HIGHWAY CONSTRUCTION PROJECTS

Note: Contracts subject to the Davis-Bacon Act are generally required to pay at least the applicable minimum wage rate required under Executive Order 14026 or Executive Order 13658. Please note that these Executive Orders apply to covered contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but do not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60).

If the contract is entered into on or after January 30, 2022, or the contract is renewed or extended (e.g., an option is exercised) on or after January 30, 2022:	. Executive Order 14026 generally applies to the contract. . The contractor must pay all covered workers at least $15.00 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in 2022.
If the contract was awarded on or between January 1, 2015 and January 29, 2022, and the contract is not renewed or extended on or after January 30, 2022:	. Executive Order 13658 generally applies to the contract. . The contractor must pay all covered workers at least $11.25 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on that contract in 2022.

The applicable Executive Order minimum wage rate will be adjusted annually. If this contract is covered by one of the Executive Orders and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must still submit a conformance request. Additional information on contractor requirements and worker protections under the Executive Orders is available at https://www.dol.gov/agencies/whd/government-contracts.

Modification Number Publication Date

0 01/07/2022

1 02/25/2022*

SUMT2014-001 02/19/2014

Rates Fringes

CARPENTER

Carpenter/Piledriverman.....$ 29.00 11.82

Millwright.....$ 32.00 11.82

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Carpenter zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

CEMENT MASON/CONCRETE FINISHER...$ 24.87 10.80

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Cement Mason/Concrete Finisher zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

DIVER

Diver Tender.....$ 37.16 14.52
Diving.....$ 76.32 14.52
Stand-By.....$ 38.16 14.52
The tender shall receive 2 hours at the straight time pay rate per shift for dressing and/or undressing a Diver when work is done under hyperbaric conditions.

Depth Pay (Surface Diving):

0-20 ft.: Free zone
>20-100 ft.: $2.00 per ft.
>100-150 ft.: $3.00 per ft.
>150-220 ft.: $4 00 per ft.
>220 ft.: $5.00 per ft.
Diving in Enclosures (Diver Only):

0-25 ft.: Free zone
>25-300 ft.: $1.00 per ft.

DIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN (LINE CONSTRUCTION)

Equipment Operator.....$ 33.27 14.16
Groundman.....$ 25.98 13.25
Lineman.....$ 43.43 15.38

TRAVEL PAY:

$50.00 per day - 0-25 Miles from the County Courthouse of the following cities: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, and Missoula.

$60.00 per day - Over 25 Miles

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN

All Areas.....$ 32.74 13.42

TRAVEL PAY:

Zone 1: 0 to 10 miles - Free
Zone 2: 10 to 60 miles - Federal mileage both ways/day
Zone 3: Over 60 miles - $75.00 per day

The Electrician zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

IRONWORKER.....$ 27.25 20.98

TRAVEL PAY:

0 to 45 miles - Free
45-85 miles - $55.00 per day
Over 85 miles - $85.00 per day

The Ironworker zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base + $2.50
Zone 3: Over 50 miles - Base + $3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

LABORER

Group 1.....$ 20.90 9.60
Group 2.....$ 23.97 9.60
Group 3.....$ 24.19 9.60
Group 4.....$ 25.18 9.60

GROUP 1: Flag Person

GROUP 2: All General Labor work; Burning Bar; Bucket Man; Carpenter Tender; Caisson Worker; Cement Mason Tender; Cement Handler (dry); Chuck Tender; Choker Setter; Concrete Worker; Curb Machine-Lay Down; Crusher and Batch Plant Worker; Fence Erector; Form Setter; Form Stripper; Heater Tender; Landscaper; Pipe Wrapper; Pot Tender; Powderman Tender; Rail and Truck Loaders and Unloaders; Riprapper; Sealants for Concrete and other materials; Sign Erection, Guard Rail and Jersey Rail; Stake Jumper; Spike Driver; Signalman; Tail Hose man; Tool Checker and Houseman; Traffic Control Worker.

GROUP 3: Concrete Vibrator; Dump man (Grade man); Equipment Handler; Geotextile and Liners; High-Pressure Nozzleman; Jackhammer (Pavement Breaker); Laser Equipment; Non-riding Rollers; Pipelayer; Posthole Digger (power); Power Driven Wheelbarrow; Rigger; Sandblaster; Sod-Cutter-power; Tampers

GROUP 4: Asphalt Raker; Cutting Torch; Grade Setter; High-Scaler; Power Saws (Faller & Concrete); Powderman ($1.00 per hour above Group 4 rate); Rock & Core Drill; Track or Truck Mounted Wagon Drill; Welder including Air Arc

LABORERS ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

PAINTER (Pavement Marking/Milling and related work. Includes operating marking and all other equipment and all work involved in application of pavement markings including epoxies, paints, tape, buttons, thermo-plastics, and any other products applied for traffic marking purposes and for directing and regulating traffic and cutting rumble strips) .....$ 28.00 10.30

PAINTER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

POWER EQUIPMENT OPERATOR:

Group 1.....$ 26.52 10.40
Group 2.....$ 28.55 10.40
Group 3.....$ 29.41 10.40
Group 4.....$ 30.10 10.40
Group 5.....$ 31.44 10.40
Group 6.....$ 32.13 10.40
Group 7.....$ 34.23 10.40

GROUP 1: Air Compressor; Auto Fine Graders; Belt Finishing Machine; Boring Machine (small); Cement Silo; Crane, A-Frame Truck Crane; Crusher Conveyor; DW-10, 15, and 20 Tractor Roller; Farm Tractor;

Forklift; Form Grader; Front End Loader Under 1 CU Yard; Heavy Duty Drills; Herman Nelson Heater; Mulching Machine; Oiler, All Except Cranes & Shovels; Pumpman.

GROUP 2: Air Doctor; Backhoe/Excavator/Shovel to and including 3 CU Yard; Bit Grinder; Bituminous Paving Travel Plant; Boring Machine Large; Broom, Self-Propelled; Concrete Travel Batcher; Concrete Float & Spreader; Concrete Bucket Dispatcher; Concrete Finish Machine; Concrete Conveyor; Distributor; Dozer; Rubber-Tired, Push & Side Boom; Elevating Grader/Gradall; Field Equipment Serviceman; Front End Loader 1 CU Yard to including 5 CU Yard; Grade Setter; Heavy Duty Drills, All Types; Hoist/Tugger, All; Hydralift & Similar; Industrial Locomotive; Motor Patrol, Except Finish; Mountain Skidder; Oiler - Cranes & Shovels; Pavement Breaker, EMSCO; Power Saw, Self-Propelled; Pugmill; Pumpcrete/Grout Machine; Punch Truck; Roller, Other Than Asphalt; Roller, Sheepsfoot, Self-Propelled; Roller, 25 Tons and Over; Ross Carrier; Rotomill Under 6 Ft; Trenching Machine; Washing/Screening Plant.

GROUP 3: Asphalt Paving Machine; Asphalt Screed; Backhoe/Excavator/Shovel Over 3 CU Yard; Cableway Highline; Concrete Batch Plant; Concrete Curing Machine; Concrete Pump; Cranes; Creter; Cranes, Electric Overhead; Cranes 24 Tons and Under; Curb Machine/Slip Form Paver; Finish Dozer; Front End Loader Over 5 CU Yard; Mechanic/Welder; Pioneer Dozer; Roller Asphalt (Breakdown & Finish); Rotomill Over 6 FT; Scraper, Single, Twin or Pulling Belly Dump; Yo-Yo Cat.

GROUP 4: Asphalt/Hot Plant Operator, Cranes, 25 Tons to 44 Tons; Crusher Operator; Finish Motor Patrol; Finish Scraper.

GROUP 5: Cranes, 45 Tons to Including 74 Tons.

GROUP 6: Cranes, 75 Tons to Including 149 Tons; Crane, Whirley (All).

GROUP 7: Cranes, 150 Tons to Including 250 Tons (Add $ 1.00 For Every 100 Tons Over 250 Tons; Crane, Tower (All).

POWER EQUIPMENT OPERATOR ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

TRUCK DRIVER

Group 1.....$ 22.39 10.16
Group 2.....$ 28.06 10.16

GROUP 1: Pilot Car

GROUP 2: Combination Truck and Concrete Mixer and Transit Mixer; Dry Batch Trucks; Distributor Driver; Dump man; Dump Trucks and Similar Equipment; Dumpster; Flat Trucks; Lumber Carriers; Lowboys; Pickup; Powder Truck Driver; Power Boom; Serviceman; Service Truck/Fuel Truck/ Tire person; Truck Mechanic; Trucks with Power Equipment; Warehouseman, Parts man, Cardex and Warehouse Expeditor; Water Trucks.

TRUCK DRIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles – Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury, or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of ""identifiers"" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers:

A four-letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than ""SU"" or ""UAVG"" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers:

Classifications listed under the ""SU"" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers:

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those

classifications: however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can

be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter

* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations.

Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7).

Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board).

Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

CLEAN WATER ACT SECTION 404 PERMIT AND SECTION 401 CERTIFICATION

A. Description. This provision describes the project work that has been authorized under Sections 404 and 401 of the Clean Water Act (CWA) and the associated conditions that must be adhered to for compliance with CWA requirements.

B. Section 404 CWA Nationwide Permit 23 Description. The permanent features of this project are authorized under a US Army Corps of Engineers Nationwide Permit 23 – Approved Categorical Exclusions, (Army Corps File Number NWO-2021-01239-MTB).

The permit for this project authorizes the following project work to be performed within waters of the US.

Bridge replacement at Big Porcupine Creek. (STA 08+52 to 10+13) Section 29, Township 10N, and Range 37E. Latitude 46.584721, Longitude -107.095641. The project involves the replacement of a structurally deficient bridge over Big Porcupine Creek with a new 31.3-feet by 50-feet bridge. As a result of construction activities, approximately 0.06 acres of wetlands and 101 linear feet (LF) of Big Porcupine Creek will be permanently impacted.

This authorization is valid until March 14, 2026

Obtain the Nationwide Permit 23 Fact Sheet that fully describes the Nationwide Permit 23 and lists the General Conditions that must be adhered to for this authorization to remain valid. Adhere to the General Conditions.

In addition to the General Conditions, adhere to the following Special Conditions provided by the US Army Corps in the Authorization:

Comply with all terms and conditions of the enclosed December 14, 2020, Section 401 of the Clean Water Act Water Quality Certification.

C. Section 404 CWA Nationwide Permit 33 Description. Obtain authorization for the temporary features of this project (e.g. work bridges, work pads, cofferdams, diversions, etc.) under US Army Corps of Engineers Nationwide Permit 33 – Temporary Construction, Access, and Dewatering.

Acquire an additional Section 404 Permit and 401 Certification authorization for temporary discharges that are:

Located within 100 feet of the water source in natural spring areas;

Within the boundaries of any Tribal Reservation or Tribal trust lands;

Within the following waterways and their impoundments: Kootenai River, Missouri River, Yellowstone River, Bitterroot River, Clark Fork River (tributary to the Columbia River), Flathead River, Flathead Lake, and Milk River; or,

Within Special River Management Zone of the Upper Yellowstone River.

Prepare and submit a joint application in accordance with Section 208.03.3. MDT is not responsible for delays caused by incomplete or inaccurate submittals by the Contractor.

For all other temporary discharges, submit a written description to the Project Manager detailing the temporary facilities planned for the project, along with the associated restoration plan. Allow 5 working days for the Project Manager to review the plan and confirm CWA 404 pre-construction notification is not required. For temporary discharges authorized under Nationwide Permit 33 without pre-construction notification, the authorization is valid until March 14, 2026.

Obtain the Nationwide Permit 33 Fact Sheet that fully describes the Nationwide Permit 33 and lists the General Conditions that must be adhered to for this authorization to remain valid. Adhere to the General Conditions.

D. CWA Section 404 Regional Conditions. Obtain the 2021 Nationwide Permits Regional Conditions, Omaha District, State of Montana, Effective February 25, 2022, that also apply to this project and must be adhered to for these authorizations to remain valid. Adhere to the Regional Conditions, including but not limited to the following:

Temporary fills in wetlands must be placed on a horizontal marker layer, such as fabric or certified weed-free straw, to delineate the pre-project ground elevation and facilitate complete fill removal and site restoration.

All erosion control blanket or fabric used in or adjacent to waters of the U.S. must be comprised of degradable material to ensure decomposition. Do not use material that includes stabilized netting or stabilized open mesh, as these products take a long time to degrade and they can trap small animals, birds, amphibians and fish. This prohibition also applies to mesh materials used for wattles, rolled materials, and bank wraps. Erosion control blanket or fabrics that break down within 24 months are acceptable. Non-degradable blankets or fabric may be allowed on a case-specific basis if it will be buried beneath riprap or structures and it is not likely to be exposed. Non-degradable blanket or fabric that becomes exposed within waters of the US must be removed.

E. CWA Section 401 Water Quality Certification is granted for Nationwide Permit 23 by the Montana Department of Environmental Quality (DEQ), provided that certain general and special conditions are met.

Obtain the water quality certification requirements issued by DEQ on December 14, 2020. Adhere to those general and special conditions.

Notification in accordance with General Condition E.1 has been fulfilled by MDT.

F. Copies of the 2021 Nationwide Permit Fact Sheets for Nationwide Permits 23 and 33, the 2021 Nationwide Permit Regional Conditions for the State of Montana, and DEQ's 401 Water Quality Certification Requirements for the 2021 Nationwide Permits are available upon request from Environmental Services or on the web at http://www.mdt.mt.gov/business/contracting/environmental/cwa.shtml .

Coordinate with the engineering project manager if you have questions regarding this authorization. Proposed changes to the permanent structures should be directed to the project manager for coordination with the District Project Development Engineer in the Environmental Services Bureau. Temporary facility permitting and/or general permit questions should be directed to the project manager for coordination with the District Environmental Engineering Specialist.

MONTANA DEPARTMENT OF TRANSPORTATION
SCHEDULE OF ITEMS

CONTRACT ID: 10222

PROJECT: STPB 9044(31) (8876031000)
BIG PORCUPINE CR - 14M E INGOMAR

PROP LINE NO.	ITEM NUMBER	ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY
	SECTION 0001 - BRIDGE REPLACEMENT			
0010	104 030 010	MISCELLANEOUS WORK	UNIT	20,000.00
0020	109 200 005	MOBILIZATION	LS	1.00
0030	202 020 041	REMOVE STRUCTURE	LS	1.00
0040	203 020 100	EXCAVATION-UNCLASSIFIED	CUYD	2,397.00
0050	203 080 100	TOPSOIL-SALVAGING AND PLACING	CUYD	267.00
0060	208 010 150	TEMPORARY EROSION CONTROL-LS	LS	1.00
0070	208 010 200	TEMPORARY EROSION CONTROL-FIXED	UNIT	500.00
0080	301 020 254	BRIDGE END BACKFILL-TYPE 3	CUYD	720.00
0090	301 020 526	TOP SURFACING GR 3B	CUYD	724.00
0100	301 020 625	AGGREGATE TREATMENT	SQYD	2,082.00
0110	551 020 035	CONCRETE-CLASS STRUCTURE	CUYD	277.20
0120	553 010 480	PRESTRESSED TRI DECK BEAMS	LNFT	250.00
0130	555 010 100	REINFORCING STEEL	LB	26,542.00
0140	557 010 013	BRIDGE RAIL-W830	LNFT	206.00
0150	559 010 202	RE-DRIVE TEST PILE	EACH	2.00
0160	559 040 035	DYNAMIC LOAD TEST	EACH	2.00
0170	559 050 117	FURN STEEL PILE-HP	LB	67,054.00
0180	559 060 115	DRIVE STEEL PILE	LNFT	525.80
0190	559 060 300	PILE DRIVING POINT	EACH	20.00
0200	603 013 490	PIPE-CORR POLYETHYLENE DR 4 IN	LNFT	62.00
0210	606 010 039	GUARDRAIL - MBEAT TERM SEC TL-3	EACH	4.00
0220	606 010 040	GUARDRAIL-STEEL BOX BEAM	LNFT	72.00
0230	606 010 266	GRD RL-BOX BEAM/BR APP-SEC TYPE 2	EACH	4.00
0240	610 100 101	SEEDING AREA NO 1	ACRE	1.20
0250	610 100 102	SEEDING AREA NO 2	ACRE	0.20
0260	610 100 326	FERTILIZING AREA NO 1	ACRE	0.60
0270	610 100 490	TURF REINF MAT-NATURAL FIBER	SQYD	37.00
0280	610 100 555	CONDITION SEEDBED SURFACE	ACRE	1.20
0290	610 100 560	RIPRAP REVEGETATION	SQYD	16.00
0300	610 100 561	EROSION CONTROL BLANKET-LONG-TERM	SQYD	465.00
0310	610 100 575	COIR EROSION CONTROL NET	SQYD	465.00
0320	610 220 100	MULCH	ACRE	0.20
0330	613 100 030	RIPRAP-CLASS 1 RANDOM	CUYD	3.20
0340	613 100 040	RIPRAP-CLASS 2 RANDOM	CUYD	285.90
0350	618 030 015	TRAFFIC CONTROL-FIXED	UNIT	500.00
0360	618 030 080	TRAFFIC CONTROL-LS	LS	1.00
0370	619 010 230	REMOVE SIGN	EACH	6.00
0380	622 011 043	PERM EROSION CONTROL-HIGH SURV	SQYD	490.00
0390	622 011 084	GEOTEXTILE STABILIZATION	SQYD	305.00

TABLE OF CONTENTS
FEDERAL AID PROJECT(S) STPB 9044(31)

1. PROJECT DESCRIPTION [102] 5
2. CONTRACT TIME [108] (REVISED 1-21-16) 5
3. EXPEDITED NOTICE TO PROCEED [108] (REVISED 11-3-11) 5
4. CONTRACT DOCUMENTS [102] (REVISED 3-10-22) 6
5. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 1-18-18) 6
6. DBE QUOTES [102] (REVISED 3-10-16) 6
7. DBE USAGE [102] (REVISED 2-13-20 M) 6
8. LABOR REQUIREMENTS [102] (REVISED 9-5-19) 7
9. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 3-12-20) 7
10. ZONE PAY [102] (REVISED 5-10-18) 7
11. BIDDING REQUIREMENTS – PROPOSAL GUARANTEE [102] (REVISED 12-17-20) 7
12. DELIVERY AND PUBLIC OPENING OF PROPOSALS [102] (ADDED 9-17-20) 7
13. SOIL BORING INFORMATION [102] (REVISED 1-16-14) 8
14. 103.07 EXECUTION AND APPROVAL OF CONTRACT [103] (ADDED 6-13-19) 8
15. BIDDER'S PROPOSED AGGREGATE SOURCE(S) [103] (REVISED 1-24-19) 8
16. PARTNERING- LEVEL II FACILITATION [105] (ADDED 2-25-21) 9
17. STEEL PRICE ADJUSTMENT [106] (REVISED 10-28-21) 9
18. STATUS OF UTILITIES [108] (ADDED 1-1-03) 10
19. NOTICE TO BIDDERS [108] (ADDED 11-21-08) 10
20. SUBCONTRACTING [108] (ADDED 9-23-21) 10
21. BILLING CYCLE [109] (ADDED 8-12-21) 11
22. CLEAN WATER ACT SECTION 404 PERMIT AND SECTION 401 CERTIFICATION 11
23. STREAM PROTECTION ACT 124 [107] [208] 13
24. GREATER SAGE-GROUSE CONSERVATION 14
25. ENVIRONMENTAL SPECIFICATIONS [208] (ADDED 9-9-21M) 14
26. STORM WATER PERMITTING REQUIREMENTS UNDER THE MONTANA POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [208] (REV 3-16-17) 14
27. MONTANA FLOODPLAIN AND FLOODWAY MANAGEMENT ACT [107] 17
28. INCREASE IN TURBIDITY [208] (REVISED 10-8-15) 17
29. SEQUENCE OF OPERATIONS 18
30. BRIDGE END BACKFILL DRAINS (REVISED 12-11-15) 18
31. BRIDGE DEMOLITION NOTIFICATION 19
32. BASE PRICE FOR CONCRETE [551] (REVISED 12-17-20) 19

33. CONCRETE - CLASS STRUCTURE LOW SLUMP (REVISED 9-9-21) 19
34. SALVAGED MATERIAL 19
35. ALTERNATE PRESTRESSED CONCRETE BEAM SECTIONS 20
36. TURF REINFORCEMENT MAT DRAINAGE CHUTE 20
37. REMOVE SIGNS 21
38. TRAFFIC CONTROL DEVICES – PLASTIC DRUMS [618] (REVISED 1-23-20) 21
39. RIPRAP [701] (REVISED 9-23-21) 21

SECTION II
Nondiscrimination Notice
Seeding Special
Permit Maps
Logs of Boring

SECTION III
Standard Provisions & Requirements

SPECIAL PROVISIONS

FEDERAL AID PROJECT NO(S). STPB 9044(31)

(REVISED 09-09-21)

The following special provisions are hereby made part of the contract and supplement and/or supersede any sections of the Standard and Supplemental Specifications of Road and Bridge Construction, adopted by the Montana Department of Transportation and the Montana Transportation Commission and all supplements thereto in conflict therewith.

The following documents are hereby incorporated by reference into this contract:

- "Standard and Supplemental Specifications for Road and Bridge construction 2020 V2.3 Edition" found at the following link: https://www.mdt.mt.gov/other/webdata/external/const/specifications/2020/SPEC-BOOK/2020-SPEC-BOOK-V2.3.pdf
- The most recent version of the Detailed Drawings can be found at the following link: https://www.mdt.mt.gov/business/contracting/detailed_drawings.shtml
- The most recent version of the Materials Manual can be found at the following link: https://www.mdt.mt.gov/other/webdata/external/materials/materials_manual/MDT_MATERIALS_MANUAL_090921_LETTING.pdf

The latest version of the Standard and Supplemental Specifications, Quarterly updates, and revision summaries can be found at the following website: https://www.mdt.mt.gov/business/contracting/standard_specs.shtml

The Question-and-Answer Forum opens at 5:00 p.m. on the bid letting advertisement date and closes at 10:00 a.m. on the Monday before the bid letting. If Monday is a state holiday, the forum will close on Friday before the bid letting at 3:00 p.m. Questions raised by potential bidders on this project and answers and other information posted by the Department on the "Question and Answer Forum" can be found at the website https://www.mdt.mt.gov/business/contracting/qacurrent.shtml up to 5 p.m. on the day before the bid letting.

The U.S. Department of Transportation (DOT) operates a toll-free number at 1-800-424-9071, 24 hours a day - 7 days a week. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use this number to report such activities. All information will be treated confidentially, and callers may remain anonymous.

The Department attempts to provide reasonable accommodations for any known disability that may interfere with a person participating in any service, program, or activity of the Department. Alternate accessible formats of this document will be provided upon request. If reasonable accommodation is needed to participate in Department bid lettings, call the Civil Rights Bureau at 444-6331 or TTY 406-444-7696 [TTY 1-800-335-7592 (toll free)].

1. PROJECT DESCRIPTION [102]

Bridge replacement, grading, and guardrail on the Big Porcupine Cr – 14M E Ingomar project located in Rosebud County. The project is located along Rosebud County Local Route L44103 (Big Porcupine Creek Road) approximately 14 miles east of the town of Ingomar between RP 10.1 and RP 10.2.

2. CONTRACT TIME [108] (REVISED 1-21-16)

The work begins on the effective date stated in the Notice to Proceed (NTP) and is to be completed in 90 Working Days. The NTP will be issued with an effective date of April 4, 2022.

3. EXPEDITED NOTICE TO PROCEED [108] (REVISED 11-3-11)

This project will have an expedited Notice to Proceed. The awarded Contractor is required to submit the completed performance and material bonds, and insurance certificates five calendar days after the project is awarded, with the day after the award counting as the first

day. The Notice to Proceed will be issued with an effective date set approximately ten days after the award date.

4. CONTRACT DOCUMENTS [102] (REVISED 3-10-22)

The following documents are now available within the Contractors Reference Material on the Department's Contracting and Bidding webpage https://www.mdt.mt.gov/business/contracting/ :

1) Table of Contractor's Submittals. (Revised 3-10-22)
2) Traffic Control Rate Schedule
3) Erosion Control Rates

5. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 1-18-18)

The DBE goal for this contract is 0.00%. Use the AASHTOWare Project Bids™ Electronic Bid System (EBS) to print the DBE submittal and timing requirements. If the contract does not have a project-specific goal, the field will display in the AASHTOWare Project Bids™ bid file as a blank field.

List the DBE commitments in the EBS file. An on-line DBE Directory is available at: https://app.mdt.mt.gov/dbe/dbe/search.

If the DBE goal cannot be met, show a good faith effort per the Good Faith Effort Criteria and supporting forms, available at: http://www.mdt.mt.gov/publications/forms.shtml. Submit the Good Faith Effort documentation within 48 hours of the bid opening.

6. DBE QUOTES [102] (REVISED 3-10-16)

The Department has a quick and easy way for you to request quotes from Montana DBE-certified companies. The information goes to the DBE companies that same day. The on-line form is located at web site: https://app.mdt.mt.gov/dbeqt/.

Call the Department DBE Supportive Services, 1-800-883-5811, for further assistance. Using this online request form will be considered for good faith efforts, but it does not constitute meeting all requirements of good faith efforts.

7. DBE USAGE [102] (REVISED 2-13-20 M)

Contract specific goals are not placed on contracts; however, the Department has an overall 6.5% DBE goal it must achieve. To assist contractors in determining their DBE commitment level, the Department has reviewed the estimates for this contract, and has established an aspirational goal of 5.6% DBE usage. Although not a contract requirement, the Department believes that the aspirational goal can realistically be achieved through race neutral measures based on current availability of DBEs and standard competitive procurement processes. While the utilization is not mandatory to be awarded the project, continuing utilization of DBE firms on contracts supports the success of Montana's DBE Program.

Any project listing a 0% DBE aspirational goal does not mean that a DBE may not be used on that project. A 0% DBE aspirational goal may have been established due to any of the following reasons:

- Limited identified subcontracting opportunities;
- Minimal contract days; and/or,
- Small contract dollar amount.

Contractors are encouraged to identify any opportunities to subcontract to DBEs.

The Department's DBE directory may be found at the following website: https://app.mdt.mt.gov/dbe/dbe/search.

8. LABOR REQUIREMENTS [102] (REVISED 9-5-19)

Pay the minimum wage rates contained elsewhere in the bid package. Comply with the required contract provisions contained in the form FHWA 1273 included with this contract. To obtain more information, contact the Department's Construction Engineering Services Bureau at 2701 Prospect, Helena, MT (406)475-2258, (800)335-7592 (TTY) or (406)444-7297 (Fax). The local employment service office, designated by the Workforce Service Division, Department of Labor & Industry, for this project is Miles City.

Executive Orders 13658 and 13706 do not apply to this contract.

9. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 3-12-20)

The Contractor and all subcontractors must use AASHTOWare Project Civil Rights & Labor™ (CRL) to submit Certified Payrolls (CPRs). Ensure that all subcontractors have submitted their Vendor Access Form which can be found on the following page: https://www.mdt.mt.gov/business/contracting/prevailing-wage.shtml to the Department and have received their login IDs prior to work.

Request the contract number and project ID(s) from the Project Manager. Provide the information to all subcontractors subject to the FHWA 1273 requirements. This information is also available using the Search Awarded Contracts located at: https://app.mdt.mt.gov/project-search/project/search.

Provide assistance and ensure all subcontractors submit CPRs electronically into CRL within the required timeframe.

10. ZONE PAY [102] (REVISED 5-10-18)

Wage rates and zone pay requirements can be found elsewhere in the proposal. The mileage for determining the zone is 128 miles.

Indicate the Zone requirements for all classifications. Provide this information to the Project Manager at the Preconstruction Conference on Form MDT-CON-102_02.

11. BIDDING REQUIREMENTS – PROPOSAL GUARANTEE [102] (REVISED 12-17-20)

Subsection 102.07(C)(2), Proposal Guarantee, of the Standard Specifications is hereby rescinded and replaced with the following:

Proposal Guarantee. The bid bond is on the most current version of MDT-CTP-102-07-1; is signed and sealed in the proper places; a copy of the agent's Power of Attorney for the insurance company is attached; and contains the correct and complete project number; all signatures are original (stamped signatures are unacceptable). A qualified third-party surety agency must verify the proposal guarantee. Electronic bid bond verification must be submitted through AASHTOWare Project Bids and Bid ExpressTM . Contact Bid Express for more information on electronic bid bond verification.

If an error occurs with electronic bid bond verification through AASHTOWare Project Bids and Bid Express, submit the Electronic Bid Bond Form MDT-CTP-102-07-2 in Adobe PDF format via email to mdtcntplns@mt.gov prior to the bid opening. Hard copy or paper bid bonds submitted to the Department will not be accepted. Bids that include submission of a bid bond without electronic verification or Electronic Bid Bond Form CPB_102_07 will be deemed non-responsive.

12. DELIVERY AND PUBLIC OPENING OF PROPOSALS [102] (ADDED 9-17-20)

Subsection 102.10(A) Bid Submission by Sealed Envelope is hereby rescinded.

Submissions by sealed envelope will be deemed non-responsive.

13. SOIL BORING INFORMATION [102] (REVISED 1-16-14)

The Department routinely conducts subsurface investigations and laboratory testing to collect soil, rock and groundwater information ("geotechnical information") within the anticipated limits of upcoming projects and maintains a comprehensive set of this information in its geotechnical file. For this contract, geotechnical information has been collected by the Department and logs of boring summarizing this information have been included in the Special Provisions and Plans. "Logs of Borings" in the Special Provisions and Plans are based on an interpretation of the field investigation and laboratory testing data, and do not include all the geotechnical information that may be available. The geotechnical information contained in the "Logs of Borings" has been edited or abridged and may not reveal all the geotechnical information which might be useful or of interest to the bidder.

The comprehensive set of geotechnical information is considered too voluminous to include in the bidding package. The geotechnical information that the Department has is available for review or copying upon request. Rock core samples are regularly retained as well. All bidders are expected to fully review all of the geotechnical information prior to submitting their bid. The prime bidder is responsible for ensuring that a firm submitting a subcontractor quote for the prime's use is aware of all available geotechnical information.

Submission of a bid without fully reviewing the Department's comprehensive set of geotechnical information or accepting a quote from a subcontractor without verifying that the subcontractor reviewed all available geotechnical information is a business decision by the bidder. Failing to fully review all available geotechnical information waives the contractor from making any claim, whether termed "superior knowledge", "justifiable reliance", "differing site condition", or otherwise, against the Department for any information that may be included in the comprehensive geotechnical information file and not shown, or not fully shown, in the "Logs of Borings" contained in the contract documents.

Soil, rock, and groundwater conditions shown on the logs of boring apply only at the specific boring locations and at the time the borings were made. They are not warranted to be representative of subsurface conditions at other locations or times. Groundwater conditions commonly vary seasonally and from that encountered during drilling. Determination of a material's classification is based in part on judgment and opinion. The Department assumes no responsibility for any variation or misinterpretation of the classification of materials.

Utilize the Question and Answer forum to request additional geotechnical information or to submit questions regarding the geotechnical information. To review all available geotechnical information, submit a request in writing to the Department's Geotechnical Section to schedule a time to review the available geotechnical information. Requests for access should be made a minimum of 10 business days prior to the bid opening.

14. 103.07 EXECUTION AND APPROVAL OF CONTRACT [103] (ADDED 6-13-19)

Use DocuSign to sign the contract in accordance with Subsection 103.07.

No later than 5 calendar days after the date of bid-opening (the date of bid opening to count as the first full day), the apparent low bidder must submit to Construction Contracting Bureau, during its regular work hours, a fully completed Contract Recipients Form documenting names and emails of authorized agents of the Contract and Surety to sign the contract. If the 5th day is a holiday, turn the documentation in earlier. The Contract Recipients Form is available at the following web page: https://www.mdt.mt.gov/publications/forms/contract-recipients.shtml.

The bid proposal may be considered non-responsive and rejected if the above form(s) are not submitted within the required time frame.

15. BIDDER'S PROPOSED AGGREGATE SOURCE(S) [103] (REVISED 1-24-19)

No later than 7 calendar days after the date of bid-opening (the date of bid opening to count as the first full day), the apparent low bidder must submit to Construction Contracting

Bureau, during its regular work hours, a fully completed Form MDT-CON-106-02-3 for each aggregate source the bidder used to prepare its bid, or a subcontractor used to prepare its quote, if used by the bidder for its bid. (If the 7th day is a holiday, turn the documentation in earlier.)

The Bidder's Proposed Aggregate Source form is available at the following web page: https://www.mdt.mt.gov/publications/forms/const_forms.shtml

The bid proposal may be considered non-responsive and rejected if the above form(s) are not submitted within the required time frame.

16. PARTNERING- LEVEL II FACILITATION [105] (ADDED 2-25-21)

An internal partnering meeting will be facilitated between the Project Manager and the Contractor prior to the Notice to Proceed date.

Implement partnering in accordance with the Montana Partnering Field Guide found at the following link: https://www.mdt.mt.gov/publications/manuals.shtml#con

Make a good-faith effort to settle any unresolved discrepancies by utilizing the Partnering Escalation/Issue Resolution Ladder identified in the Partnering Field Guide prior to submitting a notice of claim.

17. STEEL PRICE ADJUSTMENT [106] (REVISED 10-28-21)

A. General. The Contractor may elect to participate in a Steel Price Adjustment to payments for selected bid items made primarily of steel. Payment adjustments will only be made for fluctuations in the cost of the steel material. No adjustment will be made for changes in the cost of manufacturing, fabrication, shipping, storage, for any products purchased from the mill prior to the letting date, or for steel that is not permanently incorporated into the work.

The price adjustment will be based on the base price per pound of steel and changes to the steel price index between the bid letting date and the steel purchase date. Payment adjustments may be positive or negative.

Steel Price Index: The Department will use the Bureau of Labor and Statistics Producer Price Index (BLS PPI) "Steel Mill Products" Series ID WPU1017 not seasonally adjusted. The index used will be the final version of the index, revised 4 months after the original publication, including any corrections to the index.

The base price per pound of steel for this contract is: $0.65.

B. Applicable Bid Items. Notify the Project Manager in writing by the Notice to Proceed date or at the pre-construction conference, whichever comes first, of any intent to participate in the steel price adjustment. Select the bid items for participation at the time of notification to the Project Manager. No changes will be allowed after submission.

Nuts, bolts, rebar chairs, connecting bands, and other miscellaneous hardware items will not be included in the price adjustment. High strength bridge bolt assemblies may be included in the price adjustment.

C. Steel Price Index. Furnish the following documentation for all steel bid items selected for steel price adjustment regardless of whether the index increased or decreased:

1) Paid invoice or other proof of purchase showing the date the steel was purchased and the weight of the steel.

2) An affidavit signed by the Contractor stating that the information provided is true and accurate.

3) Submit all documentation prior to incorporating the steel into the work. This provision in no way modifies or cancels the requirements of Subsection 106.09.

D. Steel Price Adjustment. The Project Manager will calculate the adjustments. Adjustments may be positive, negative, or non-existent depending on the difference between the Base Index (IB) and Current Index (IC). No price adjustment will be made unless the IC is 10% higher or lower than the IB.

For Increases:

Adjustment Factor (AF) = (IC/IB-1.10), rounded to the nearest 0.01
If AF is equal to or less than 0, no adjustment.
If AF is greater than 0, continue
Payment Adjustment = AF x weight x base price

For Decreases:

Adjustment Factor (AF) = (IC/IB-0.90), rounded to the nearest 0.01
If AF is equal to or greater than 0, no adjustment.
If AF is less than 0, continue
Payment Adjustment= AF x weight x base price

Where:
IB = BLS PPI for month contract was let
IC = BLS PPI for month material was purchased from the mill (invoice date)
Weight = weight of steel in pounds

18. STATUS OF UTILITIES [108] (ADDED 1-1-03)

Utility relocation work is not complete and will not be complete as of the letting date and contract award date. Project work must be coordinated with the utility company relocation activities until the utility relocation work is complete. Under no circumstances will a delay in relocating utility facilities be considered as justification for additional compensation.

Should unforeseen conditions arise which substantially delay the utility relocation work, and the delay results directly in a delay to the project work, make a written request to the department for a time extension, see Subsection 108.07.4.

Company: Range Telephone Cooperative, Inc.;
Facility: Communication cable;
Contact: Frank Miller;
e-mail: Frank.miller@rangetel.coop;
Telephone (office): 406-347-2226;
Telephone (cell): 406-939-7613, 406-939-7613 cell

19. NOTICE TO BIDDERS [108] (ADDED 11-21-08)

This project is funded in whole or in part by funds received from the Federal Highway Administration (FHWA), and its construction is wholly contingent on the state's continued receipt of those federal funds. If the federal funds are reduced or not received, the Department may choose to terminate the contract for convenience under the provisions of Subsection 108.10. Any bidder on this project, by submitting its bid, understands and accepts the possibility of the contract being terminated in the event federal funds are reduced or not available and by submitting a bid, each bidder waives any claims for costs or damages other than as specifically allowed by Subsection 108.10.2. In particular, bidders understand and accept that no payment will be allowed for any claimed anticipated profit for work not performed.

20. SUBCONTRACTING [108] (ADDED 9-23-21)

The following changes are made to Subsection 108.01:

1) Within Subsection 108.01.1 Subcontracting, rescind the 4th paragraph which begins “Include in the written subcontract…” and replace with the following:

“Include the following language in the subcontract:”

Rescind the last paragraph and replace with the following:

Do not hire or use in any manner a person or organization that performed any part of the design work for the Department unless first approved by the Department.

2) Within Subsection 108.01.2 Contract Performance, rescind the 4th and 5th paragraphs and replace with:

Do not allow a Subcontractor at any contract tier to start work until a subcontract is consented to by the CES Bureau. Submit fully executed subcontracts in electronic DocuSign PDF format. Scanned PDF subcontracts are not acceptable. Include the Consent of Surety language and Subcontractor Checklist as part of the subcontract agreement, referenced on the Subcontracting Resources webpage:

https://www.mdt.mt.gov/business/contracting/resources.shtml

Inform the Subcontractor of all the contract provisions, and that the Subcontractor is bound by all terms of the prime's contract with the Department. Provide the Subcontractor a copy of all the contract provisions including the applicable Federal Prevailing Wage rates and Required Contract Provisions FHWA 1273. Include in the subcontract the following language:

"The Subcontractor agrees to comply with all of the labor provisions contained in the attached Required Contract Provisions and Federal Prevailing Wage/Davis Bacon Wage Decision."

Rescind the last paragraph and replace with the following:

Department approved consent to subcontract, assign or transfer the contract does not release the Contractor from liability under the contract and bond.

21. BILLING CYCLE [109] (ADDED 8-12-21)

Rescind the last paragraph of subsection 109.06.1 Billing Cycle which begins "Pay all subcontractors." and replace with the following:

Pay all subcontractors within 7 calendar days after receipt of a periodic or final payment from the Department. Payment must be for the full amount due the subcontractor (including retainage) for work performed or materials provided that were included in the periodic or final payment according to the provisions of Section 28-2-2103(2)(a) MCA. A subcontract may not provide for a time longer than the law's mandated 7 calendar days.

22. CLEAN WATER ACT SECTION 404 PERMIT AND SECTION 401 CERTIFICATION

A. Description. This provision describes the project work that has been authorized under Sections 404 and 401 of the Clean Water Act (CWA) and the associated conditions that must be adhered to for compliance with CWA requirements.

B. Section 404 CWA Nationwide Permit 23 Description. The permanent features of this project are authorized under a US Army Corps of Engineers Nationwide Permit 23 – Approved Categorical Exclusions, (Army Corps File Number NWO-2021-01239-MTB).

1) The permit for this project authorizes the following project work to be performed within waters of the US.

Bridge replacement at Big Porcupine Creek. (STA 08+52 to 10+13) Section 29, Township 10N, and Range 37E. Latitude 46.584721, Longitude -107.095641. The project involves the replacement of a structurally deficient bridge over Big Porcupine Creek with a new 31.3-feet by 50-feet bridge. As a result of construction activities, approximately 0.07 acres of wetlands and 101 linear feet (LF) of Big Porcupine Creek will be permanently impacted.

2) This authorization is valid until March 18, 2022

3) Obtain the Nationwide Permit 23 Fact Sheet that fully describes the Nationwide Permit 23 and lists the General Conditions that must be adhered to for this authorization to remain valid. Adhere to the General Conditions.

C. Section 404 CWA Nationwide Permit 33 Description. Obtain authorization for the temporary features of this project (e.g. work bridges, work pads, cofferdams, diversions, etc.) under US Army Corps of Engineers Nationwide Permit 33 – Temporary Construction, Access, and Dewatering.

1) Acquire an additional Section 404 Permit and 401 Certification authorization for temporary discharges that are:

a) Located within 100 feet of the water source in natural spring areas;

b) Includes features that extend out from the existing bank line greater than 25% of the bankfull channel width;

c) Within the boundaries of any Tribal Reservation or Tribal trust lands;

d) Within the following waterways and their impoundments: Kootenai River, Missouri River, Yellowstone River, Bitterroot River, Clark Fork River (tributary to the Columbia River), Flathead River, Flathead Lake, and Milk River; or,

e) Within Special River Management Zone of the Upper Yellowstone River.

Prepare and submit a joint application in accordance with Section 208.03.3. MDT is not responsible for delays caused by incomplete or inaccurate submittals by the Contractor.

2) For all other temporary discharges, submit a written description to the Project Manager detailing the temporary facilities planned for the project, along with the associated restoration plan. Allow 5 working days for the Project Manager to review the plan and confirm CWA 404 pre-construction notification is not required. For temporary discharges authorized under Nationwide Permit 33 without pre-construction notification, the authorization is valid until March 18, 2022.

3) Obtain the Nationwide Permit 33 Fact Sheet that fully describes the Nationwide Permit 33 and lists the General Conditions that must be adhered to for this authorization to remain valid. Adhere to the General Conditions.

D. CWA Section 404 Regional Conditions. Obtain the 2017 Nationwide Permits Regional Conditions, Omaha District, State of Montana, Effective March 19, 2017, that also apply to this project and must be adhered to for these authorizations to remain valid. Adhere to the Regional Conditions, including but not limited to the following:

1) Temporary fills in wetlands must be placed on a horizontal marker layer, such as fabric or certified weed-free straw, to delineate the pre-project ground elevation and facilitate complete fill removal and site restoration.

2) All erosion control blanket or fabric used in or adjacent to waters of the U.S. must be comprised of degradable material to ensure decomposition. Do not use material that includes stabilized netting or stabilized open mesh, as these products take a long time to degrade and they can trap small animals, birds, amphibians and fish. This prohibition also applies to mesh materials used for wattles, rolled materials, and bank wraps. Erosion control blanket or fabrics that break down within 24 months are acceptable. Non-degradable blankets or fabric may be allowed on a case-specific basis if it will be buried beneath riprap or structures and it is not likely to be exposed. Non-degradable blanket or fabric that becomes exposed within waters of the US must be removed.

E. CWA Section 401 Water Quality Certification is granted for Nationwide Permit 23 by the Montana Department of Environmental Quality (DEQ), provided that certain general and special conditions are met.

1) Obtain the water quality certification requirements issued by DEQ on March 6, 2017. Adhere to those general and special conditions.

2) Adhere to the notification requirement of the DEQ 401 Certification Special Conditions. Notify the DEQ Water Protection Bureau – Discharge Permitting Program within 48 hours of commencement of the regulated activity. Send notification to DEQWPBPublicComments@mt.gov or fax (406)444-1374 Attention Water Protection Bureau. Provide confirmation of this notification to the Engineering Project Manager. Notification shall include at minimum the following information:

a) Statement that the notification is being submitted for an MDT Project

b) MDT Project Name

c) Statement that the work is being conducted under a CWA Nationwide Permit 23

d) The legal description(s) of the permitted activities included in Section B above and included here: Bridge replacement at Big Porcupine Creek. (STA 08+52 to 10+13) Section 29, Township 10N, and Range 37E. The project involves the replacement of a structurally deficient bridge over Big Porcupine Creek with a new 31.3-feet by 50-feet bridge. As a result of construction activities, approximately 0.07 acres of wetlands and 101 linear feet (LF) of Big Porcupine Creek will be permanently impacted.

e) The decimal latitude(s) and longitude(s) to the millionth degree (six significant figures to the right of the decimal point) for the permitted activities, which are provided in Section B above and included here: Latitude 46.584721, Longitude -107.095641.

F. Copies of the 2017 Nationwide Permit Fact Sheets for Nationwide Permits 23 and 33, the 2017 Nationwide Permit Regional Conditions for the State of Montana, and DEQ's 401 Water Quality Certification Requirements for the 2017 Nationwide Permits are available upon request from Environmental Services or on the web at http://www.mdt.mt.gov/business/contracting/environmental/cwa.shtml .

Coordinate with the engineering project manager if you have questions regarding this authorization. Proposed changes to the permanent structures should be directed to the project manager for coordination with the District Project Development Engineer in the Environmental Services Bureau. Temporary facility permitting and/or general permit questions should be directed to the project manager for coordination with the District Environmental Engineering Specialist.

23. STREAM PROTECTION ACT 124 [107] [208]

A. Description. The proposed project has been authorized by Preconstruction Stream Protection Act (SPA) 124 No.: MDT-R7-52-2021, by Montana Fish, Wildlife, and Parks (FWP); provided the General and Special Conditions listed below are followed. This Preconstruction SPA 124 authorizes the permanent features at the following locations:

Station	Waterbody
9+25	Big Porcupine Creek

B. General Conditions

1) Meet the specifications listed in Subsection 208.03.3.

2) Install and maintain Best Management Practices and temporary erosion control measures where appropriate to protect the waterbodies and adjacent areas listed in the table above. Conduct all work in a manner that minimizes turbidity and other disturbance to these areas.

3) All surface applied erosion control materials used in or adjacent to the waterbodies listed in the table above must comply with Specification 713.12 and be comprised of natural fiber and biodegradable material to ensure decomposition. This condition also applies to mesh materials used for wattles, rolled materials, and bank wraps placed within the bed and banks of the waterbodies listed in the table above.

4) Limit the clearing of vegetation to only what is necessary for the construction of the project within riparian areas. Restore temporary access routes and any temporarily disturbed areas to original conditions, including original contours and vegetation reclamation.

5) Obtain a temporary facility SPA 124 Permit/Authorization. This Preconstruction SPA 124 Permit/Authorization does not cover the construction of temporary facilities such as work bridges, work pads, cofferdams, temporary detours, diversions, etc. This authorization does not include removal and disposal of the existing structures, access to and from authorized locations, sequencing, and construction methodology to construct authorized features, or any other unauthorized impacts affecting permitted drainages. These items, and any other items not

covered here but potentially affecting a stream/river or its channel(s), need to be permitted separately by the Contractor.

C. Special Conditions

1) The authorization is valid for two years from the date of issuance (8/30/21).

2) The proposed work exceeds the scope of the Programmatic Environmental Assessment for a FWP issued Water Quality Discharge Permit (318 Permit) therefore application to the Montana Department of Environmental Quality for 318 Permit is required.

Copies of the Preconstruction SPA 124 Authorization are available upon request from Environmental Services.

Contact the Project Manager for coordination with the District Biologist on questions regarding this authorization.

24. GREATER SAGE-GROUSE CONSERVATION

A. Description. Greater Sage-Grouse is a species of concern under state management actions: Executive Order (E.O.) No.12-2015 and Montana Greater Sage-Grouse Stewardship Act. These management actions established procedures and stipulations for activities in designated general and core greater sage-grouse habitat and connectivity areas.

This project is located entirely within designated core habitat for the greater sage-grouse. Specifically, designated core habitat overlaps the limits of this entire project. This project's limits are not within 4.0-miles of an active sage-grouse lek.

B. Requirements.

1) A timing restriction on this project's construction because of sage-grouse was not imposed.

2) Weed management is required within designated habitat for greater sage-grouse. Reclamation of disturbed areas must include control of noxious weeds and invasive plant species, including cheatgrass (Bromus tectorum) and Japanese brome (Bromus japonicus).

3) Coordinate with the MSGHCP (https://sagegrouse.mt.gov/) on all contractor responsible activities located outside MDT Right-of-Way in designated sage-grouse habitats which require the contractor to obtain a state permit or authorization prior to conducting work. MDT has completed consultation with the MSGHCP only for proposed work located within MDT Right-of-Way. A copy of the consultation letter from the MSGHCP is available upon request from Environmental Services.

4) Seed any disturbed areas with desirable plant species as soon as practicable after construction to reduce the spread and establishment of noxious weeds and to re-establish permanent vegetation.

C. Measurement and Basis for Payment. Work described in this provision is not measured for payment. Consider all costs, including any mitigation required by the MSGHCP, associated with this provision incidental to performance of the work. Include the cost in the cost of other items.

25. ENVIRONMENTAL SPECIFICATIONS [208] (ADDED 9-9-21M)

The Contractor is required to review and meet the specifications of the following subsections:

Migratory Bird Treaty Act Compliance – Vegetation Removal	Subsection 208.03.4A(1)

26. STORM WATER PERMITTING REQUIREMENTS UNDER THE MONTANA POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [208] (REV 3-16-17)

A. Description. The Montana Department of Environmental Quality (DEQ) regulates storm water discharges under the MPDES program. If the bid package contains blank erosion control plans, a construction storm water discharge permit authorization will be required. If not, a

storm water discharge permit authorization may be required for this project depending on Contractor's operations. Sum the disturbance area (as defined by DEQ) identified in the contract with the area of disturbance caused by contractor operations to determine if the permit acreage threshold is exceeded. Contractor operations can include, but are not limited to, the following support activities: staging areas, access roads, material storage areas, temporary concrete or asphalt batch plants, borrow areas, areas used for fill placement, etc. If the summed disturbance area is one acre or more, use the DEQ authorization to discharge under the MPDES General Permit for Storm Water Discharges Associated with Construction Activity for this project. In order to facilitate permit transfer, separate NOI packages are required for areas within the right-of-way and areas outside of the right-of-way. A Notice of Intent (NOI) package includes a Notice of Intent, with a topographic map, a Storm Water Pollution Prevention Plan (SWPPP), the erosion control plans, sage grouse consultation letter, if applicable, and supporting documentation.

Blank Erosion Control Plans, and a topographic map, are provided with the plans if the plans include greater than 1 acre of disturbance. Complete the erosion control plans as required by the general permit. Complete the SWPPP using DEQ's most current SWPPP Form.

B. Materials. Follow the requirements described in the Department's *Erosion and Sediment Control Best Management Practices Manual (December 2016).* Rescind Section 208 detailed drawings. Submit to the Project Manager for review and acceptance BMPs proposed for use that are not included in the Manual.

C. Construction Requirements.

1) MPDES Permit Required.

a) Submit one NOI package and the associated fees to DEQ for ground disturbance areas shown in the plans or within the right-of-way. For ground disturbance areas shown in the plans and any other areas within the right-of-way where Contractor activities causing ground disturbance are planned, the Contractor is the sole permittee until construction is complete and the General Permit is transferred to the Department or another entity.

The Department is not responsible for delays caused by incomplete or inaccurate submittals by the Contractor.

Comply with the requirements of the General Permit for Storm Water Discharges Associated with Construction Activity and implement the SWPPP. Provide two copies of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Do not begin construction activities until the required copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ is received by the Project Manager.

b) Submit a separate NOI package and the associated fees to DEQ for ground disturbance and support activity areas outside the right-of-way and not shown in the plans. Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans, are the Contractor's responsibility and must be submitted under a separate NOI package from the ground disturbance within the right-of-way. For all support activities outside the right-of-way which are not part of a larger commercial operation serving multiple unrelated construction activities, and will not continue operation beyond the completion of the contracted road construction activity, a notice of intent package must be submitted to DEQ to obtain an authorization under the storm water construction permit. Sand and gravel borrow area operations, gravel pits, and/or concrete batch plants that will continue operation beyond the completion of the contracted road project, are part of a larger commercial operation, or serving multiple unrelated construction activities must obtain permit coverage under the Multi-Sector General Permit for Storm Water Discharges Associated with Industrial Activity (MSGP) regardless of acreage size of the activity if the activity does not already have MSGP authorization. The Contractor is the sole permittee until stabilization is complete and the

General Permit is terminated or transferred to another entity. The Department is not responsible for delays caused by incomplete or inaccurate submittals to DEQ by the Contractor.

Provide a copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Be responsible for all temporary erosion, sediment, and pollution prevention controls for Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans.

c) Complete and document all inspections in accordance with the requirements of the General Permit for Storm Water Discharges Associated with Construction Activity. Use DEQ's most current self-inspection form available online at: http://deq.mt.gov/Water/WPB/mpdes/stormwaterconstruction. Provide a copy of all inspection reports to the Project Manager.

Report potential noncompliance in accordance with applicable regulations, guidance, and permit conditions. Submit to the Project Manager within seven days of sending or receiving all correspondence to or from regulatory agencies regarding potential noncompliance or violations.

The temporary erosion and sediment control measures and devices to prevent pollution and control sediment transport and soil erosion will be inspected as part of the final inspection to ensure they are maintained and functioning properly. Do not transfer or terminate the General Storm Water Permit coverage until the BMPs are inspected and accepted and all records required under the permit, including inspection and monitoring reports, are furnished to the Project Manager. The Department may require that certain Best Management Practices (BMPs) be replaced by another type of BMP as a condition of permit transfer.

Upon approval of site conditions, measures, devices and all pertinent records, submit a signed copy of the Permit Transfer Notification Form provided by the Department. When submitting the General Storm Water Permit transfer package/application to the Department, include a check for the permit transfer fee. Make the check for the amount of the fee payable to the DEQ. The Department is not liable for the completeness or accuracy of Contractor records completed prior to the permit transfer. Upon receipt of the signed form, the Department will obtain signature of the new permit owner and submit to DEQ. Ensure permit conditions and responsibilities are met until confirmation of the transfer is received from DEQ. Defend and hold MDT harmless from any violations, claims, enforcement actions, penalties or fines issued for Contractor activities or recordkeeping that occurred prior to the transfer of the General Permit for Storm Water Discharges Associated with Construction Activity authorization.

If the Department concurs that final stabilization has been met during the final walk-through, the Contractor may submit a Notice of Termination form to DEQ. Pay the annual fee invoice due at the time of termination. Submit the annual fee invoice to the Project Manager for reimbursement.

2) MPDES Permit not Required.

The BMP-Administration item is included in contracts that may not meet either criteria for a MPDES permit but include ground disturbing activities. Complete BMP inspections and install BMPs, if necessary, in accordance with Section 208, if no storm water permit is required. Utilize form MDT-ENV-014, Water Pollution Control Inspection Report. A certified SWPPP Administrator is not required to conduct the inspections if no permit is required.

D. Method of Measurement. DEQ MPDES fees and monitoring costs associated with obtaining and maintaining the General Permit for Storm Water Discharges Associated with Construction Activity for ground disturbance areas both within and outside the right-of-way are not measured separately for payment.

If no permit is necessary, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item.

E. Basis of Payment. No additional payment will be made for the DEQ MPDES fees and monitoring costs associated with the General Permit for Storm Water Discharges Associated with Construction Activity. Include these costs in the Temporary Erosion Control-Lump Sum bid item.

For project including the BMP-Administration item, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item. Partial payment for the BMP-Administration will be monthly based on the lump sum contract price in accordance with Table 208-1 in Subsection 208.05.1.

Payment for BMPs required by an event or extra work, and approved by the Project Manager, will be measured and paid for in accordance with the Erosion Control Rate Schedule contained in the contract at a unit price of $1.00 per unit.

27. MONTANA FLOODPLAIN AND FLOODWAY MANAGEMENT ACT [107]

A. Description: This contract is located within the regulated floodplain of Big Porcupine Creek, Rosebud County, Montana, Community Panel Number 3000690018B. The Department has obtained a preconstruction floodplain permit from the Rosebud County Floodplain Administrator, P.O. Box 1200, Forsyth, MT 59327, 406-495-6153, for the permanent features associated with this contract. A copy of this floodplain permit is available upon request from the Project Manager.

This floodplain permit does not cover the construction of temporary facilities such as work bridges, work pads, cofferdams, temporary detours, diversions, etc. This permit does not include access to and from authorized locations, sequencing, or construction methodology required to construct authorized features, or other impacts to areas outside of the planned construction footprint.

B. Materials. Vacant.

C. Requirements.

1) Contact the floodplain administrator indicated above to determine floodplain permitting requirements, if any, for the temporary facilities and any other work within the floodplain not covered here or within the preconstruction floodplain permit.

2) If a floodplain permit is required, complete and submit the Joint Application for Proposed Work in Montana's Streams, Wetlands, Floodplains, and Other Water Bodies and required information directly to the floodplain administrator according to the floodplain permitting requirements along with the applicable fee. The Joint Application Form can be downloaded from: http://dnrc.mt.gov/divisions/water/operations/floodplain-management/permitting-and-regulations.

3) If a floodplain permit is not required, but the floodplain administrator requires other information, prepare and submit it directly to the floodplain administrator.

4) Submit copies of the application and other required information to the Project Manager concurrently with the submittals required in Subsections 208.03.4(B) and 208.03.4(C). Obtain all required permits or authorizations and furnish copies or permit approvals to the Project Manager before starting activities that require permits.

D. Method of Measurement and Basis of Payment. Work described in this provision is not measured for payment. Include the cost to obtain this permit and provide required information in the mobilization bid item.

28. INCREASE IN TURBIDITY [208] (REVISED 10-8-15)

A. Description. Montana Fish, Wildlife and Parks (FWP) has determined that this project may cause a significant increase in turbidity.

B. Requirement. Contact the Department of Environmental Quality (DEQ) to determine narrative conditions required to meet short-term (318 Authorization) water quality standards and protect aquatic biota.

1) Complete and submit the Joint Application for Proposed Work in Montana's Streams, Wetlands, Floodplains, and Other Water Bodies (Application Revised 6-5-2015) and all required attachments, according to the applications instructions. Form can be down loaded from: http://dnrc.mt.gov/licenses-and-permits/stream-permitting.

2) Application fees are the responsibility of the Contractor.

3) Do not begin any work that will affect a Montana stream, wetland, floodplain, and/or other water body until a valid 318 Authorization is received from DEQ. Other permits/authorizations may also be required for the proposed work.

C. Basis of payment. Include the cost to obtain this permit in the mobilization bid item.

29. SEQUENCE OF OPERATIONS

A. Traffic Control Plan. Provide traffic control according to Section 618, the "Traffic Control Rate Schedule" found elsewhere in this proposal.

B. Sequence of Operations – General. In addition to the requirements of Subsection 104.05, Maintenance of the Work and Subsection 108.04, Limitation of Operations, schedule operations in the sequences outlined below to provide the least amount of inconvenience possible to the traveling public.

1) A signed agreement by Rosebud County is available that outlines the requirement of this special provision.

2) Close road to through traffic and coordinate with Rosebud County regarding signing and notification of detour route before starting any work effecting the existing roadway.

3) Rosebud County will maintain detour roadway surfaces.

4) Complete new structure, including installing the new guard rail and Crushed Top Surfacing prior to opening to traffic.

30. BRIDGE END BACKFILL DRAINS (REVISED 12-11-15)

A. Description. This work is the installation of a Bridge End Backfill Drain consisting of drainage pipe within the Bridge End Backfill section at all bridge approaches as shown in the plans, or as directed by the Project Manager.

B. Materials.

1) Provide geotextile-wrapped 4-inch Corrugated Polyethylene Drainage Pipe conforming to AASHTO M 252 type SP requirements with class 2 perforations for backfill drainage pipe. The geotextile must meet the requirements of Section 716 for Subsurface Drainage Geotextile Filter, High Survivability, Class B.

2) Provide splices, fittings, and connectors that will not impede flow or damage the drainage pipe and have sufficient strength to withstand construction handling and permanent loading.

3) Provide rodent guards for each drain outlet consisting of steel screen with ½ inch by ½ inch openings and a stainless steel clamp or pre-manufactured guards meeting the opening requirements.

C. Construction Requirements. Store, transfer, and install Bridge End Backfill Drain material according to the manufacturer's recommendations.

1) Prior to installation, inspect Bridge End Backfill Drain material for damage. Replace any damaged or unusable material at no cost to the Department.

2) Place the Bridge End Backfill drain along the fill face of the pile cap with the bottom of the pipe at approximately the same elevation as the bottom of the Bridge End Backfill as shown in the Bridge Plans. Use Bridge End Backfill to bed the pipe and grade to drain.

3) Daylight outlet drains as shown in the Bridge Plans. Attach rodent guards.

4) Do not compact directly over the Bridge End Backfill Drain until a minimum of 12 inches of cover is placed over the Bridge End Backfill Drain.

D. Method of Measurement. Bridge End Backfill Drains are not measured for payment.

E. Basis of Payment. Include the cost of Bridge End Backfill Drains in the contract unit price for Bridge End Backfill.

31. BRIDGE DEMOLITION NOTIFICATION

Prior to demolition of structures in Montana, including highway bridges, a notification form is required to be submitted to the Montana DEQ Asbestos Control Program. The Montana Demolition Notification form MTACP02 is available through the program internet site at http://deq.mt.gov/Public/asbestos/Forms.

An inspection of the bridge has been conducted, including a review of as-built drawings and inspection photos for the bridge structures, and sampling of suspect materials. No asbestos containing materials have been identified. A copy of the asbestos inspection is available from the Department.

Submit the completed form to the DEQ and the Project Manager at least 10 calendar days prior to commencement of any bridge demolition activities. Provide a copy of the notification acknowledgement to the Project Manager upon receipt from the DEQ.

32. BASE PRICE FOR CONCRETE [551] (REVISED 12-17-20)

Price reductions measured by the cubic yard will be calculated using the greater of the contract bid price or $500 per cubic yard for the following items:

- Class Deck
- Class Overlay
- Class Structure
- Class Structure – Low Slump

Price Reductions for Class Drilled Shaft item will be calculated using the greater of the contract bid price or $300 per cubic yard.

33. CONCRETE - CLASS STRUCTURE LOW SLUMP (REVISED 9-9-21)

A. Description. Furnish Concrete – Class Structure Low Slump for all full depth bridge deck concrete, bridge barrier rail, and metal bridge rail curbing.

B. Construction Requirements. Furnish material meeting the requirements of Concrete – Class Structure, with the following modifications:

1) The maximum target value for slump is 3-inches with a tolerance of plus 1½-inches to minus 2-inches.

2) When used in bridge barrier rail or metal bridge rail curbing, the target slump may be adjusted to a maximum of 6-inches.

3) Overall Lot Pay Factor. The overall lot pay factor will be calculated for all bid items using Concrete – Class Structure Low Slump, except metal bridge rail.

4) Applicable Pay Factors. See Table 551-9 for applicable pay factors. Pay factors for strength, air content, and gradation are applicable. The pay factor for permeability is not applicable.

C. Measurement. Concrete – Class Structure Low Slump is measured by the cubic yard.

D. Basis of Payment. Include all costs associated with this provision in the bid price for Concrete – Class Structure Low Slump (CUYD).

34. SALVAGED MATERIAL

A. Description

Salvage all suitable timber and steel bridge materials to Rosebud County.

Dispose of material that is obviously not reusable.

B. Construction Requirements. Remove the structures in accordance with Section 202 of the Standard Specifications and these Special Provisions and neatly stockpile the salvaged material at the project site, as directed for pickup by the County. Cut steel truss members such that individual member lengths remain as largely intact as practical.

Contact Rosebud County Road Superintendent at (406)346-2261 at least three weeks before salvaged materials are ready for pickup.

Dispose of any material that remains eight weeks after the potential owners of the salvaged materials have been contacted. Load salvaged material onto Rosebud County's transport.

Dispose of all non-salvageable and any left-over salvageable material in accordance with all applicable laws, rules and regulations. Pay special attention to the following responsibilities:

1) Burning or burial of treated timbers and bridge decking is not an acceptable means of disposal under any circumstances.

2) Dispose of treated timbers in a licensed Class II landfill only. Advance written approval of the landfill manager may be required. If the landfill requires sampling of the timbers, the Project Manager will perform the sampling.

C. Basis of Payment. Payment for all costs associated with the disposal or salvage of all material and all costs of furnishing all materials, equipment, tools, and labor necessary and incidental to completing the work described under this item, is included in the lump sum bid for Remove Structure.

35. ALTERNATE PRESTRESSED CONCRETE BEAM SECTIONS

A. Description

1) General. The contractor may elect to use an alternate prestressed beam shape if the resulting change in superstructure depth is less than or equal to the superstructure depth shown on the plans.

2) Submittals.

a) Provide two sets of designs that meet the AASHTO and Montana Specifications shown on the Plans, to the Project Manager for review and approval. Show calculations for the beams, slab and reinforcing steel. Provide design information as required to either validate or alter the substructure as shown.

b) Provide five sets of shop drawings to the Project Manager meeting the requirements of Section 553 of the Standard Specifications. Shop drawings may be submitted on 11" x 17" sheets and may be furnished in Adobe Acrobat Reader (.pdf) format in lieu of hard copies. Have a professional engineer licensed in Montana sign, stamp or seal these plans and designs. Do not fabricate beams prior to receiving approved drawings.

c) Provide a revised set of design drawings showing all changes to the bridge. Prepare the drawings using a CAD system. Submit the drawings in Adobe Acrobat Reader (.pdf) format. Include a cover letter signed by the supervising engineer transmitting the finished drawings. In addition, provide the CAD files used to detail the revisions. Upon request, the original design drawings will be made available.

B. Measurement and Payment. The beam and slab shown on the plans will be the configuration measured or calculated for payment. Furnish and install at no cost to the state any additional beam footage, slab concrete or slab reinforcing steel, or substructure concrete or reinforcing steel required because of the use of alternate beam shapes.

36. TURF REINFORCEMENT MAT DRAINAGE CHUTE

A. This work is constructing a turf reinforcement mat drainage chute with treated Douglas Fir boards installed along the base of the guardrail posts.

B. Materials.

1) Furnish 2"x6" treated Douglas Fir boards.

2) Furnish Turf Reinforcement Mat-Natural Fiber Matrix in accordance with Subsection 713.12.

3) Furnish Class I Riprap in accordance with Subsection 701.06.

C. Construction Requirements. Construct in accordance with Detailed Drawing 613-18 and utilizing a method that does not drill holes or otherwise compromise the guardrail posts. Connect the treated boards at the following locations:

1) West of bridge end, Station 8+29 Lt. & Rt.

2) East of bridge end, Station 10+30 Lt. & Rt.

Tie the turf reinforcement mat to the base of the steel guardrail posts as shown in the plans. board. Ensure a tight connection between the new concrete curbing on the bridge and treated

Ensure a watertight connection where all treated boards are connected to each other. Embed treated boards 2-inches below the finished grade elevation of the proposed roadway. Fill gaps with concrete if necessary.

D. Measurement and Payment. Turf Reinforcement will be measured and paid for by the Square Yard.

Riprap Class I will be measured and paid for in accordance with Subsection 613.05.

Payment at the contract unit price is full compensation for all resources necessary to complete the item of work under the contract.

37. REMOVE SIGNS

A. Description. Remove four (4) OM-3 (Object Markers) from the corners of the existing bridge structure. Remove two (2) R12-1 (Weight Limit 12 Tons) from the EB and WB approaches.

B. Measurement. Remove signs are measured per each.

C. Basis of Payment. As noted in the Standard Specifications

D. Quantities: Remove Signs: 6 each

38. TRAFFIC CONTROL DEVICES – PLASTIC DRUMS [618] (REVISED 1-23-20)

Beginning on April 1, 2021, all plastic drums furnished and installed on Interstate projects must include 6-inch retro-reflective white and retro-reflective fluorescent orange sheeting.

Beginning on April 1, 2022, all plastic drums furnished and installed on all projects must include 6-inch retro-reflective white and retro-reflective fluorescent orange sheeting. All other requirements of Detailed Drawing 618-00 still apply.

39. RIPRAP [701] (REVISED 9-23-21)

A. Source Approval. The Department will approve sources for riprap. Furnish riprap from sources that meet the material requirements in Table 1 Riprap Requirements.

1) Test results indicating compliance with Table 1 are mandatory for Department approval of riprap sources.

2) Do not place riprap without source approval.

3) Submit a 100-pound sample of material representative of the riprap source. Crush the sample so that the entire sample passes a 2” sieve. Alternatively, 2” core samples may be submitted.

4) Arrange with the Project Manager for representative samples to be witnessed by the Department at least 30 calendar days before beginning production. Furnish all equipment and labor necessary for the sampling.

B. General. Furnish hard, durable, angular stone that is resistant to weathering and water action and free of organic or other unsuitable material. Angular stone is characterized by sharp, clean edges at the intersections of relatively flat surfaces. Furnish stone that is environmentally safe.

Do not use rounded stone or boulders from a streambed source as riprap. Do not use shale, stone with shale seams, or other fissile or fissured stone that may break into smaller pieces in the process of handling and placing.

The stone must meet the requirements of Table 1.

TABLE 1
Riprap Requirements

Riprap (Class I, II, and III)	
Specific gravity (AASHTO T 85)	2.40 min.
Absorption (AASHTO T 85)	4.0% max
Wear (ASTM C535)	50% max
Gradation (Optical Granulometry)	Table 701-22
Soundness of aggregate using sodium sulfate (AASHTO T 104)	12% loss max
The longest dimension (length) of each stone is no longer than 3 times the shortest dimension (width) of the stone	

Each material source proposed for use as riprap is subject to approval prior to placement. If the riprap source is approved, it may be limited to certain areas, layers, or locations within the source. Approval of the source does not preclude the Department from retesting the material once it is delivered to the project.

Ensure the riprap's placement is uniformly distributed. Acceptance for gradation will be determined by visual analysis and use of optical granulometry software and will be verified in the riprap's final placement location. Prior to final placement the Contractor may request a maximum of 3 courtesy tests of the riprap gradation.

Once in place, and prior to covering or revegetating the riprap, notify the Project Manager for in-place gradation testing.

There are no changes to Subsection 701.06.1 Handlaid Riprap.

Rescind Table 701-21 of the Standard Specifications and replace with Table 2.

TABLE 2
TABLE OF GRADATIONS - RANDOM RIPRAP

Class	Mean Particle Size (inches)	% of Mean Particle Size Passing
I	13	100
	11	70-90
	8	40-60
	3	0-10
II	24	100
	21	70-90
	16	40-60
	7	0-10
III	36	100
	30	70-90
	24	40-60
	9	0-10

END OF SECTION I

MDT NONDISCRIMINATION AND
DISABILITY ACCOMMODATION NOTICE

Montana Department of Transportation ("MDT") is committed to conducting all of its business in an environment free from discrimination, harassment, and retaliation. In accordance with State and Federal law MDT prohibits any and all discrimination and protections are all inclusive (hereafter "protected classes") by its employees or anyone with whom MDT does business:

Federal protected classes	State protected classes
Race, color, national origin, sex, sexual orientation, gender identity, age, disability, income-level & Limited English Proficiency	Race, color, national origin, parental/marital status, pregnancy, childbirth, or medical conditions related to pregnancy or childbirth, religion/creed, social origin or condition, genetic information, sex, sexual orientation, gender identification or expression, ancestry, age, disability mental or physical, political or religious affiliations or ideas, military service or veteran status, vaccination status or possession of immunity passport

For the duration of this contract/agreement, the PARTY agrees as follows:

(1) Compliance with Regulations: The PARTY (hereinafter includes consultant) will comply with all Acts and Regulations of the United States and the State of Montana relative to Non-Discrimination in Federally and State-assisted programs of the U.S. Department of Transportation and the State of Montana, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

(2) Non-discrimination:

a. The PARTY, with regard to the work performed by it during the contract, will not discriminate, directly or indirectly, on the grounds of any of the protected classes in the selection and retention of subcontractors, including procurements of materials and leases of equipment, employment, and all other activities being performed under this contract/agreement.
b. The PARTY will provide notice to its employees and the members of the public that it serves that will include the following:
    i. A statement that the PARTY does not discriminate on the grounds of any protected classes.
    ii. A statement that the PARTY will provide employees and members of the public that it serves with reasonable accommodations for any known disability, upon request, pursuant to the Americans with Disabilities Act as Amended (ADA).
    iii. Contact information for the PARTY's representative tasked with handling non-discrimination complaints and providing reasonable accommodations under the ADA.
    iv. Information on how to request information in alternative accessible formats.

c. In accordance with Mont. Code Ann. § 49-3-207, the PARTY will include a provision, in all of its hiring/subcontracting notices, that all hiring/subcontracting will be on the basis of merit and qualifications and that the PARTY does not discriminate on the grounds of any protected class.

(3) Participation by Disadvantaged Business Enterprises (DBEs):

a. If the PARTY receives federal financial assistance as part of this contract/agreement, the PARTY will make all reasonable efforts to utilize DBE firms certified by MDT for its subcontracting services. The list of all currently certified DBE firms is located on the MDT website at mdt.mt.gov/business/contracting/civil/dbe.shtml

b. By signing this agreement, the PARTY assures MDT that:

The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

c. The PARTY must include the above assurance in each contract/agreement the PARTY enters.

(4) Solicitation for Subcontracts, Including Procurement of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation, made by the PARTY for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the PARTY of the PARTY's obligation under this contract/agreement and all Acts and Regulations of the United States and the State of Montana related to Non-Discrimination.

(5) Information and Reports: The PARTY will provide all information and reports required by the Acts, Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information and its facilities as may be determined by MDT or relevant US DOT Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the PARTY will so certify to MDT or relevant US DOT Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

(6) Sanctions for Noncompliance: In the event of a PARTY's noncompliance with the Non- discrimination provisions of this contract/agreement, MDT will impose such sanctions as it or the relevant US DOT Administration may determine to be appropriate, including, but not limited to:

a. Withholding payments to the PARTY under the contract/agreement until the PARTY complies; and/or

b. Cancelling, terminating, or suspending the contract/agreement, in whole or in part.

(7) Pertinent Non-Discrimination Authorities: During the performance of this contract/agreement, the PARTY, for itself, its assignees, and successor in interest, agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Federal

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21;
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airways Improvement Act of 1982, (49 U.S.C. § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (broadened the scope, coverage, and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975, and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients, and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibits discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 CFR parts 37 and 38;
- The Federal Aviation Administration's Non-Discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which prevents discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English Proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);

- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. § 1681 *et seq.*).

- Executive Order 13672 prohibits discrimination in the civilian federal workforce on the basis of gender identity and in hiring by federal contractors on the basis of both sexual orientation and gender identity.

State

- Mont. Code Ann. § 49-3-205 Governmental services;

- Mont. Code Ann. § 49-3-206 Distribution of governmental funds;

- Mont. Code Ann. § 49-3-207 Nondiscrimination provision in all public contracts.

(8) Incorporation of Provisions: The PARTY will include the provisions of paragraph one through seven in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and/or directives issued pursuant thereto. The PARTY will take action with respect to any subcontract or procurement as MDT or the relevant US DOT Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the PARTY becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the PARTY may request MDT to enter into any litigation to protect the interests of MDT. In addition, the PARTY may request the United States to enter into the litigation to protect the interests of the United States.

SEEDING SPECIAL PROVISIONS

Project No: 8876000 Project Name: Big Porcupine Cr – 14 m E Ingomar
Project length: 0.1 miles CN: 8876000

Area Descriptions	
Area 1	Areas with slopes 3:1 and flatter
Area 2	Areas with slopes steeper than 3:1 or inaccessible to drill seed equipment
Area 3	N/A

1) Topsoil. Salvage and/or furnish sufficient quantities of topsoil in accordance with Subsection 713.05 and/or 610.03.1 of the Standard Specifications to place an average 4-inch loose depth over all disturbed areas and buried riprap. Place the topsoil in accordance with Subsection 203.03.6 of the Standard Specifications immediately following grading. Do not place topsoil on 2:1 or steeper slopes.

2) Fertilizer.

	Nitrogen lbs per acre	P2O5 lbs per acre
Area 1 & 2	10—15	30—35

3) Seedbed preparation and application. Seed all disturbed areas regardless of topsoil placement. Condition all drill seeded areas within 24 hours prior to seeding. Seeding outside the designated seeding period is allowed only with prior approval from MDT's Reclamation Specialist. Following broadcast seeding, rake or scarify the soil to incorporate the seed ¼ to ½ inch.

	Method	Seeding Depth	Season of Seeding
Area 1	Drill Seed	0.25 – 0.5 in	10/1—5/15
Area 2	Dry Broadcast Seed	0.25 – 0.5 in	10/1—5/15

4) Provide the following reclamation seed mix. Use substitute species only if the recommended species is not available and substitution is approved by MDT's Reclamation Specialist.

Area 1			Drill Seeding Rate		
Scientific Name	Common Name	Variety	PLS / sq. ft.	% of Mix	Pounds PLS/ acre
Elymus trachycaulus	Slender wheatgrass	Pryor Revenue or First Strike	6	9	2.0
Pseudoroegneria spicata	Bluebunch wheatgrass	Goldar or Anatone	10	13	3.0
Elymus lanceolatus spp. riparium	Streambank wheatgrass	Sodar	11	14	3.0
Festuca idahoensis	Idaho fescue	Joseph or Nezpurs	10	14	1.0
Bouteloua gracilis	Blue grama	Bird's Eye	9	13	0.5
Nassella viridula	Green needlegrass	Lodorm	8	12	2.0
Achillea millefolium	Western yarrow	Eagle or VNS	6	9	0.1

Gaillardia aristata	Blanketflower	Meriwether	4	6	1.0
Dalea purpurea	Purple prairie clover	Bismarck	7	10	1.0
		GRAND TOTAL	71	100	13.6

Area 2 = Area 1	Broadcast seeding rate is 2X drill seeding rate of Area 1.

5) Furnish the following Rolled Erosion Control products.

Materials	Requirements
Coir fiber Wattle	Furnish 12-inch wattle with 100% coir fiber infill and natural fiber stitching and netting.
Erosion Control Blanket	Furnish a long-term erosion control blanket from the department's QPL.
Coir netting	Furnish coir netting, composed of 100% bristle fiber coir, with a minimum weight of 700 grams per square meter, and a minimum dry MD X CD tensile strength of 1512 X 1032 lbs./ft, and a minimum recommended shear stress of 4.5 feet lbs./sq ft.

a) Following channel bank grading, broadcast seeding and scarification, install three 100% biodegradable erosion control products in combination to prevent soil erosion of the channel banks and buried riprap.

b) Create a 6-inch depression where the coir fiber wattle will sit, at the elevations shown in the plan details.

c) Trench the bottom edge of the erosion control blanket within the coir wattle depression. Overlap all seams a minimum of 6 inches, and all terminal seams a minimum of 12 inches. Install check slots every 25 feet.

d) Overlay the blanket with the coir netting to the same coverage extent and overlap requirements. Trench the combination of materials on the upstream lead edge and downstream trailing edge a minimum of 24 inches.

e) Following placement of erosion control blanket and coir netting, install the coir fiber wattle in the 6-inch depression. Stake the wattle with notched 24-inch wooden stakes through the wattle and the underlying blanket and netting. Stake on 3-foot center.

f) Stake all seams and edges according to manufacturer's recommendations using 12-inch wooden stakes. Install stakes at a 45-degree angle pointed up gradient.

g) Install long term erosion control blanket alone, in one layer where slopes are greater than 3:1, outside of the stream channel.

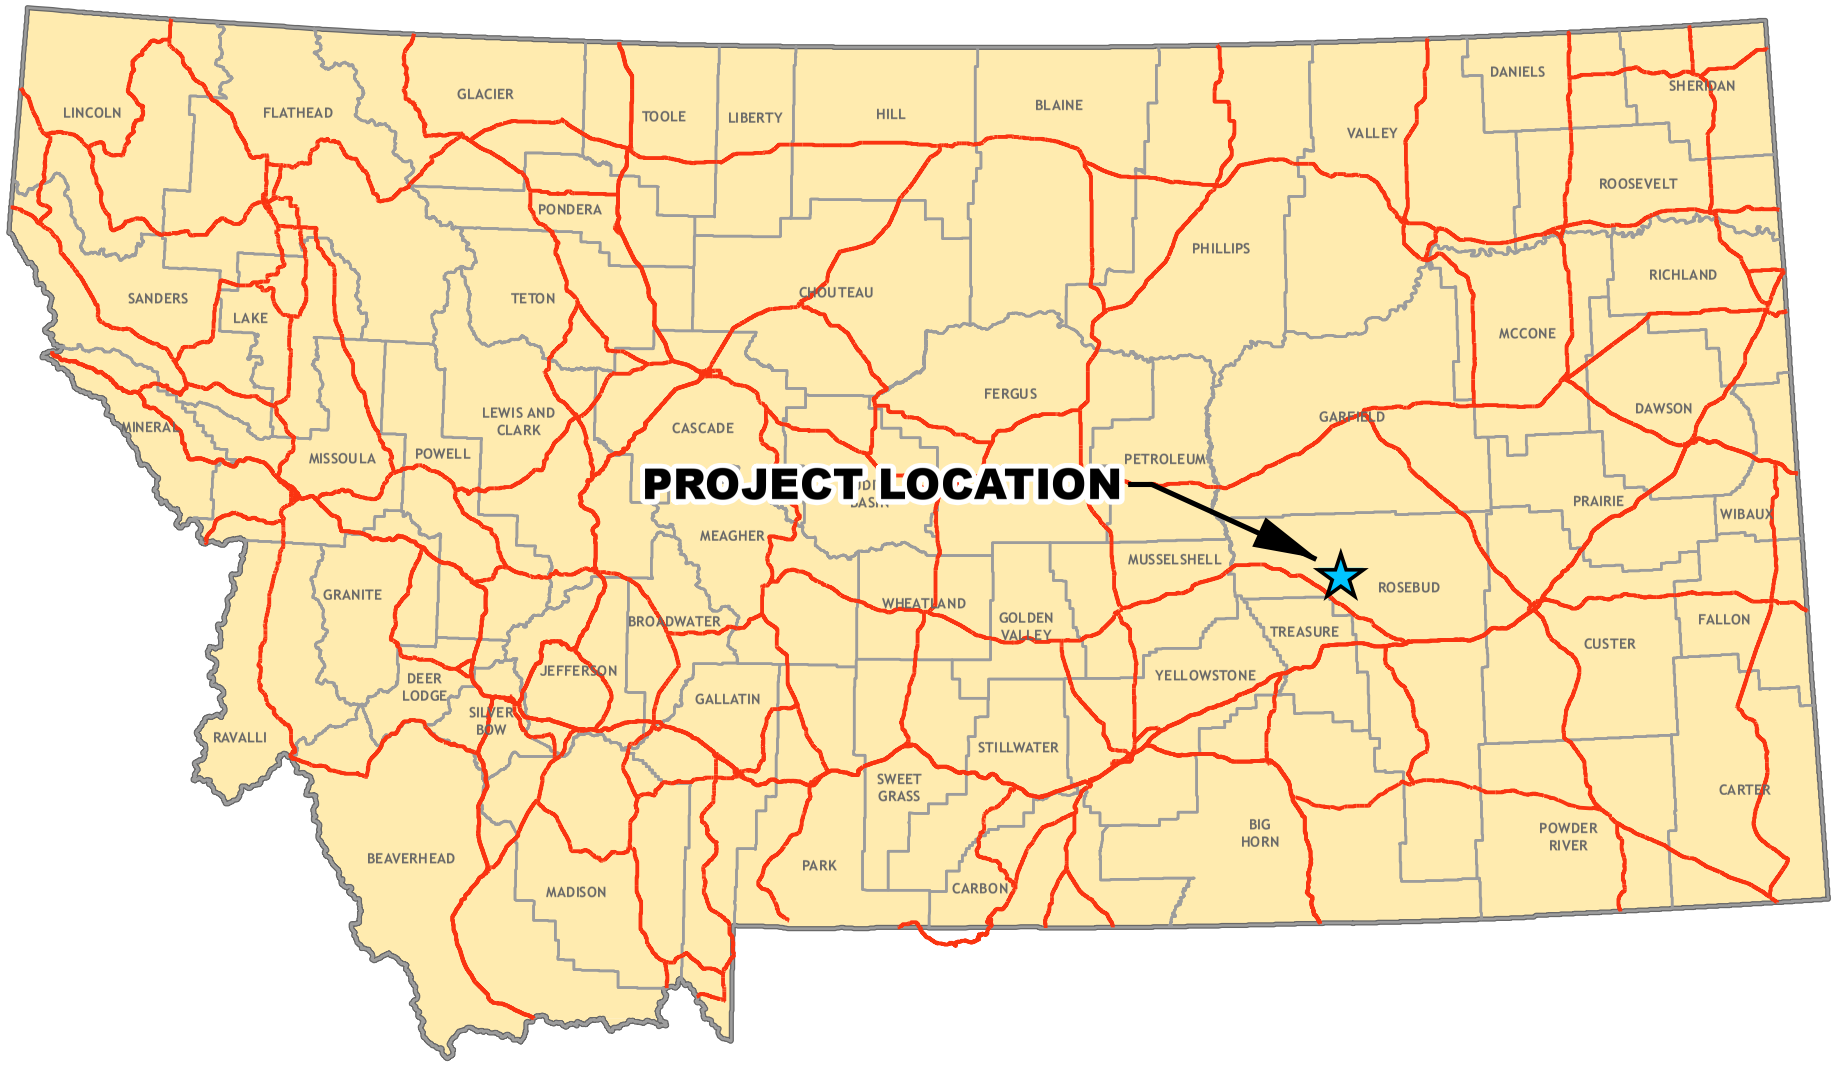
BIG PORCUPINE CR - 14 M E INGOMAR
STPB 9044(31)
BRIDGE REPLACEMENT
CONTROL NUMBER 8876000
PROJECT LOCATION STATE MAP- MONTANA

MONTANA MDT DEPARTMENT OF TRANSPORTATION

N

0 15 30 60
Miles

SECTION II



Page 7 of 16

AWARD COPY

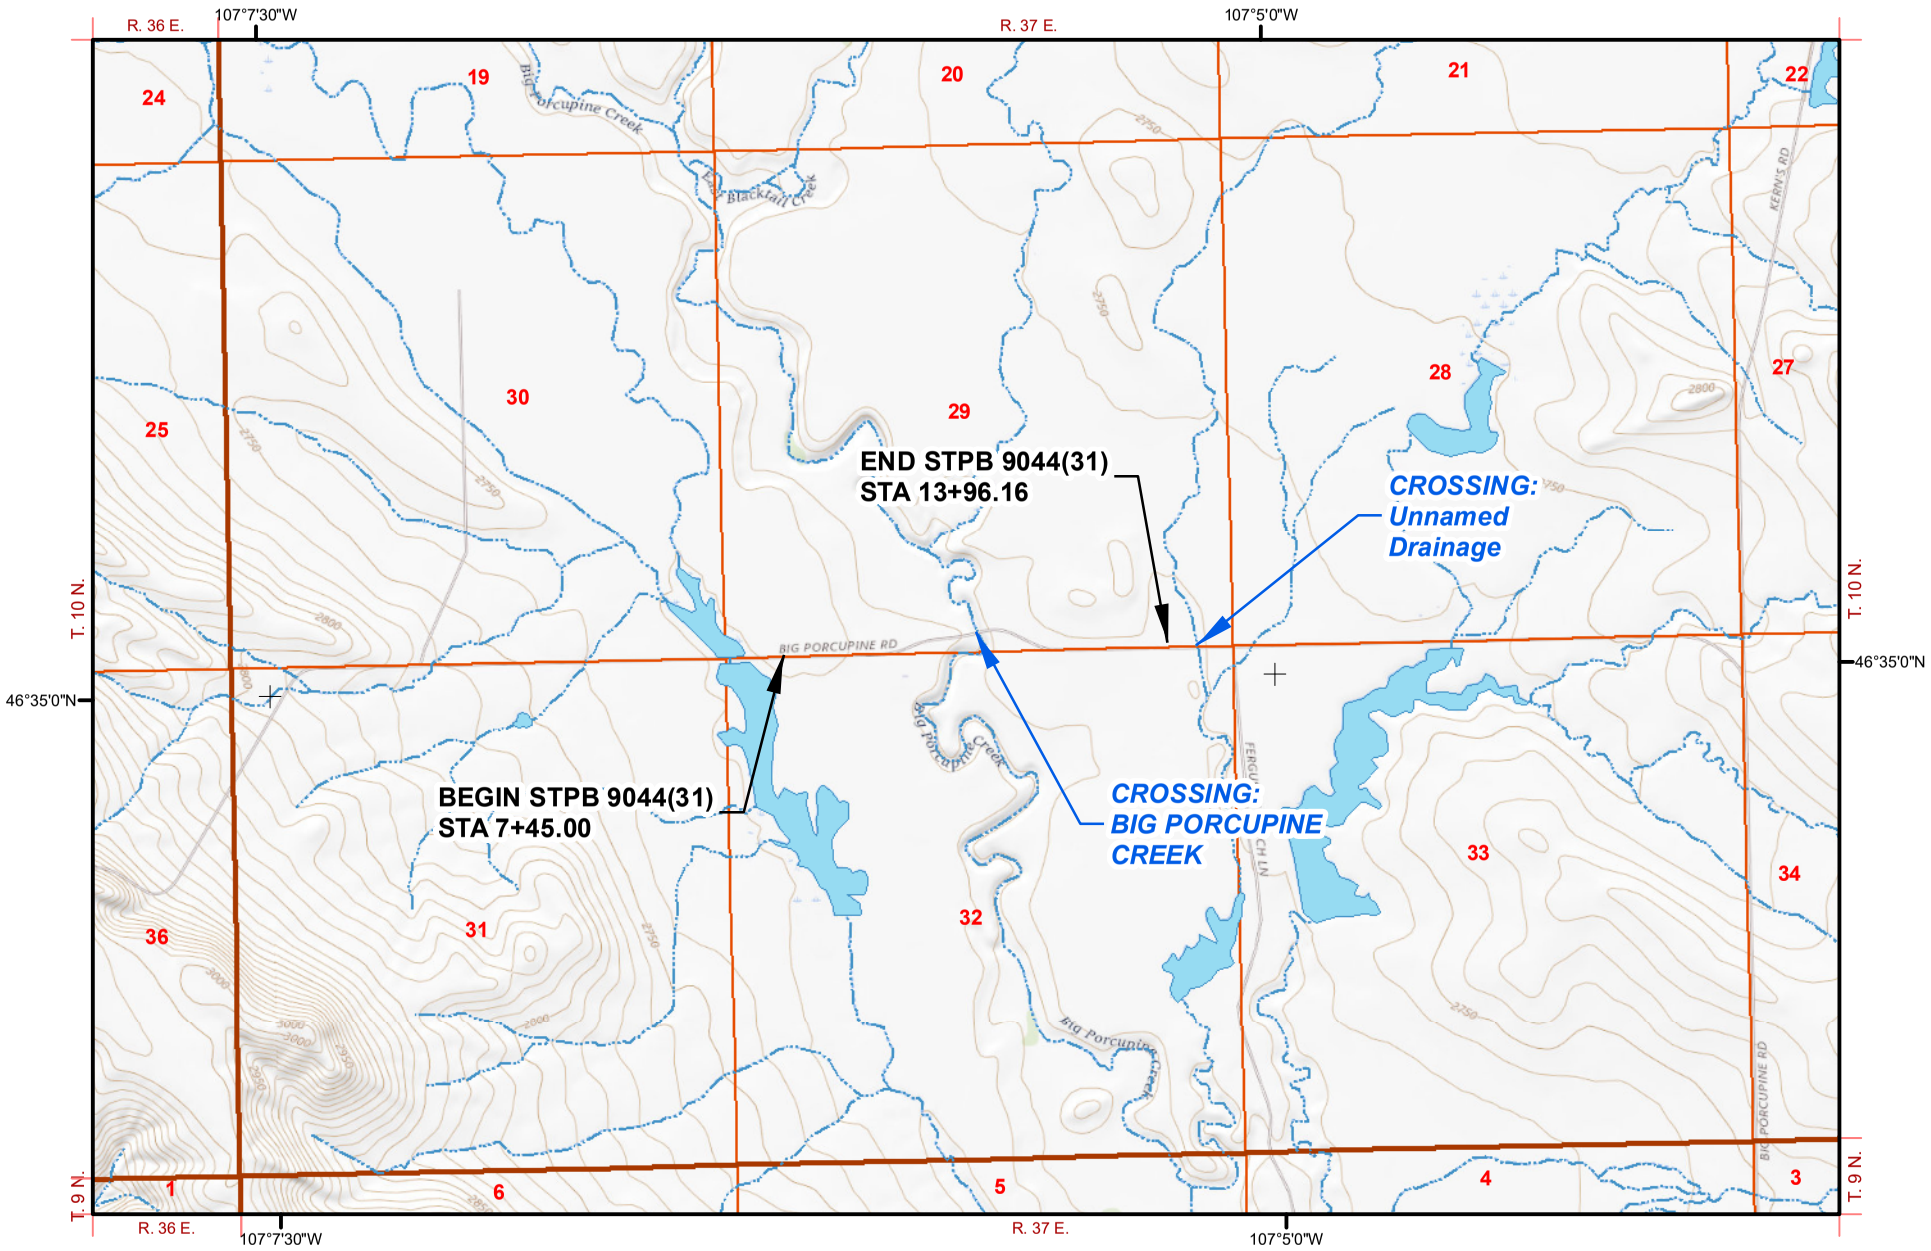
SECTION II

BIG PORCUPINE CR - 14 M E INGOMAR
STPB 9044(31)
BRIDGE REPLACEMENT
CONTROL NUMBER 8876000
PROJECT LOCATION QUAD MAP- ROSEBUD COUNTY

MONTANA MDT DEPARTMENT OF TRANSPORTATION

N

0 500 1,000 2,000
Feet



AWARD COPY

MDT Boring Log Descriptive Terminology

Key to Soil Symbols and Terms

01/18/12

MONTANA MDT DEPARTMENT OF TRANSPORTATION
Geotechnical Section

SOIL CLASSIFICATION CHART

MAJOR DIVISIONS			SYMBOLS GRAPH	SYMBOLS LETTER	TYPICAL DESCRIPTIONS
COARSE GRAINED SOILS (MORE THAN 50% OF MATERIAL IS LARGER THAN NO. 200 SIEVE SIZE)	GRAVEL AND GRAVELLY SOILS (MORE THAN 50% OF COARSE FRACTION RETAINED ON NO. 4 SIEVE)	CLEAN GRAVELS (LITTLE OR NO FINES)		GW	Well-graded gravels, gravel sand mixtures, little or no fines.
				GP	Poorly graded gravels, gravel-sand mixtures, little or no fines.
		GRAVELS WITH FINES (APPRECIABLE AMOUNT OF FINES)		GM	Silty gravels, gravel-sand-silt mixtures.
				GC	Clayey gravels, gravel-sand-clay mixtures.
	SAND AND SANDY SOILS (MORE THAN 50% OF COARSE FRACTION PASSING ON NO. 4 SIEVE)	CLEAN SANDS (LITTLE OR NO FINES)		SW	Well-graded sands, gravelly sands, little or no fines.
				SP	Poorly graded sands, gravelly sands, little or no fines.
		SANDS WITH FINES (APPRECIABLE AMOUNT OF FINES)		SM	Silty sands, sand-silt mixtures.
				SC	Clayey sands, sand-clay mixures.
FINE GRAINED SOILS (MORE THAN 50% OF MATERIAL IS SMALLER THAN NO. 200 SIEVE SIZE)	SILTS AND CLAYS (LIQUID LIMIT LESS THAN 50)			ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity.
				CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays.
				OL	Organic silts and organic silty clays of low plasticity.
	SILTS AND CLAYS (LIQUID LIMIT GREATER THAN 50)			MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
				CH	Inorganic clays of high plasticity, fat clays.
				OH	Organic clays of medium to high plasticity, organic silts.
HIGHLY ORGANIC SOILS				PT	Peat and other highly organic soils.

NOTE: DUAL SYMBOLS ARE USED TO INDICATE BORDERLINE SOIL CLASSIFICATIONS

Order of Descriptors

- Group Name
- Consistency or Relative Density
- Moisture Condition
- Color
- Particle size descriptor(s) (coarse grained soils only)
- Angularity of coarse grained soils
- Other relevant notes

Criteria For Descriptors

Consistency of Fine Grained Soils

Consistency	N-Value (uncorrected)
Very Soft	< 2
Soft	2 - 4
Medium Stiff	5 - 8
Stiff	9 - 15
Very Stiff	16 - 30
Hard	> 30

Apparent Density of Coarse Grained Soils

Relative Density	N-Value (uncorrected)
Very Loose	< 4
Loose	4 - 10
Medium Dense	11 - 30
Dense	31 - 50
Very Dense	> 50

Moisture Condition

Dry	-Absence of moisture, dusty, dry to the touch.
Moist	-Damp, but no visible water.
Wet	-Visible free water.

Definition of Particle Size Ranges

Soil Component	Size Range
Boulder	> 12 in (300 mm)
Cobble	3 in (75 mm) - 12 in (300 mm)
Gravel	No. 4 Sieve (4.75 mm) to 3 in (75 mm)
Sand	No. 200 (0.075 mm) to No. 4 Sieves (4.75 mm)
Silt	< No. 200 Sieve (0.075 mm)*
Clay	< No. 200 Sieve (0.075 mm)*

*Atterberg limits and chart below to differentiate between silt and clay.

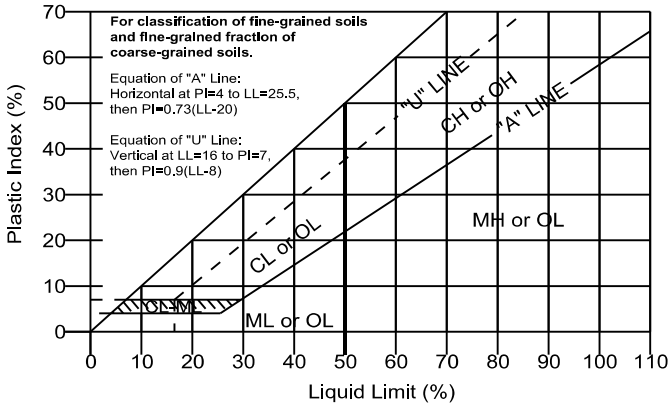
Notes

See Soil Boring Information Special Provision.

SPT (Standard Penetration Test-ASTM D1586):
The number of blows of a 140 lb (63.6 kg) hammer falling 2.5 ft (750 mm) used to drive a 2 in (50 mm) O.D. Split Spoon sampler for a total of 1.5 ft (0.45 m) of penetration.
Written as follows:
first 0.5 ft (0.15 m) - second 0.5 ft (0.15 m) - third 0.5 ft (0.15 m) (ex: 1-3-9)
Note: if the number of blows exceeds 50 before 0.5 ft (0.15 m) of penetration is achieved, the actual penetration rounded to the nearest 0.1 ft (0.03 m) follows the number of blows in parentheses (ex: 12-24-50 (0.09 m), 34-50 (0.4 ft), or 100 (0.3 ft)).WR denotes a zero blow count with the weight of the rods only.
WH denotes a zero blow count with the weight of the rods plus the weight of the hammer.

MC=Moisture Content, LL=Liquid limit, PL=Plastic Limit
-200%=percent soil passing 200 sieve, DD=Dry Density

Soil Classifications are Based on the Unified Soil Classification System, ASTM D2487 and D2488. Also included are the AASHTO group classifications (M145). Descriptions are based on visual observation, except where they have been modified to reflect results of laboratory tests as deemed appropriate.



Angularity of Coarse-Grained Particles

Angular	-Particles have sharp edges and relative plane sides with unpolished surfaces.
Subangular	-Particles are similar to angular description, but have rounded edges.
Subrounded	-Particles have nearly plane sides, but have no edges.
Rounded	-Particles have smoothly curved sides and well-rounded corners and edges.

Example soil description: Sandy FAT CLAY (CH), soft, wet, brown. (A-7)

MDT Boring Log Descriptive Terminology
Key to Rock Symbols and Terms

01/18/12

MONTANA MDT DEPARTMENT OF TRANSPORTATION
Geotechnical Section

Rock Type	Symbol	Rock Type	Symbol	Rock Type	Symbol
Argillite		Dolomite		Quartzite	
Basalt		Gneiss		Rhyolite	
Bedrock (other)		Granitic		Sandstone	
Breccia		Limestone		Schist	
Claystone		Siltstone		Shale	
		Conglomerate			

Order of Descriptors

- Rock Type
- Color
- Grain size (if applicable)
- Stratification/Foliation (as applicable)
- Field Hardness
- Other relevant notes

Criteria For Descriptors
Grain Size

Description	Characteristic
Coarse Grained	-Individual grains can be easily distinguished by eye
Fine Grained	-Individual grains can be distinguished with difficulty

Stratum Thickness

Thickly Bedded	3-10 ft (1-3 m)
Medium Bedded	1-3 ft (300 mm - 1 m)
Thinly Bedded	2-12 in (50-300 mm)
Very Thinly Bedded	< 2 in (50 mm)

Rock Field Hardness


Very Soft	-Can be carved with knife. Can be excavated readily with point of rock hammer. Can be scratched readily by fingernail.
Soft	-Can be grooved or gouged readily by knife or point of rock hammer. Can be excavated in fragments from chips to several inches in size by moderate blows of the point of a rock hammer.
Medium	-Can be grooved or gouged 0.05 in (2 mm) deep by firm pressure of knife or rock hammer point. Can be excavated in small chips to pieces about 1 in (25 mm) maximum size by hard blows of the point of a rock hammer.
Moderately hard	-Can be scratched with knife or pick. Gouges or grooves to 0.25 in (6 mm) can be excavated by hard blow of rock hammer. Hand specimen can be detached by moderate blows.
Hard	-Can be scratched with knife or pick only with difficulty. Hard hammer blows required to detach hand specimen.
Very Hard	-Cannot be scratched with knife or sharp rock hammer point. Breaking of hand specimens requires several hard blows of a rock hammer.

Notes:


UCS = Unconfined Compressive Strength obtained from laboratory testing at the given depth.

See Soil Boring Information Special Provision.

Miscellaneous Soil/Rock Symbols and Terms



Concrete



Asphalt



Water


Boulders and Cobbles


Coal


Fill


Millings


Topsoil

-Soil and Rock descriptions are based on visual observation, except where they have been modified to reflect results of laboratory tests as deemed appropriate.

Explanation of Text Fields in Boring Logs:

Material Description: Lithologic Description of soil or rock encountered.

Remarks: Comments on drilling, including method, bit type, and problems encountered.
Unless stated on logs as being surveyed by district survey, all locations are considered approximate.

General Notes

- Descriptions on these boring logs apply only at the specific boring, and at the time the borings were made. These logs are not warranted to be representative of subsurface conditions at other locations or times.
- Water level observations apply only at the specific boring, and at the time the borings were made. Due to the variability of groundwater measurements given the type of drilling used, and the stratification of the soil in the boring, these logs are not warranted to be representative of groundwater conditions at other locations or times.
- Other terms may be used as descriptors, as defined by the profession.

Operation Types: Auger, Casing Advancer, Core Barrel, Drive Casing

Sample Types: Split Spoon, Shelby, Bulk Sample, Grab Sample, Cone Penetrometer, Vane Shear, Special Samplers, Testpit

Example Rock Log

SANDSTONE, gray, fine grained, thickly bedded, hard field hardness.

Page 2 of 2

MONTANA MDT DEPARTMENT OF TRANSPORTATION

LOG OF BORING

Boring 8876000-1

Project: Big Porcupine Cr - 14M E Ingomar		**Rig:** CME 55 **Hammer:** Auto	**Boring Location** N: 860446.4 ft **Coordinates** E: 2572586.5 ft	**Station:** 8 + 79 **Offset:** 7 ft L
Project Number: STPB 9044(30)	**UPN:** 8876000	**Boring Diameter:** 8"	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 2722.7 ft
Date Started: 10/16/18	**Date Finished:** 10/19/18	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: Childs **Logger:** Jaynes	**Notes:** West side of bridge.			**PLS TRS-QQ:** 10N 37E 29 - DD **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
							BASE COURSE, Poorly-Graded GRAVEL with sand (GP), moist, brown to gray, fine to coarse grained, subrounded to rounded, [A-1].	0.6 2722.1	6						Hollow stem augers with finger bit.
5 2717.7			50		4 - 6 - 4		FILL, Fat CLAY (CH), stiff to medium stiff, moist, light brown, [A-6]. Occasional fine-grained sand and gravel to 3'. Alkali crystals throughout.		13						
			45		4 - 3 - 5				13	51	20	98			
									20						
			40		4 - 5 - 5		Lean CLAY (CL), stiff to medium stiff, moist, light brown, [A-6]. Trace fine-grained sand. Fine roots 7.9'-10.5'.	7.9 2714.8	14 9						
10 2712.7			40		3 - 3 - 3				16						
			45		3 - 2 - 4		Trace fine roots at 13'.		14	35	17	92			
15 2707.7			45		3 - 2 - 3				22						
															VSTA: 931 psf VSTRESID: 439 psf
20 2702.7			95				Lean CLAY (CL), soft, moist to wet, light brown to gray, [A-6]. Occasional thin SILT seams.	19.5 2703.2							
			100		WH - WH - 2		Some organics at 21.5'.		29						
25 2697.7			100				Lean CLAY with sand (CL), soft, wet, light brown to gray, [A-6]. Trace fine-grained sand. Occasional thin SILT layers.	25.8 2696.9	30	30	19	82			

(2) MDT LOG OF BORING - MDT_2016+WELL_V1.GDT - 1/14/19 10:25 - G:\GINT\WPROJECTS\2018+PROJECTS\8876000.GPJ

Water Level Observations		Remarks: Boring caved at 29' after augers/casing removed.
▽ After Drilling: 21.5 ft *(2701.2 ft), Augers In*	▽ During Drilling: 21.3 ft *(2701.4 ft)* ▼ After Drilling:	

MONTANA MDT DEPARTMENT OF TRANSPORTATION

LOG OF BORING

Boring 8876000-1

Project: Big Porcupine Cr - 14M E Ingomar		**Rig:** CME 55 **Hammer:** Auto	**Boring Location** N: 860446.4 ft **Coordinates** E: 2572586.5 ft	**Station:** 8 + 79 **Offset:** 7 ft L
Project Number: STPB 9044(30)	**UPN:** 8876000	**Boring Diameter:** 8"	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 2722.7 ft
Date Started: 10/16/18	**Date Finished:** 10/19/18	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: Childs **Logger:** Jaynes	**Notes:** West side of bridge.			**PLS TRS-QQ:** 10N 37E 29 - DD **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
30 2692.7			100		1 - 2 - 2		Frequent thin fat CLAY (CH) seams 31.5'-37'.		28 25						
35 2687.7			100												
40 2682.7			100 100	87	7 - 15 - 49		Silty MUDSTONE, dark gray to brown, fine grained, very soft to soft field hardness. White gypsum crystals.	40.7 *2682.0*	25 25 14	29	15	92			Switched to HQ3 coring system wtih #3 surface set bit and water.
							Sandy SILTSTONE, light gray, fine grained, medium to soft field hardness. Occasional thin (<2") dark gray, very soft claystone interbeds. Interbeds field classify as fat CLAY (CH).	42.4 *2680.3*					1168	136	
45 2677.7			91	77									1097 1293	134 134	
			100	90											
50 2672.7			100 100	67 0											
			100	68											
			100	0									634 512	130 129	
55 2667.7			96	96									502 425 845	131 129 134	

Water Level Observations

- During Drilling: **21.3 ft** *(2701.4 ft)*
- After Drilling: **21.5 ft** *(2701.2 ft), Augers In*
- After Drilling:

Remarks: Boring caved at 29' after augers/casing removed.

(2) MDT LOG OF BORING - MDT_2016+WELL_V1.GDT - 1/14/19 10:25 - G:\GINTW\PROJECTS\2018+PROJECTS\8876000.GPJ

MONTANA MDT DEPARTMENT OF TRANSPORTATION

LOG OF BORING

Boring 8876000-1

Project: Big Porcupine Cr - 14M E Ingomar		**Rig:** CME 55 **Hammer:** Auto	**Boring Location** N: 860446.4 ft **Coordinates** E: 2572586.5 ft	**Station:** 8 + 79 **Offset:** 7 ft L
Project Number: STPB 9044(30)	**UPN:** 8876000	**Boring Diameter:** 8"	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 2722.7 ft
Date Started: 10/16/18	**Date Finished:** 10/19/18	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: Childs **Logger:** Jaynes	**Notes:** West side of bridge.			**PLS TRS-QQ:** 10N 37E 29 - DD **Abandonment:** Cuttings

Depth (ft) Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
60 2662.7			90	88									1186	136	
													863	135	
													911	134	
			92	70									1162	135	
65 2657.7													1039	137	
													1165	136	
													1123	137	
													1126	136	
			100	102									1345	137	
													1274	136	
70 2652.7								70.5 2652.2							

Boring Depth: 70.5 ft, *Elevation: 2652.2 ft*

Water Level Observations	
After Drilling: **21.5 ft** ***(2701.2 ft), Augers In***	During Drilling: **21.3 ft** ***(2701.4 ft)***
	After Drilling:

Remarks: Boring caved at 29' after augers/casing removed.

(2) MDT LOG OF BORING - MDT_2016+WELL_V1.GDT - 1/14/19 10:25 - G:\GINTW\PROJECTS\2018+PROJECTS\8876000.GPJ

MONTANA MDT DEPARTMENT OF TRANSPORTATION

LOG OF BORING

Boring 8876000-2

Project: Big Porcupine Cr - 14M E Ingomar		**Rig:** CME 55 **Hammer:** Auto	**Boring Location** N: 860454.6 ft **Coordinates** E: 2572656.9 ft	**Station:** 9 + 49 **Offset:** 3 ft R
Project Number: STPB 9044(30)	**UPN:** 8876000	**Boring Diameter:** 8"	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 2724.2 ft
Date Started: 10/23/18	**Date Finished:** 10/24/18	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: Childs **Logger:** Jaynes	**Notes:** East side of bridge.			**PLS TRS-QQ:** 10N 37E 29 - DC **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
							BASE COURSE, Poorly-Graded GRAVEL with sand (GP), moist, brown, fine to coarse grained, subrounded to rounded, [A-1].	0.6 / 2723.6	3						Hollow stem augers with finger bit.
			35		4 - 4 - 5		FILL, Sandy Lean CLAY (CL), stiff to medium stiff, moist, light brown to brown, [A-6]. Some fine to medium grained sand and gravel. Frequent wood chunks.		14						
5 / 2719.2			40		3 - 4 - 3				14						
			40		3 - 4 - 4		Lean CLAY (CL), medium stiff to stiff, moist, brown, [A-6]. Occasional roots. Trace fine-grained sand.	6.0 / 2718.2	15						
10 / 2714.2			70				Large wood chunks in cuttings 9.5'-12'.		15 12 13	34	17	86			
			50		2 - 3 - 3				16						VSTA: 1587 psf VSTRESID: 389 psf
15 / 2709.2			100				SILT with sand (ML), soft, moist, light brown to gray, [A-4]. Trace fine-grained sand and roots.	14.5 / 2709.7	19 20	26	23	82			
			100		3 - 2 - 2		Lean CLAY (CL), soft, moist, brown to gray, [A-6]. Trace fine-grained sand.	17.0 / 2707.2	24						
20 / 2704.2			100		WH - 2 - 2				25						
							Fat CLAY with sand (CH), stiff, moist to wet, brown to gray, [A-7]. Occasional silty fine-grained sand seams.	22.0 / 2702.2						VSTA: 1620 psf VSTRESID: 528 psf
25 / 2699.2			100		WH - WH - 2		Lean CLAY (CL), soft, moist, brown to gray, [A-6].	25.0 / 2699.2	22	28	17	94			VSTA: 1687 psf VSTRESID: 514 psf

Water Level Observations

- During Drilling: **23.8 ft** ***(2700.4 ft)***
- After Drilling: **26.7 ft** ***(2697.5 ft), Casing In***
- After Drilling: **19.5 ft** ***(2704.7 ft) +10 hrs, Casing In***

Remarks: Boring caved at 31.8' after augers/casing removed.

(2) MDT LOG OF BORING - MDT_2016+WELL_V1.GDT - 1/14/19 10:25 - G:\GINTW\PROJECTS\2018+PROJECTS\8876000.GPJ

MONTANA MDT DEPARTMENT OF TRANSPORTATION

LOG OF BORING

Boring 8876000-2

Project: Big Porcupine Cr - 14M E Ingomar		**Rig:** CME 55 **Hammer:** Auto	**Boring Location** N: 860454.6 ft **Coordinates** E: 2572656.9 ft	**Station:** 9 + 49 **Offset:** 3 ft R
Project Number: STPB 9044(30)	**UPN:** 8876000	**Boring Diameter:** 8"	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 2724.2 ft
Date Started: 10/23/18	**Date Finished:** 10/24/18	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: Childs **Logger:** Jaynes	**Notes:** East side of bridge.			**PLS TRS-QQ:** 10N 37E 29 - DC **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
30 2694.2			90		6 - 34 - 24		Silty, Sandy MUDSTONE, brown to dark gray, fine grained, very soft to soft field hardness. Limestone cobble 30.3'-30.8'.	29.0 2695.2	24						
35 2689.2			100		25 - 50/0.3ft		Sandy SILTSTONE, light gray, fine grained, medium to soft field hardness. Occasional thin (<2") dark gray, very soft claystone interbeds. Interbeds field classify as fat CLAY (CH).	35.0 2689.2	11				869	134	Switched to HQ3 coring system wtih #3 surface set bit and water.
			95	87									958	134	
													997	133	
40 2684.2													787	132	
			98	80									905	134	
													840	135	
45 2679.2															
			100	79									724	131	
													669	132	
50 2674.2													668	131	
			94	88											
55 2669.2															
			100	86									642	131	

Water Level Observations		Remarks: Boring caved at 31.8' after augers/casing removed.
After Drilling: 26.7 ft (2697.5 ft), Casing In	During Drilling: 23.8 ft (2700.4 ft) After Drilling: 19.5 ft (2704.7 ft) +10 hrs, Casing In	

(2) MDT LOG OF BORING - MDT_2016+WELL_V1.GDT - 1/14/19 10:25 - G:\GINTW\PROJECTS\2018+PROJECTS\8876000.GPJ

MONTANA MDT DEPARTMENT OF TRANSPORTATION

LOG OF BORING

Boring 8876000-2

Project: Big Porcupine Cr - 14M E Ingomar		**Rig:** CME 55 **Hammer:** Auto	**Boring Location** N: 860454.6 ft **Coordinates** E: 2572656.9 ft	**Station:** 9 + 49 **Offset:** 3 ft R
Project Number: STPB 9044(30)	**UPN:** 8876000	**Boring Diameter:** 8"	**System:** MT S.P. (E) **Datum:** NAD83	**Ground Elevation:** 2724.2 ft
Date Started: 10/23/18	**Date Finished:** 10/24/18	**Drilling Fluid:** None	**Location Source:** Surveyed	**Elevation Source:** Surveyed
Driller: Childs **Logger:** Jaynes	**Notes:** East side of bridge.			**PLS TRS-QQ:** 10N 37E 29 - DC **Abandonment:** Cuttings

Depth (ft) / Elev. (ft)	Operation	Sample Type	Recovery (%)	RQD (%)	Blow Count	Lithology	Material Description	Depth (ft) / Elev. (ft)	MC (%)	LL	PL	-200 (%)	Qu (psi)	DD (pcf)	Remarks and Other Tests
60 *2664.2*			100	95									1485 1523	137 138	
								64.5 *2659.7*							

Boring Depth: 64.5 ft, *Elevation: 2659.7 ft*

Water Level Observations		Remarks
After Drilling: **26.7 ft** ***(2697.5 ft), Casing In***	During Drilling: **23.8 ft** ***(2700.4 ft)***	Remarks: Boring caved at 31.8' after augers/casing removed.
	After Drilling: **19.5 ft** ***(2704.7 ft) +10 hrs. Casing In***	

(2) MDT LOG OF BORING - MDT_2016+WELL_V1.GDT - 1/14/19 10:25 - G:\GINTW\PROJECTS\2018+PROJECTS\8876000.GPJ

STANDARD PROVISIONS INDEX

FEDERAL AID PROJECTS CONTAINS

Federal Wage Rates (Rev. 1-7-2022)..... 9 Pages

Requirements & Acknowledgement for Working on Railroad R/W ..... 1 Page

Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Rev.5-1-2012]..... 12 Pages

Supplemental Revisions for Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Added 2-4-2016] ..... 1 Page

EEO Affirmative Action Req. on Federal-Aid Construction ..... 1 Page

General Decision Number: MT20220079 01/07/2022

Superseded General Decision Number: MT20210079

State: Montana

Construction Type: Highway

Counties: Montana Statewide.

HIGHWAY CONSTRUCTION PROJECTS

Note: Contracts subject to the Davis-Bacon Act are generally required to pay at least the applicable minimum wage rate required under Executive Order 14026 or Executive Order 13658. Please note that these Executive Orders apply to covered contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but do not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60).

If the contract is entered into on or after January 30, 2022, or the contract is renewed or extended (e.g., an option is exercised) on or after January 30, 2022, Executive Order 14026 generally applies to the contract. The contractor must pay all covered workers at least $15.00 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on that contract in 2022.

If the contract was awarded on or between January 1, 2015, and January 29, 2022, and the contract is not renewed or extended on or after January 30, 2022, Executive Order 13658 generally applies to the contract. The contractor must pay all covered workers at least $11.25 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on that contract in 2022.

The applicable Executive Order minimum wage rate will be adjusted annually. If this contract is covered by one of the Executive Orders and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must still submit a conformance request.

Additional information on contractor requirements and worker protections under the Executive Orders is available at www.dol.gov/whd/govcontracts.Modification Number

Publication Date

0 01/07/2022

* SUMT2014-001 02/19/2014

	Rates	Fringes
CARPENTER		
Carpenter/Piledriverman	$ 29.00	11.82
Millwright	$ 32.00	11.82

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Carpenter zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

CEMENT MASON/CONCRETE FINISHER...$ 24.87 10.80

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Cement Mason/Concrete Finisher zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

DIVER

Diver Tender.....$ 37.16 14.52
Diving.....$ 76.32 14.52
Stand-By.....$ 38.16 14.52
The tender shall receive 2 hours at the straight time pay rate per shift for dressing and/or undressing a Diver when work is done under hyperbaric conditions.

Depth Pay (Surface Diving):

0-20 ft.: Free zone
>20-100 ft.: $2.00 per ft.
>100-150 ft.: $3.00 per ft.
>150-220 ft.: $4 00 per ft.
>220 ft.: $5.00 per ft.
Diving in Enclosures (Diver Only):

0-25 ft.: Free zone
>25-300 ft.: $1.00 per ft.

DIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN (LINE CONSTRUCTION)

Equipment Operator.....$ 33.27 14.16
Groundman.....$ 25.98 13.25
Lineman.....$ 43.43 15.38

TRAVEL PAY:

$50.00 per day - 0-25 Miles from the County Courthouse of the following cities: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, and Missoula.

$60.00 per day - Over 25 Miles

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN

All Areas.....$ 32.74 13.42

TRAVEL PAY:

Zone 1: 0 to 10 miles - Free
Zone 2: 10 to 60 miles - Federal mileage both ways/day
Zone 3: Over 60 miles - $75.00 per day

The Electrician zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

IRONWORKER.....$ 27.25 20.98

TRAVEL PAY:

0 to 45 miles - Free
45-85 miles - $55.00 per day

Over 85 miles - $85.00 per day

The Ironworker zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base + $2.50
Zone 3: Over 50 miles - Base + $3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

LABORER

Group 1.....	$ 20.90	9.60
Group 2.....	$ 23.97	9.60
Group 3.....	$ 24.19	9.60
Group 4.....	$ 25.18	9.60

GROUP 1: Flag Person

GROUP 2: All General Labor work; Burning Bar; Bucket Man; Carpenter Tender; Caisson Worker; Cement Mason Tender; Cement Handler (dry); Chuck Tender; Choker Setter; Concrete Worker; Curb Machine-Lay Down; Crusher and Batch Plant Worker; Fence Erector; Form Setter; Form Stripper; Heater Tender; Landscaper; Pipe Wrapper; Pot Tender; Powderman Tender; Rail and Truck Loaders and Unloaders; Riprapper; Sealants for Concrete and other materials; Sign Erection, Guard Rail and Jersey Rail; Stake Jumper; Spike Driver; Signalman; Tail Hose man; Tool Checker and Houseman; Traffic Control Worker.

GROUP 3: Concrete Vibrator; Dump man (Grade man); Equipment Handler; Geotextile and Liners; High-Pressure Nozzleman; Jackhammer (Pavement Breaker); Laser Equipment; Non-riding Rollers; Pipelayer; Posthole Digger (power); Power Driven Wheelbarrow; Rigger; Sandblaster; Sod-Cutter-power; Tampers

GROUP 4: Asphalt Raker; Cutting Torch; Grade Setter; High-Scaler; Power Saws (Faller & Concrete); Powderman ($1.00 per hour above Group 4 rate); Rock & Core Drill; Track or Truck Mounted Wagon Drill; Welder including Air Arc

LABORERS ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

PAINTER (Pavement Marking/Milling and related work. Includes operating marking and all other equipment and all work involved in application of pavement markings including epoxies, paints, tape, buttons, thermo-plastics, and any other products applied for traffic marking purposes and for directing and regulating traffic and cutting rumble strips) .....$ 28.00 10.30

PAINTER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

POWER EQUIPMENT OPERATOR:

Group 1.....$ 26.52 10.40
Group 2.....$ 28.55 10.40
Group 3.....$ 29.41 10.40
Group 4.....$ 30.10 10.40
Group 5.....$ 31.44 10.40
Group 6.....$ 32.13 10.40
Group 7.....$ 34.23 10.40

GROUP 1: Air Compressor; Auto Fine Graders; Belt Finishing Machine; Boring Machine (small); Cement Silo; Crane, A-Frame Truck Crane; Crusher Conveyor; DW-10, 15, and 20 Tractor Roller; Farm Tractor; Forklift; Form Grader; Front End Loader Under 1 CU Yard; Heavy Duty Drills; Herman Nelson Heater; Mulching Machine; Oiler, All Except Cranes & Shovels; Pumpman.

GROUP 2: Air Doctor; Backhoe/Excavator/Shovel to and including 3 CU Yard; Bit Grinder; Bituminous Paving Travel Plant; Boring Machine Large; Broom, Self-Propelled; Concrete Travel Batcher; Concrete Float & Spreader; Concrete Bucket Dispatcher; Concrete Finish Machine; Concrete Conveyor; Distributor; Dozer; Rubber-Tired, Push & Side Boom; Elevating Grader/Gradall; Field Equipment Serviceman; Front End Loader 1 CU Yard to including 5 CU Yard; Grade Setter; Heavy Duty Drills, All Types; Hoist/Tugger, All; Hydralift & Similar; Industrial Locomotive; Motor Patrol, Except Finish; Mountain Skidder; Oiler - Cranes & Shovels; Pavement Breaker, EMSCO; Power Saw, Self-Propelled; Pugmill; Pumpcrete/Grout Machine; Punch Truck; Roller, Other Than Asphalt; Roller, Sheepsfoot, Self-Propelled; Roller, 25 Tons and Over; Ross Carrier; Rotomill Under 6 Ft; Trenching Machine; Washing/Screening Plant.

GROUP 3: Asphalt Paving Machine; Asphalt Screed; Backhoe/Excavator/Shovel Over 3 CU Yard; Cableway Highline; Concrete Batch Plant; Concrete Curing Machine; Concrete Pump; Cranes; Creter; Cranes, Electric Overhead; Cranes 24 Tons and Under; Curb Machine/Slip Form Paver; Finish Dozer; Front End Loader Over 5 CU Yard; Mechanic/Welder; Pioneer Dozer; Roller Asphalt (Breakdown & Finish); Rotomill Over 6 FT; Scraper, Single, Twin or Pulling Belly Dump; Yo-Yo Cat.

GROUP 4: Asphalt/Hot Plant Operator, Cranes, 25 Tons to 44 Tons; Crusher Operator; Finish Motor Patrol; Finish Scraper.

GROUP 5: Cranes, 45 Tons to Including 74 Tons.

GROUP 6: Cranes, 75 Tons to Including 149 Tons; Crane, Whirley (All).

GROUP 7: Cranes, 150 Tons to Including 250 Tons (Add $ 1.00 For Every 100 Tons Over 250 Tons; Crane, Tower (All).

POWER EQUIPMENT OPERATOR ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

TRUCK DRIVER

Group 1.....$ 22.39 10.16
Group 2.....$ 28.06 10.16

GROUP 1: Pilot Car

GROUP 2: Combination Truck and Concrete Mixer and Transit Mixer; Dry Batch Trucks; Distributor Driver; Dump man; Dump Trucks and Similar Equipment; Dumpster; Flat Trucks; Lumber Carriers; Lowboys; Pickup; Powder Truck Driver; Power Boom; Serviceman; Service Truck/Fuel Truck/ Tire person; Truck Mechanic; Trucks with Power Equipment; Warehouseman, Parts man, Cardex and Warehouse Expeditor; Water Trucks.

TRUCK DRIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles – Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50

ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury, or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of ""identifiers"" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers:

A four-letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than ""SU"" or ""UAVG"" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers:

Classifications listed under the ""SU"" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers:

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those

classifications: however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can

be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations.

Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor

200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7).

Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board).

Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

Effective 02-10-22

"CONTRACTOR REQUIREMENTS AND ACKNOWLEDGMENT FOR WORKING ON RAILROAD RIGHT-OF-WAY"

This document must be dated and signed by the Contractor and submitted to the State before occupying or working on Railroad right-of-way.

1) No change, which has a direct effect on the Railroad, will be made to construction plans without submitting revised plans and receiving approval from the Railroad. Work covered by the plans, that requires flagging, will be covered by the Railroad/Highway Agreement. For work that is a result of the contractor's discretion, flagging protection will be required when equipment crosses or is working within 25 feet (7.62 meters) of center of any live track. When deemed necessary by local Railroad officers, a flagman may be required at all times while working on Railroad right-of-way in high density rail traffic area.

2) Crossing of any Railroad tracks must be done at approved locations and must be full depth timber, rubber, etc. Any equipment with steel wheels, lugs or tracks must not cross steel rails without the use of rubber tires or other approved protection. This shall apply specifically to, but not be limited to, access for Contractor furnished gravel, borrow or waste sites. The Contractor will be required to obtain a permit from the Railroad, and comply with any provisions thereof, before using any private Railroad crossings. All track crossing locations must be covered by a Private Roadway and Crossing Agreement. This does not apply to any public crossing.

3) Costs of flagging or planking protection of the tracks, which are a direct result of the planned construction, will be paid for by the State. Costs of flagging, planking for protection of the tracks, installation of new crossings or other work caused by the Contractor's discretion, will be paid by the Contractor.

4) When work to be performed by the Contractor is not covered in the Railroad/Highway agreement, the Contractor must furnish a plan to the Railroad for approval showing details as to how any work that may affect the Railroad will be accomplished.

5) Storing of construction materials or any other material, including dirt, sand, etc., within the Railroad right-of-way, will not be allowed unless covered by an easement, construction permit, or Contractor's permit/lease.

6) Construction within 25 feet (7.62 meters) of the center of any track not covered by the Railroad/Highway agreement will require plan approval and authorization by the Railroad Superintendent Maintenance and Engineering. This includes, but is not limited to, any excavation, slope work and driving of sheet piling.

7) No vehicles, equipment or machines shall be parked or stored unattended within 25 feet (7.62 meters) of any track, on railroad right-of-way, without specific written approval of the Railroad.

8) When any work is to be performed on Railroad property by the Contractor that is not shown in the construction plans, the Contractor must submit a detailed plan of the work to the Railroad for their approval.

CONTRACTOR'S ACKNOWLEDGMENT:

_____
Company

By: _____
Name

_____
Title

_____
Date

WORK SITE LOCATION:

_____
Town

_____
State

_____
Project #

Rev. 01/01/04

FHWA-1273 -- Revised May 1, 2012

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Nonsegregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Compliance with Governmentwide Suspension and Debarment Requirements
XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 “Contract provisions and related matters” with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH–1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b.(1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of $10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
(2) the prime contractor remains responsible for the quality of the work of the leased employees;
(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1**. Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. “First Tier Covered Transactions” refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. “First Tier Covered Transactions” refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

Supplemental Revisions for FHWA Form-1273 (Dated May 1, 2012)
Required Contract Provisions
Federal-Aid Construction Contracts

The following are supplementary or amendatory to the May 1, 2012, FHWA Form-1273 insofar as they apply to this contract:

Add the following provisions in accordance with the FHWA memo dated December 11, 2015:

Utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.

Furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in above paragraph to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

SPECIAL PROVISIONS
Rev. 3-15-02
EEO AFFIRMATIVE ACTION REQUIREMENTS ON
FEDERAL & FEDERAL-AID CONSTRUCTION CONTRACTS

Federal-aid contractors are hereby notified they are subject to the OFCCP goals and timetables for minority and female participation expressed below. Compliance with the goals and OFCCP affirmative action efforts for contracts and subcontracts consisting of $10,000 or more will be determined by OFCCP officials.

APPENDIX A

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246)

1. The Offeror's or Bidder's attention is called to the Equal Opportunity Clause and "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

GOALS FOR FEMALE PARTICIPATION EACH TRADE	6.9%
TIMETABLES	GOALS FOR MINORITY PARTICIPATION IN EACH TRADE
153 Great Falls, MT	
SMSA (Standard Metropolitan Statistical Area) Counties	
3040 Great Falls, MT	3.2%
Cascade County	
Non-SMSA Counties	4.1%
Blaine, Broadwater, Chouteau, Fergus, Glacier, Hill, Jefferson, Judith Basin, Lewis & Clark, Liberty, Meagher, Petroleum, Phillips, Pondera, Teton, Toole, Valley, Wheatland	
154 Missoula, MT	
Non-SMSA Counties	2.7%
Beaverhead, Deer Lodge, Flathead, Granite, Lincoln, Madison, Mineral, Lake Missoula, Powell, Ravalli, Sanders, Silver Bow	
155 Billings, MT	
SMSA Counties	
0880 Billings, MT	3.3%
Yellowstone County	
Non-SMSA Counties	3.3%
Big Horn, Carbon, Carter, Custer, Dawson, Fallon, Gallatin, Garfield, Golden Valley, McCone, Musselshell, Park, Powder River, Prairie, Rosebud, Stillwater, Sweet Grass, Treasure, Wibaux, Yellowstone Nat'l Park	
Non-SMSA Counties	
Daniels, Sheridan, Richland, Roosevelt	4.4%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of $10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.