STATE OF MONTANA
DEPARTMENT OF TRANSPORTATION
BID PACKAGE

Sealed bids for construction of this project will be received by the Montana Department of Transportation, Construction Contracting Bureau, Room 101, 2701 Prospect, Helena, Montana until 9:00 a.m. on March 24, 2022. All bids will then be publicly opened, reviewed for correctness, and then publicly read.

Federal Aid Project(s):

HSIP 15-5(143)278 SF 169 I-15 High Tension Cable Rail

Bid proposals, Plans, Standard Specifications, Detail Drawings, and Standard Contract Forms are on file for examination and may be obtained from the Construction Contracting Bureau of the Montana Department of Transportation, 2701 Prospect Avenue, P.O. Box 201001, Helena, Montana 59620-1001.

Prime bidders use the Electronic Bid System or bid on-line through Bid Express to produce a bid containing Proposal Forms, Schedule of Items, and Disadvantaged Business Enterprises (DBE) Requirements (if applicable).

CONTRACT # 05322
AWARDED ON: APRIL 5, 2022
TO: POTEET CONSTRUCTION INC.

MONTANA DEPARTMENT OF TRANSPORTATION

Loran Frazier, Chairperson
Montana Transportation Commission

Malcolm “Mack” Long
Director of Transportation

Contract No.05322
PB:ST:9376000AWD-203

CONTRACT NO. 05322

Montana Department of Transportation
Construction Contracting Bureau

Date(s) Issued:
March 22, 2022

A D D E N D U M

For The Following Project(s)
To Be Let On:
March 24, 2022

203 – SF 169 I-15 High Tension Cable Rail
HSIP 15-5(143)278

ADDENDUM NO. 1
ATTACHMENT NO. 1

REVISED SCHEDULE OF ITEMS
Changing quantity for Item #:
Delete bid item#
104 030 011 Miscellaneous Items-LS

INSTRUCTIONS – READ CAREFULLY

Load the electronic amendment file while in the opened project file to apply the addendum. In order to be responsive, the Schedule of Items printout on projects with addendums must show the addendum(s) applied at the bottom of each page.

Revised documents supersede and replace the documents you now have. New documents supplement the documents you now have. Make the necessary changes in your bidding documents.

Miki Lloyd

Miki Lloyd, Section Supervisor
Construction Contracting Bureau

CURRENT QUESTIONS & ANSWERS

203 - SF 169 I-15 HIGH TENSION CABLE RAIL - March 24, 2022

Notifications

No Notices available for this project.

Addendums

-1-

Submitted: Tuesday 22-MAR-2022 12:55 PM

An Addendum has been posted for this project: **ADDENDUM**

To download the addendum bid files, click here: **BID FILES**

Clarifications

-1-

Submitted: Thursday 03-MAR-2022 02:21 PM

The Federal Wage Rates (dated 1-7-2022) located in Section III, are hereby rescinded and replaced with the new Federal Wage Rates dated 2-25-2022. **FEDERAL WAGE RATES** (see end of Q&A)

-2-

Submitted: Thursday 03-MAR-2022 02:47 PM

The CEI on this project does not require a trailer on site. Special Provision # 16 CEI Additional Requirements and related Bid item # 104 030 011 Miscellaneous Items-LS are hereby deleted from this contract. An Addendum will be issued.

-3-

Submitted: Friday 04-MAR-2022 08:52 AM

Special Provision #23 High Tension Cable Barrier Rail has been revised to reflect the Contractor performing the field staking of all terminal section installations. **REVISED SPECIAL PROVISION 23-C** (see end of Q&A)

-4-

Submitted: Thursday 17-MAR-2022 07:56AM

Below are two statements of clarification for consideration:

1. Provide a cable rail system that meets the criteria for 6:1 slopes. Some median slopes may not meet the 6:1 requirement. Grading quantities are included for minor locations where the rail crosses median centerline and for terminal sections. Grading is not intended for sliver fills to meet the 6:1 slope requirement.
2. The 10’ deflection criteria is based on Test 3-11.

Questions

-1-

Submitted: Monday 28-FEB-2022 08:42 AM

Company: Coral Construction Company

Contact: Kris Karpstein

The Special Provision Section 23. High Tension Cable Barrier Section B, Third Bullet calls for a maximum deflection of 10 feet with a maximum post spacing of 16.5'. However, Plan Sheet 5 Note 1 talks about a Maximum Dynamic Deflection of 9' or less. Please confirm which deflection requirement is needed for the project.

CURRENT QUESTIONS & ANSWERS

Answer
Submitted: Thursday 03-MAR-2022 09:30 AM
Provide a system with a maximum deflection of 10 feet and a maximum post spacing of 16.5 feet. Note 1 is hereby removed from Plan Sheet 5. The revised plan sheet is attached. **PLAN SHEET 5**

-2-
Submitted: Monday 28-FEB-2022 11:53 AM
Company: Poteet Construction
Contact: Gary Pfister
1) There is no bid item for the cable rail terminal sections. Does the Department plan to add one?
2) Is there any Geotech information available for this project?
Answer
Submitted: Thursday 03-MAR-2022 07:00 AM
No, a cable rail terminal section bid item will not be added to the contract. The number of terminal sections is dependent on what cable rail manufacturer the contractor chooses. Cable rail terminal sections are measured and paid for in the HIGH-TENSION CABLE RAIL bid item. No Geotech information is available for the project.

-3-
Submitted: Tuesday 01-MAR-2022 02:48 PM
Company: Poteet Construction
Contact: Gary Pfister
1) Will MDT accept the Brifen TL-3 “O” Post MASH cable guardrail system for use on this project?
2) Will MDT allow a time extension/extended completion date based on material availability?
3) Can MDT provide details/quantities by location for embankment and topsoil placement?
Answer
Submitted: Thursday 03-MAR-2022 08:15 AM
1) The system would be accepted provided it meets all the requirements outlined in the contract.

2) If the contractor shows due diligence in ordering materials and can clearly demonstrate schedule impacts caused by material availability, MDT will allow a time extension in accordance with section 108.07.5.

3) Embankment In-Place and Topsoil quantities are approximate and are dependent on what Cable Rail system the contractor chooses. Bid the project as advertised. Embankment In-Place and Topsoil are considered predetermined quantities. An adjustment of these quantities can be requested through section 105.08.2.I Predetermined Pay Quantities.

-4-
Submitted: Thursday 03-MAR-2022 09:58 AM
Company: Poteet Construction
Contact: Gary Pfister
Will MDT accept a system that uses driven steel sockets for the line posts?
Answer
Submitted: Tuesday 03-MAR-2022 07:28 AM
Provide a cable rail system that fulfills the requirements of the Contract. Driven steel sockets will not be accepted for line posts.

CURRENT QUESTIONS & ANSWERS

-5-
Submitted: Wednesday 16-MAR-2022 08:18 AM
Company: Mountain West Holding Co
Contact: Chris Connors
The provisions specify to use concrete that meets the manufacturer's specifications. Will the contractor not need a MDOT pre-approved class concrete under this provision? Will the CEI be performing testing of the concrete at the site? If so, what is the contractor responsible to have on site for their testing (i.e power sources, etc..)? Since concrete will be placed over a long range area, will multiple testing sites be required? If field curing is necessary, it is likely that the concrete pouring process will be miles down the road long before 28 day testing is complete at a previous testing site. Please provide guidance of what the contractor should expect to make available.
Answer
Submitted: Thursday 17-MAR-2022 07:51AM
Provide Class General Concrete unless an alternate mix design is required to meet specific rail manufacturer specifications. Submit a mix design for review and approval in accordance with Section 551 of the Standard Specifications.

The CEI will be performing concrete testing on site, and will have testing equipment and a cure box with a MDT power source. As outlined in the standard specifications, MDT will need access to the pour site for testing.

-6-
Submitted: Wednesday 16-MAR-2022 08:21 AM
Company: Mountain West Holding Co
Contact: Chris Connors
Please confirm that the payment of all cable rail length will exclude each 50ft terminal section even though there is no terminal bid item?
Answer
Submitted: Wednesday 16-MAR-2022 12:11 PM
Cable rail terminal sections will be measured and paid for per Liner Foot in the HIGH-TENSION CABLE RAIL LNFT bit item.

-7-
Submitted: Wednesday 16-MAR-2022 02:21 PM
Company: Coral Construction Company
Contact: Kris Karpstein
Has a finish grade surface been built by MDT for the Median and Ditch Grading?
Answer
Submitted: Monday 21-MAR-2022 02:11 PM
MDT did not build a finish grade surface for the Median and Ditch Grading.

General Decision Number: MT20220079 02/25/2022

Superseded General Decision Number: MT20210079

State: Montana

Construction Type: Highway

Counties: Montana Statewide.

HIGHWAY CONSTRUCTION PROJECTS

Note: Contracts subject to the Davis-Bacon Act are generally required to pay at least the applicable minimum wage rate required under Executive Order 14026 or Executive Order 13658. Please note that these Executive Orders apply to covered contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but do not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60).

If the contract is entered into on or after January 30, 2022, or the contract is renewed or extended (e.g., an option is exercised) on or after January 30, 2022:	. Executive Order 14026 generally applies to the contract. . The contractor must pay all covered workers at least $15.00 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in 2022.
If the contract was awarded on or between January 1, 2015 and January 29, 2022, and the contract is not renewed or extended on or after January 30, 2022:	. Executive Order 13658 generally applies to the contract. . The contractor must pay all covered workers at least $11.25 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on that contract in 2022.

The applicable Executive Order minimum wage rate will be adjusted annually. If this contract is covered by one of the Executive Orders and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must still submit a conformance request. Additional information on contractor requirements and worker protections under the Executive Orders is available at https://www.dol.gov/agencies/whd/government-contracts.

Modification Number Publication Date

0 01/07/2022

1 02/25/2022*

SUMT2014-001 02/19/2014

Rates Fringes

CARPENTER

Carpenter/Piledriverman.....$ 29.00 11.82

Millwright.....$ 32.00 11.82

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Carpenter zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

CEMENT MASON/CONCRETE FINISHER...$ 24.87 10.80

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Cement Mason/Concrete Finisher zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

DIVER

Diver Tender.....$ 37.16 14.52
Diving.....$ 76.32 14.52
Stand-By.....$ 38.16 14.52
The tender shall receive 2 hours at the straight time pay rate per shift for dressing and/or undressing a Diver when work is done under hyperbaric conditions.

Depth Pay (Surface Diving):

0-20 ft.: Free zone
>20-100 ft.: $2.00 per ft.
>100-150 ft.: $3.00 per ft.
>150-220 ft.: $4 00 per ft.
>220 ft.: $5.00 per ft.
Diving in Enclosures (Diver Only):

0-25 ft.: Free zone
>25-300 ft.: $1.00 per ft.

DIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN (LINE CONSTRUCTION)

Equipment Operator.....$ 33.27 14.16
Groundman.....$ 25.98 13.25
Lineman.....$ 43.43 15.38

TRAVEL PAY:

$50.00 per day - 0-25 Miles from the County Courthouse of the following cities: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, and Missoula.

$60.00 per day - Over 25 Miles

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN

All Areas.....$ 32.74 13.42

TRAVEL PAY:

Zone 1: 0 to 10 miles - Free
Zone 2: 10 to 60 miles - Federal mileage both ways/day
Zone 3: Over 60 miles - $75.00 per day

The Electrician zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

IRONWORKER.....$ 27.25 20.98

TRAVEL PAY:

0 to 45 miles - Free
45-85 miles - $55.00 per day
Over 85 miles - $85.00 per day

The Ironworker zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base + $2.50
Zone 3: Over 50 miles - Base + $3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

LABORER

Group 1.....$ 20.90 9.60
Group 2.....$ 23.97 9.60
Group 3.....$ 24.19 9.60
Group 4.....$ 25.18 9.60

GROUP 1: Flag Person

GROUP 2: All General Labor work; Burning Bar; Bucket Man; Carpenter Tender; Caisson Worker; Cement Mason Tender; Cement Handler (dry); Chuck Tender; Choker Setter; Concrete Worker; Curb Machine-Lay Down; Crusher and Batch Plant Worker; Fence Erector; Form Setter; Form Stripper; Heater Tender; Landscaper; Pipe Wrapper; Pot Tender; Powderman Tender; Rail and Truck Loaders and Unloaders; Riprapper; Sealants for Concrete and other materials; Sign Erection, Guard Rail and Jersey Rail; Stake Jumper; Spike Driver; Signalman; Tail Hose man; Tool Checker and Houseman; Traffic Control Worker.

GROUP 3: Concrete Vibrator; Dump man (Grade man); Equipment Handler; Geotextile and Liners; High-Pressure Nozzleman; Jackhammer (Pavement Breaker); Laser Equipment; Non-riding Rollers; Pipelayer; Posthole Digger (power); Power Driven Wheelbarrow; Rigger; Sandblaster; Sod-Cutter-power; Tampers

GROUP 4: Asphalt Raker; Cutting Torch; Grade Setter; High-Scaler; Power Saws (Faller & Concrete); Powderman ($1.00 per hour above Group 4 rate); Rock & Core Drill; Track or Truck Mounted Wagon Drill; Welder including Air Arc

LABORERS ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

PAINTER (Pavement Marking/Milling and related work. Includes operating marking and all other equipment and all work involved in application of pavement markings including epoxies, paints, tape, buttons, thermo-plastics, and any other products applied for traffic marking purposes and for directing and regulating traffic and cutting rumble strips) .....$ 28.00 10.30

PAINTER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

POWER EQUIPMENT OPERATOR:

Group 1.....$ 26.52 10.40
Group 2.....$ 28.55 10.40
Group 3.....$ 29.41 10.40
Group 4.....$ 30.10 10.40
Group 5.....$ 31.44 10.40
Group 6.....$ 32.13 10.40
Group 7.....$ 34.23 10.40

GROUP 1: Air Compressor; Auto Fine Graders; Belt Finishing Machine; Boring Machine (small); Cement Silo; Crane, A-Frame Truck Crane; Crusher Conveyor; DW-10, 15, and 20 Tractor Roller; Farm Tractor;

Forklift; Form Grader; Front End Loader Under 1 CU Yard; Heavy Duty Drills; Herman Nelson Heater; Mulching Machine; Oiler, All Except Cranes & Shovels; Pumpman.

GROUP 2: Air Doctor; Backhoe/Excavator/Shovel to and including 3 CU Yard; Bit Grinder; Bituminous Paving Travel Plant; Boring Machine Large; Broom, Self-Propelled; Concrete Travel Batcher; Concrete Float & Spreader; Concrete Bucket Dispatcher; Concrete Finish Machine; Concrete Conveyor; Distributor; Dozer; Rubber-Tired, Push & Side Boom; Elevating Grader/Gradall; Field Equipment Serviceman; Front End Loader 1 CU Yard to including 5 CU Yard; Grade Setter; Heavy Duty Drills, All Types; Hoist/Tugger, All; Hydralift & Similar; Industrial Locomotive; Motor Patrol, Except Finish; Mountain Skidder; Oiler - Cranes & Shovels; Pavement Breaker, EMSCO; Power Saw, Self-Propelled; Pugmill; Pumpcrete/Grout Machine; Punch Truck; Roller, Other Than Asphalt; Roller, Sheepsfoot, Self-Propelled; Roller, 25 Tons and Over; Ross Carrier; Rotomill Under 6 Ft; Trenching Machine; Washing/Screening Plant.

GROUP 3: Asphalt Paving Machine; Asphalt Screed; Backhoe/Excavator/Shovel Over 3 CU Yard; Cableway Highline; Concrete Batch Plant; Concrete Curing Machine; Concrete Pump; Cranes; Creter; Cranes, Electric Overhead; Cranes 24 Tons and Under; Curb Machine/Slip Form Paver; Finish Dozer; Front End Loader Over 5 CU Yard; Mechanic/Welder; Pioneer Dozer; Roller Asphalt (Breakdown & Finish); Rotomill Over 6 FT; Scraper, Single, Twin or Pulling Belly Dump; Yo-Yo Cat.

GROUP 4: Asphalt/Hot Plant Operator, Cranes, 25 Tons to 44 Tons; Crusher Operator; Finish Motor Patrol; Finish Scraper.

GROUP 5: Cranes, 45 Tons to Including 74 Tons.

GROUP 6: Cranes, 75 Tons to Including 149 Tons; Crane, Whirley (All).

GROUP 7: Cranes, 150 Tons to Including 250 Tons (Add $ 1.00 For Every 100 Tons Over 250 Tons; Crane, Tower (All).

POWER EQUIPMENT OPERATOR ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

TRUCK DRIVER

Group 1.....$ 22.39 10.16
Group 2.....$ 28.06 10.16

GROUP 1: Pilot Car

GROUP 2: Combination Truck and Concrete Mixer and Transit Mixer; Dry Batch Trucks; Distributor Driver; Dump man; Dump Trucks and Similar Equipment; Dumpster; Flat Trucks; Lumber Carriers; Lowboys; Pickup; Powder Truck Driver; Power Boom; Serviceman; Service Truck/Fuel Truck/ Tire person; Truck Mechanic; Trucks with Power Equipment; Warehouseman, Parts man, Cardex and Warehouse Expeditor; Water Trucks.

TRUCK DRIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles – Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury, or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of ""identifiers"" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers:

A four-letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than ""SU"" or ""UAVG"" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers:

Classifications listed under the ""SU"" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers:

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those

classifications: however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can

be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter

* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations.

Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7).

Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board).

Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

1. HIGH TENSION CABLE BARRIER RAIL

A. Description. This work is furnishing and installing a pre-stretched high tension, socketed post cable median barrier system as shown in the plans and described below.

B. Materials. Furnish a cable barrier system meeting the following general requirements.

- System must meet the Manual for Assessing Safety Hardware (MASH 2009 Edition) Test Level 3 on a 6H:1V or flatter median v-ditch slope.
- All components of the system must meet TL-3 requirements.
- Maximum deflection of 10 feet with a maximum post spacing of 16.5 feet.

1) High-Tension Cable Rail Components:

a) Pre-Stretched Cable Rope. Furnish a system using galvanized steel rope meeting AASHTO M30 and ASTM A741-98 Type I Class A coating with a minimum break strength of 39,000 pounds and a modulus of elasticity of no less than 11,805,000 psi after pre-stretching. Ensure the cable is factory pre-stretched to compress the fibers of cable to prevent future strain relaxation of the cable.

b) Cable Splices. Furnish cable splices, turnbuckles and threaded fittings of the equivalent strength to the cable. Furnish turnbuckles for tensioning the cable at intervals not to exceed the manufacturer's recommendations. Minimize field splices by using factory installed swages, devices designed to transfer loads from the cable end to a threaded connection, to the greatest extent feasible and furnish only one field splice per cable, per run of rail, unless otherwise approved by the Project Manager. Use only closed body wedge type connections for field splices.

c) High Tension Cable Rail Terminal Sections. Furnish concrete foundations for all posts and cable terminations in accordance with the manufacturer's recommendations and as specified in the contract. Although different manufacturers may show different pay lengths and beginning of length of need for terminals in their details, the Department will define the terminal section as the first 50 feet from the end point of the terminal section. Regardless of system furnished or direction of impact, apply an assumed length of 50 feet from the end point of the terminal section to the beginning of length of need.

2) Socketed Line Posts and Line Post Hardware.

a) Furnish factory galvanized socketed posts, sockets and hardware. Galvanize all posts, sleeves, and other hardware after fabrication meeting the requirements of Subsection 711.08.

b) Delineation. When the cable barrier is within 20 feet of the inside travel lane shoulder stripe, provide delineation at intervals not to exceed 40 feet for the direction of travel. Furnish delineation with a minimum of 4 in2 of reflective yellow sheeting material meeting the requirements of Subsection 704.01.10. If the cable barrier is more than 20 feet from the inside travel lane shoulder stripe, do not provide delineation for that direction. At median crossover locations, furnish a freestanding delineator a minimum of 2 feet and a maximum of 4 feet from the end of each cable termination point.

c) Furnish a cap system to inhibit water and soil from entering the void of the post socket. Furnish all other hardware necessary to complete the installations.

d) Furnish all materials including wire rope, fittings, posts, reflectorized spacers or post caps, and terminals that meet the manufacturer's specifications and details.

Repair any galvanized steel or sheet metal parts that have damage to the galvanization by painting with one coat of zinc rich paint and two coats of aluminum paint meeting the requirements of Section 710. Replace galvanized steel or sheet metal parts that have excessive damage with factory coated components, the Project Manager will determine what level of damage requires replacement versus those that can be repaired.

e) Concrete. Furnish concrete meeting the manufacturer's specifications for line post socket footings and terminal sections.

C. Construction.

1) Submittals. Submit to the Project Manager a minimum of 30 calendar days prior to beginning construction on any portion of the cable barrier system the following:

a) All manufacturer's MASH 2009 (TL-3) approvals.

b) Prestressed cable rope. Submit separate certifications for the pre-stretching process in addition to the wire rope and other certifications

c) Concrete. Submit the manufacturer's recommended mix design.

d) Shop drawings showing the cable barrier terminal, typical installation of line post and sockets, post spacing on curves, and cable installation a minimum of 45 calendar days prior to beginning construction for Project Manager's approval.

2) General. Conduct a pre-installation conference with the installer, manufacturer's representative and all Department personnel assigned to oversee construction.

Following completion of all cable guardrail installations, conduct a maintenance conference with the manufacturer's representative and Department maintenance and construction personnel discussing all aspects of maintaining and repairing High-Tension Cable Rail.

Field stake all terminal section installations. Ensure the manufacturer's representative reviews the field staking with the Contractor and Project Manager and provides recommendations for adjustment to ensure installations best meet the intent of the contract, the manufacturer's recommendations, and existing field conditions.

Reduce post spacing as necessary on curves and at angle points in accordance with the manufacturer's recommendations to ensure post/cable stability and to maintain a maximum deflection of 10 feet throughout each curve, when struck from either direction. See the plan sheets for the curve radii. Submit post spacing criteria for horizontal curves to the Project Manager.

3) High-Tension Cable Rail Line Posts and Terminal Sections.

Complete all grading and topsoil operations to finished line and grade prior to installation of the line posts and terminal sections. Provide no less than the minimum dimensions for cable terminal concrete foundations and line post socket footings as specified in the contract and no less than that recommended by the manufacturer. The minimum depth for cable terminal foundations is 5 feet. The minimum depth for line post socket foundations is 36 inches. Do not use a tubular concrete form for casting any concrete footings or anchors.

Cast concrete cable terminal foundations and line post socket footings in place, against well compacted, undisturbed soil. If the surrounding soil is disturbed or otherwise unsuitable, remove and compact in lifts meeting the requirements of Section 203 and the manufacturer's recommendations. If excavation for the holes results in mounding around the holes, remove the mounded material in a manner that results in the area around the holes being flush with the surrounding grade. Fill excess excavation volumes with additional concrete at no cost to the Department. Provide a positive method of setting post sleeves in concrete ensuring that the inserted posts will be plumb and maintain correct line and grade. Place reinforcing bars in accordance with the manufacturer's approved shop drawings.

Set line posts and concrete sockets to achieve the proper cable height and vertical and horizontal tolerances set by the manufacturer. At a minimum, install concrete sockets so that the sleeves are within 1/2 inch of horizontal alignment. Replace posts, terminals, and concrete sockets and foundations not set at the proper line and grade prior to installation of the cables.

Allow all concrete foundations and footings to cure to design strength prior to stringing cable. The Contractor is responsible for determining when adequate strength is achieved. Any failures due to inadequate strength are the Contractor's responsibility. Replace cable anchorage concrete foundations with larger size foundations if the foundations display movement of 1 inch or greater, at any time up to final project acceptance. If lateral movement of the line posts

occurs after tensioning the cable, add additional posts in accordance with the manufacturer's recommendations at no cost to the Department.

4) Cables and Fittings.

Install the cables at the correct elevation and proper heights as shown in the manufacturer's design and approved shop drawings.

To the greatest extent feasible, splice segments of cable with factory installed fittings on the end of the cables. Where field installation of mechanical fittings (such as swages or closed body wedge type devices) on the ends of the cable are necessary, the Inspector will witness the field splice. Non-witnessed field splices will not be accepted and must be removed and replaced at no cost to the Department. Complete field splice installations in accordance with the manufacturer's recommendations and to ensure the tension can be adequately transferred through the connections.

Stagger splices in accordance with the manufacturer's recommendations. The number and location of splices is subject to the approval of the Project Manager.

5) Digital Tension Meters. Furnish digital tension meters (specifically designed for tensioning high tension cable guardrail). Submit certificate of calibration showing a guaranteed accuracy of 3.00% (+/-).

Place turnbuckles for tensioning at intervals not to exceed the manufacturer's recommendations. Once a cable run is strung on the posts and anchored, apply tensioning procedures in accordance with the manufacturer's recommendations prior to exposing installations to adjacent traffic. Use the specified tension meter and adjust as required for the cable temperature per manufacturer recommendations. Ensure cable ends on each side of the turnbuckle are fully constrained to prevent rotation and subsequent twisting or untwisting of the cables while tightening or loosening the turnbuckle. Perform additional tensioning in accordance with the manufacturer's recommendations. Prior to final inspection, re-verify and if necessary, re-tension each cable run.

Maintain a tension log showing date, time, location, cable temperature, ambient air temperature and final tension reading, signed by the person performing the tension testing. Submit the tensioning information and the written log to the Project Manager no later than 2 calendar days after the final tensioning of each cable is completed.

6) Maintenance During Construction. The Contractor is responsible for maintaining and repairing the cable barrier system until the contract is accepted in accordance with Subsection 105.17. Repair the damaged barrier system within 24 hours. The repaired section needs to be re-inspected and certified by the manufacturer.

Repairs made to the cable system and terminals due to damage not caused by the Contractor will be paid in accordance with Subsection 109.04. No additional payments will be made for repairs resulting from faulty materials or Contractor negligence.

7) Cable System Installation Training and Certification.

Submit the manufacturer's recommendations, details, installation procedures, and other pertinent information along with electronic PDF access to these items. Discuss all aspects of the installation, tensioning, testing, and other procedures. Direct special attention to the method of constructing field installed mechanical fittings, such as swages and closed body wedge type connections, on the ends of the cable.

Have a manufacturer's representative present during the installation of the first section of the cable barrier system to supervise installation of all components through the cable tensioning. Upon completion of the entire project cable barrier system, have the manufacturer's representative inspect and certify in writing that the cable barrier system was installed in accordance with the manufacturer's design and the requirements of this contract.

Following completion of all cable guardrail installations, and prior to project acceptance, conduct a maintenance conference with the manufacturer's representative and specified Department maintenance and construction personnel, as well as area emergency services

personnel, covering all aspects of maintaining and repairing High-Tension Cable Rail. Submit installation and maintenance manuals along with electronic PDF access to the manuals.

8) High-Tension Cable Rail Replacement Parts Package. Furnish the following replacement parts package:

9) Two Tension Meters and associated hardware.

10) Cable Sheaves for the Steel Cable.

11) Carry Cases.

12) One dozen sets of cable field splicing hardware (for closed body wedge type connections) and two sets of any specialized hand tools.

13) One dozen sets of turnbuckle splicing hardware and two sets of any specialized hand tools.

14) 1000 feet of additional galvanized, pre-stretched cable.

15) Two sets of terminal end posts (first 50 feet) with all specific hardware, including the steel post sleeves for installation in concrete.

16) 500 line posts with all attached hardware and accessories including spacers, reflectors, hooks, straps, bolts, caps, concrete socket covers, etc.

17) 50 line post sleeves for installation in concrete.

Deliver the replacement parts package to the Great Falls Division Maintenance Office (200 Smelter Ave. NE Great Falls 59403) prior to acceptance of the project. Coordinate delivery with the Project Manager.

D. Method of Measurement

1) High-Tension Cable Rail. High-Tension Cable Rail is measured by the linear foot. The length is determined by measuring from end to end and then reducing the length for each terminal section. All cable rail delineation is considered incidental to this item and will not be measured separately.

2) Replacement Parts. The High-Tension Cable Rail Replacement Parts Package is measured per lump sum and paid under item Miscellaneous Items- Repair. The High-Tension Cable Rail Replacement Parts Package includes all parts and delivery as specified.

3) High-Tension Cable Rail – Training. Includes both pre-installation training and post- installation training, is measured as lump sum and paid under item Miscellaneous Items-Repair.

E. Basis of Payment.

Payment for the completed and accepted quantities is made under the following:

Pay Item	Pay Unit
High-Tension Cable Rail	LNFT
Miscellaneous Items- Repair	Lump sum

Payment at the contract unit prices is full compensation for all resources necessary to complete these items of work under the contract.

MONTANA DEPARTMENT OF TRANSPORTATION
SCHEDULE OF ITEMS

CONTRACT ID: 05322

PROJECT: HSIP 15-5(143)278 (9376143000)
SF 169 I-15 HT CABLE RAIL

PROP LINE NO.	ITEM NUMBER	ITEM DESCRIPTION	UNIT OF MEASURE	QUANTITY
	SECTION 0001 - HIGH TENSION CABLE RAIL			
0010	104 030 010	MISCELLANEOUS WORK	UNIT	10,000.00
0020	104 030 011	**DELETED**		
0030	104 030 035	MISCELLANEOUS ITEMS-REPAIR	LS	1.00
0040	105 070 000	CONTRACTOR SURVEY AND LAYOUT	LS	1.00
0050	109 200 005	MOBILIZATION	LS	1.00
0060	203 020 375	EMBANKMENT IN PLACE	CUYD	5,906.00
0070	203 080 100	TOPSOIL-SALVAGING AND PLACING	CUYD	3,546.00
0080	208 010 150	TEMPORARY EROSION CONTROL-LS	LS	1.00
0090	208 010 200	TEMPORARY EROSION CONTROL-FIXED	UNIT	500.00
0100	603 012 555	RCP 24 IN	LNFT	10.00
0110	603 587 020	REMOVE PIPE CULVERT	LNFT	6.00
0120	604 010 270	INLET MEDIAN-TYPE 1	EACH	4.00
0130	606 010 117	HIGH-TENSION CABLE RAIL	LNFT	50,830.00
0140	610 100 103	SEEDING AREA NO 3	ACRE	6.60
0150	610 100 555	CONDITION SEEDBED SURFACE	ACRE	6.60
0160	618 030 005	TRAFFIC CONTROL DEVICES CB	UNIT	200,000.00

TABLE OF CONTENTS
FEDERAL AID PROJECT(S) HSIP 15-5(143)278

1. PROJECT DESCRIPTION [102] 5
2. CONTRACT TIME – FLEX TIME PROCEED DATE [108] (REVISED 1-21-16) 5
3. CONTRACT DOCUMENTS [102] (REVISED 3-10-22) 6
4. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 1-18-18) 6
5. DBE QUOTES [102] (REVISED 3-10-16) 6
6. DBE USAGE [102] (REVISED 2-13-20 M) 6
7. LABOR REQUIREMENTS [102] (REVISED 9-5-19) 7
8. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 3-12-20) 7
9. ZONE PAY [102] (REVISED 5-10-18) 7
10. BIDDING REQUIREMENTS – PROPOSAL GUARANTEE [102] (REVISED 12-17-20) 7
11. DELIVERY AND PUBLIC OPENING OF PROPOSALS [102] (ADDED 9-17-20) 7
12. 103.07 EXECUTION AND APPROVAL OF CONTRACT [103] (ADDED 6-13-19) 8
13. PARTNERING- LEVEL II FACILITATION [105] (ADDED 2-25-21) 8
14. STEEL PRICE ADJUSTMENT [106] (REVISED 10-28-21) 8
15. CONSULTANT ENGINEERING AND INSPECTION (CEI) ADMINISTERED PROJECTS 9
16. CEI SERVICES ADDITIONAL REQUIREMENTS 9
17. NOTICE TO BIDDERS [108] (ADDED 11-21-08) 9
18. SUBCONTRACTING [108] (ADDED 9-23-21) 9
19. BILLING CYCLE [109] (ADDED 8-12-21) 10
20. ENVIRONMENTAL SPECIFICATIONS [208] (ADDED 9-9-21) 10
21. PROTECTION OF STORM WATER DRAINAGE SYSTEM AND COMPLIANCE WITH LOCAL PERMIT REQUIREMENTS [208] (REVISED 9-9-21M) 10
22. STORM WATER PERMITTING REQUIREMENTS UNDER THE MONTANA POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [208] (REV 3-16-17) 11
23. HIGH TENSION CABLE BARRIER RAIL 13
24. REINFORCED CONCRETE PIPES, BOXES, INLETS AND MANHOLES [603] (ADDED 12-13-18) 17
25. TRAFFIC CONTROL – USAF CONVOYS [618] (REVISED 3-25-21) 17
26. TRAFFIC CONTROL DEVICES – PLASTIC DRUMS [618] (REVISED 1-23-20) 17

SECTION II
Nondiscrimination Notice
Seeding
Permit Maps

SECTION III
Standard Provisions & Requirements

SPECIAL PROVISIONS

FEDERAL AID PROJECT NO(S). HSIP 15-5(143)278

(REVISED 09-09-21)

The following special provisions are hereby made part of the contract and supplement and/or supersede any sections of the Standard and Supplemental Specifications of Road and Bridge Construction, adopted by the Montana Department of Transportation and the Montana Transportation Commission and all supplements thereto in conflict therewith.

The following documents are hereby incorporated by reference into this contract:

- "Standard and Supplemental Specifications for Road and Bridge construction 2020 V2.3 Edition" found at the following link: https://www.mdt.mt.gov/other/webdata/external/const/specifications/2020/SPEC-BOOK/2020-SPEC-BOOK-V2.3.pdf
- The most recent version of the Detailed Drawings can be found at the following link: https://www.mdt.mt.gov/business/contracting/detailed_drawings.shtml
- The most recent version of the Materials Manual can be found at the following link: https://www.mdt.mt.gov/other/webdata/external/materials/materials_manual/MDT_MATERIALS_MANUAL_090921_LETTING.pdf

The latest version of the Standard and Supplemental Specifications, Quarterly updates, and revision summaries can be found at the following website: https://www.mdt.mt.gov/business/contracting/standard_specs.shtml

The Question-and-Answer Forum opens at 5:00 p.m. on the bid letting advertisement date and closes at 10:00 a.m. on the Monday before the bid letting. If Monday is a state holiday, the forum will close on Friday before the bid letting at 3:00 p.m. Questions raised by potential bidders on this project and answers and other information posted by the Department on the "Question and Answer Forum" can be found at the website https://www.mdt.mt.gov/business/contracting/qacurrent.shtml up to 5 p.m. on the day before the bid letting.

The U.S. Department of Transportation (DOT) operates a toll-free number at 1-800-424-9071, 24 hours a day - 7 days a week. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use this number to report such activities. All information will be treated confidentially, and callers may remain anonymous.

The Department attempts to provide reasonable accommodations for any known disability that may interfere with a person participating in any service, program, or activity of the Department. Alternate accessible formats of this document will be provided upon request. If reasonable accommodation is needed to participate in Department bid lettings, call the Civil Rights Bureau at 444-6331 or TTY 406-444-7696 [TTY 1-800-335-7592 (toll free)].

1. PROJECT DESCRIPTION [102]

Installation of high-tension cable rail on the SF 169 I-15 High Tension Cable Rail project located in Cascade County. Work includes grading and drainage. The project begins within the Great Falls Urban limits at RP 279.1 continues approximately 10.9 miles north and northwest adjacent to Interstate Route 15 to RP 290.0. The project exits the Great Falls Urban limits at RP 282.867. The project enters the Great Falls City limits at RP 279.593 and exits at RP 280.883.

2. CONTRACT TIME – FLEX TIME PROCEED DATE [108] (REVISED 1-21-16)

A. General. This provision modifies Subsection 108.02 of the Specifications.

B. Notice to Proceed. The notice to proceed will be issued with an effective date of August 1, 2022. The Contractor may change the notice to proceed date to an earlier date if written notification is received at least ten calendar days in advance of the date selected and the

selected date is approved by the Project Manager. Include an updated schedule with the notification.

C. Contract Time. Contract time assessment will begin on the notice to proceed date issued by the Department or as changed by the Contractor, whichever is earlier. Work is to be completed in 70 working days.

3. CONTRACT DOCUMENTS [102] (REVISED 3-10-22)

The following documents are now available within the Contractors Reference Material on the Department's Contracting and Bidding webpage https://www.mdt.mt.gov/business/contracting/ :

1) Table of Contractor's Submittals. (Revised 3-10-22)
2) Traffic Control Rate Schedule
3) Erosion Control Rates

4. DISADVANTAGED BUSINESS ENTERPRISES (DBE) REQUIREMENTS [102] (REVISED 1-18-18)

The DBE goal for this contract is 0.0%. Use the AASHTOWare Project Bids™ Electronic Bid System (EBS) to print the DBE submittal and timing requirements. If the contract does not have a project-specific goal, the field will display in the AASHTOWare Project Bids™ bid file as a blank field.

List the DBE commitments in the EBS file. An on-line DBE Directory is available at: https://app.mdt.mt.gov/dbe/dbe/search.

If the DBE goal cannot be met, show a good faith effort per the Good Faith Effort Criteria and supporting forms, available at: http://www.mdt.mt.gov/publications/forms.shtml. Submit the Good Faith Effort documentation within 48 hours of the bid opening.

5. DBE QUOTES [102] (REVISED 3-10-16)

The Department has a quick and easy way for you to request quotes from Montana DBE-certified companies. The information goes to the DBE companies that same day. The on-line form is located at web site: https://app.mdt.mt.gov/dbeqt/.

Call the Department DBE Supportive Services, 1-800-883-5811, for further assistance. Using this online request form will be considered for good faith efforts, but it does not constitute meeting all requirements of good faith efforts.

6. DBE USAGE [102] (REVISED 2-13-20 M)

Contract specific goals are not placed on contracts; however, the Department has an overall 6.5% DBE goal it must achieve. To assist contractors in determining their DBE commitment level, the Department has reviewed the estimates for this contract, and has established an aspirational goal of 10.3% DBE usage. Although not a contract requirement, the Department believes that the aspirational goal can realistically be achieved through race neutral measures based on current availability of DBEs and standard competitive procurement processes. While the utilization is not mandatory to be awarded the project, continuing utilization of DBE firms on contracts supports the success of Montana's DBE Program.

Any project listing a 0% DBE aspirational goal does not mean that a DBE may not be used on that project. A 0% DBE aspirational goal may have been established due to any of the following reasons:

- Limited identified subcontracting opportunities;
- Minimal contract days; and/or,
- Small contract dollar amount.

Contractors are encouraged to identify any opportunities to subcontract to DBEs.

The Department's DBE directory may be found at the following website: https://app.mdt.mt.gov/dbe/dbe/search.

7. LABOR REQUIREMENTS [102] (REVISED 9-5-19)

Pay the minimum wage rates contained elsewhere in the bid package. Comply with the required contract provisions contained in the form FHWA 1273 included with this contract. To obtain more information, contact the Department's Construction Engineering Services Bureau at 2701 Prospect, Helena, MT (406)475-2258, (800)335-7592 (TTY) or (406)444-7297 (Fax). The local employment service office, designated by the Workforce Service Division, Department of Labor & Industry, for this project is Great Falls.

Executive Orders 13658 and 13706 do not apply to this contract.

8. CERTIFIED PAYROLL COMPLIANCE ELECTRONIC PAYROLL SUBMISSION [102] (REVISED 3-12-20)

The Contractor and all subcontractors must use AASHTOWare Project Civil Rights & Labor™ (CRL) to submit Certified Payrolls (CPRs). Ensure that all subcontractors have submitted their Vendor Access Form which can be found on the following page: https://www.mdt.mt.gov/business/contracting/prevailing-wage.shtml to the Department and have received their login IDs prior to work.

Request the contract number and project ID(s) from the Project Manager. Provide the information to all subcontractors subject to the FHWA 1273 requirements. This information is also available using the Search Awarded Contracts located at: https://app.mdt.mt.gov/project-search/project/search.

Provide assistance and ensure all subcontractors submit CPRs electronically into CRL within the required timeframe.

9. ZONE PAY [102] (REVISED 5-10-18)

Wage rates and zone pay requirements can be found elsewhere in the proposal. The mileage for determining the zone is 10 miles.

Indicate the Zone requirements for all classifications. Provide this information to the Project Manager at the Preconstruction Conference on Form MDT-CON-102_02.

10. BIDDING REQUIREMENTS – PROPOSAL GUARANTEE [102] (REVISED 12-17-20)

Subsection 102.07(C)(2), Proposal Guarantee, of the Standard Specifications is hereby rescinded and replaced with the following:

Proposal Guarantee. The bid bond is on the most current version of MDT-CTP-102-07-1; is signed and sealed in the proper places; a copy of the agent's Power of Attorney for the insurance company is attached; and contains the correct and complete project number; all signatures are original (stamped signatures are unacceptable). A qualified third-party surety agency must verify the proposal guarantee. Electronic bid bond verification must be submitted through AASHTOWare Project Bids and Bid ExpressTM . Contact Bid Express for more information on electronic bid bond verification.

If an error occurs with electronic bid bond verification through AASHTOWare Project Bids and Bid Express, submit the Electronic Bid Bond Form MDT-CTP-102-07-2 in Adobe PDF format via email to mdtcntplns@mt.gov prior to the bid opening. Hard copy or paper bid bonds submitted to the Department will not be accepted. Bids that include submission of a bid bond without electronic verification or Electronic Bid Bond Form CPB_102_07 will be deemed non-responsive.

11. DELIVERY AND PUBLIC OPENING OF PROPOSALS [102] (ADDED 9-17-20)

Subsection 102.10(A) Bid Submission by Sealed Envelope is hereby rescinded.

Submissions by sealed envelope will be deemed non-responsive.

12. 103.07 EXECUTION AND APPROVAL OF CONTRACT [103] (ADDED 6-13-19)

Use DocuSign to sign the contract in accordance with Subsection 103.07.

No later than 5 calendar days after the date of bid-opening (the date of bid opening to count as the first full day), the apparent low bidder must submit to Construction Contracting Bureau, during its regular work hours, a fully completed Contract Recipients Form documenting names and emails of authorized agents of the Contract and Surety to sign the contract. If the 5th day is a holiday, turn the documentation in earlier. The Contract Recipients Form is available at the following web page: https://www.mdt.mt.gov/publications/forms/contract-recipients.shtml.

The bid proposal may be considered non-responsive and rejected if the above form(s) are not submitted within the required time frame.

13. PARTNERING- LEVEL II FACILITATION [105] (ADDED 2-25-21)

An internal partnering meeting will be facilitated between the Project Manager and the Contractor prior to the Notice to Proceed date.

Implement partnering in accordance with the Montana Partnering Field Guide found at the following link: https://www.mdt.mt.gov/publications/manuals.shtml#con

Make a good-faith effort to settle any unresolved discrepancies by utilizing the Partnering Escalation/Issue Resolution Ladder identified in the Partnering Field Guide prior to submitting a notice of claim.

14. STEEL PRICE ADJUSTMENT [106] (REVISED 10-28-21)

A. General. The Contractor may elect to participate in a Steel Price Adjustment to payments for selected bid items made primarily of steel. Payment adjustments will only be made for fluctuations in the cost of the steel material. No adjustment will be made for changes in the cost of manufacturing, fabrication, shipping, storage, for any products purchased from the mill prior to the letting date, or for steel that is not permanently incorporated into the work.

The price adjustment will be based on the base price per pound of steel and changes to the steel price index between the bid letting date and the steel purchase date. Payment adjustments may be positive or negative.

Steel Price Index: The Department will use the Bureau of Labor and Statistics Producer Price Index (BLS PPI) “Steel Mill Products” Series ID WPU1017 not seasonally adjusted. The index used will be the final version of the index, revised 4 months after the original publication, including any corrections to the index.

The base price per pound of steel for this contract is: $0.65.

B. Applicable Bid Items. Notify the Project Manager in writing by the Notice to Proceed date or at the pre-construction conference, whichever comes first, of any intent to participate in the steel price adjustment. Select the bid items for participation at the time of notification to the Project Manager. No changes will be allowed after submission.

Nuts, bolts, rebar chairs, connecting bands, and other miscellaneous hardware items will not be included in the price adjustment. High strength bridge bolt assemblies may be included in the price adjustment.

C. Steel Price Index. Furnish the following documentation for all steel bid items selected for steel price adjustment regardless of whether the index increased or decreased:

1) Paid invoice or other proof of purchase showing the date the steel was purchased and the weight of the steel.

2) An affidavit signed by the Contractor stating that the information provided is true and accurate.

3) Submit all documentation prior to incorporating the steel into the work. This provision in no way modifies or cancels the requirements of Subsection 106.09.

D. Steel Price Adjustment. The Project Manager will calculate the adjustments. Adjustments may be positive, negative, or non-existent depending on the difference between

the Base Index (IB) and Current Index (IC). No price adjustment will be made unless the IC is 10% higher or lower than the IB.

For Increases:

Adjustment Factor (AF) = (IC/IB-1.10), rounded to the nearest 0.01
If AF is equal to or less than 0, no adjustment.
If AF is greater than 0, continue
Payment Adjustment = AF x weight x base price

For Decreases:

Adjustment Factor (AF) = (IC/IB-0.90), rounded to the nearest 0.01
If AF is equal to or greater than 0, no adjustment.
If AF is less than 0, continue
Payment Adjustment= AF x weight x base price

Where:
IB = BLS PPI for month contract was let
IC = BLS PPI for month material was purchased from the mill (invoice date)
Weight = weight of steel in pounds

15. CONSULTANT ENGINEERING AND INSPECTION (CEI) ADMINISTERED PROJECTS

This project will use CEI services to administer the project. The CEI will be the authorized representative for the department as the Project Manager and Inspectors.

16. CEI SERVICES ADDITIONAL REQUIREMENTS

Provide the Consultant with a furnished mobile office trailer meeting a minimum length of 24 feet. Provide a level parking area, the required blocking, and electrical power service for the office trailer. Transport, set-up, and make the trailer fully operational 2 calendar days prior to the Consultants scheduled work activities.

Coordinate with the Consultant and Department Project Manager on the location to park the trailer. Park, block, level, re-block, re-level and unblock the trailer as directed. Supply electrical power 24 hours a day, 7 days a week.

Include all costs associated within this provision in the unit bid price for Miscellaneous Items – Lump Sum.

17. NOTICE TO BIDDERS [108] (ADDED 11-21-08)

This project is funded in whole or in part by funds received from the Federal Highway Administration (FHWA), and its construction is wholly contingent on the state's continued receipt of those federal funds. If the federal funds are reduced or not received, the Department may choose to terminate the contract for convenience under the provisions of Subsection 108.10. Any bidder on this project, by submitting its bid, understands and accepts the possibility of the contract being terminated in the event federal funds are reduced or not available and by submitting a bid, each bidder waives any claims for costs or damages other than as specifically allowed by Subsection 108.10.2. In particular, bidders understand and accept that no payment will be allowed for any claimed anticipated profit for work not performed.

18. SUBCONTRACTING [108] (ADDED 9-23-21)

The following changes are made to Subsection 108.01:

1) Within Subsection 108.01.1 Subcontracting, rescind the 4th paragraph which begins “Include in the written subcontract…” and replace with the following:

"Include the following language in the subcontract:"

Rescind the last paragraph and replace with the following:

Do not hire or use in any manner a person or organization that performed any part of the design work for the Department unless first approved by the Department.

2) Within Subsection 108.01.2 Contract Performance, rescind the 4th and 5th paragraphs and replace with:

Do not allow a Subcontractor at any contract tier to start work until a subcontract is consented to by the CES Bureau. Submit fully executed subcontracts in electronic DocuSign PDF format. Scanned PDF subcontracts are not acceptable. Include the Consent of Surety language and Subcontractor Checklist as part of the subcontract agreement, referenced on the Subcontracting Resources webpage:

https://www.mdt.mt.gov/business/contracting/resources.shtml

Inform the Subcontractor of all the contract provisions, and that the Subcontractor is bound by all terms of the prime's contract with the Department. Provide the Subcontractor a copy of all the contract provisions including the applicable Federal Prevailing Wage rates and Required Contract Provisions FHWA 1273. Include in the subcontract the following language:

"The Subcontractor agrees to comply with all of the labor provisions contained in the attached Required Contract Provisions and Federal Prevailing Wage/Davis Bacon Wage Decision."

Rescind the last paragraph and replace with the following:

Department approved consent to subcontract, assign or transfer the contract does not release the Contractor from liability under the contract and bond.

19. BILLING CYCLE [109] (ADDED 8-12-21)

Rescind the last paragraph of subsection 109.06.1 Billing Cycle which begins "Pay all subcontractors." and replace with the following:

Pay all subcontractors within 7 calendar days after receipt of a periodic or final payment from the Department. Payment must be for the full amount due the subcontractor (including retainage) for work performed or materials provided that were included in the periodic or final payment according to the provisions of Section 28-2-2103(2)(a) MCA. A subcontract may not provide for a time longer than the law's mandated 7 calendar days.

20. ENVIRONMENTAL SPECIFICATIONS [208] (ADDED 9-9-21)

The Contractor is required to review and meet the specifications of the following subsections:

1. Work in Bear Habitat	Subsection 208.03.4E
2. AIS Watercraft and Equipment Inspection	Subsection 208.03.2D

21. PROTECTION OF STORM WATER DRAINAGE SYSTEM AND COMPLIANCE WITH LOCAL PERMIT REQUIREMENTS [208] (REVISED 9-9-21M)

This project is located within an area designated by the Montana Department of Environmental Quality (DEQ) as a regulated MS4. Contact the City of Great Falls Public Works - Engineering, PO Box 5021, 1005 25th Ave NE, Great Falls, MT, 59403, phone 406-727-8390 and Cascade County Public Works - Planning, 279 Vaughn South Frontage Road, Great Falls, MT 59404, phone 406-454-6913 to determine if additional requirements are in place for construction storm water discharges that would affect this project.

Review Subsection 208.03.1(C) for more information.

22. STORM WATER PERMITTING REQUIREMENTS UNDER THE MONTANA POLLUTANT DISCHARGE ELIMINATION SYSTEM (MPDES) [208] (REV 3-16-17)

A. Description. The Montana Department of Environmental Quality (DEQ) regulates storm water discharges under the MPDES program. If the bid package contains blank erosion control plans, a construction storm water discharge permit authorization will be required. If not, a storm water discharge permit authorization may be required for this project depending on Contractor's operations. Sum the disturbance area (as defined by DEQ) identified in the contract with the area of disturbance caused by contractor operations to determine if the permit acreage threshold is exceeded. Contractor operations can include, but are not limited to, the following support activities: staging areas, access roads, material storage areas, temporary concrete or asphalt batch plants, borrow areas, areas used for fill placement, etc. If the summed disturbance area is one acre or more, use the DEQ authorization to discharge under the MPDES General Permit for Storm Water Discharges Associated with Construction Activity for this project. In order to facilitate permit transfer, separate NOI packages are required for areas within the right-of-way and areas outside of the right-of-way. A Notice of Intent (NOI) package includes a Notice of Intent, with a topographic map, a Storm Water Pollution Prevention Plan (SWPPP), the erosion control plans, sage grouse consultation letter, if applicable, and supporting documentation.

Blank Erosion Control Plans, and a topographic map, are provided with the plans if the plans include greater than 1 acre of disturbance. Complete the erosion control plans as required by the general permit. Complete the SWPPP using DEQ's most current SWPPP Form.

B. Materials. Follow the requirements described in the Department's *Erosion and Sediment Control Best Management Practices Manual (December 2016).* Rescind Section 208 detailed drawings. Submit to the Project Manager for review and acceptance BMPs proposed for use that are not included in the Manual.

C. Construction Requirements.

1) MPDES Permit Required.

a) Submit one NOI package and the associated fees to DEQ for ground disturbance areas shown in the plans or within the right-of-way. For ground disturbance areas shown in the plans and any other areas within the right-of-way where Contractor activities causing ground disturbance are planned, the Contractor is the sole permittee until construction is complete and the General Permit is transferred to the Department or another entity.

The Department is not responsible for delays caused by incomplete or inaccurate submittals by the Contractor.

Comply with the requirements of the General Permit for Storm Water Discharges Associated with Construction Activity and implement the SWPPP. Provide two copies of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Do not begin construction activities until the required copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ is received by the Project Manager.

b) Submit a separate NOI package and the associated fees to DEQ for ground disturbance and support activity areas outside the right-of-way and not shown in the plans. Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans, are the Contractor's responsibility and must be submitted under a separate NOI package from the ground disturbance within the right-of-way. For all support activities outside the right-of-way which are not part of a larger commercial operation serving multiple unrelated construction activities, and will not continue operation beyond the completion of the contracted road construction activity, a notice of intent package must be submitted to DEQ to obtain an authorization under the storm water construction permit. Sand and gravel borrow area operations, gravel pits, and/or concrete batch plants that will continue operation beyond the

completion of the contracted road project, are part of a larger commercial operation, or serving multiple unrelated construction activities must obtain permit coverage under the Multi-Sector General Permit for Storm Water Discharges Associated with Industrial Activity (MSGP) regardless of acreage size of the activity if the activity does not already have MSGP authorization. The Contractor is the sole permittee until stabilization is complete and the General Permit is terminated or transferred to another entity. The Department is not responsible for delays caused by incomplete or inaccurate submittals to DEQ by the Contractor.

Provide a copy of the NOI Package submitted to DEQ and confirmation for receipt of a complete NOI Package from DEQ to the Project Manager prior to conducting any ground disturbance activities.

Be responsible for all temporary erosion, sediment, and pollution prevention controls for Contractor furnished material sources, staging areas, plant sites, or any other Contractor caused ground disturbance outside the right-of-way and not shown in the plans.

c) Complete and document all inspections in accordance with the requirements of the General Permit for Storm Water Discharges Associated with Construction Activity. Use DEQ's most current self-inspection form available online at: http://deq.mt.gov/Water/WPB/mpdes/stormwaterconstruction. Provide a copy of all inspection reports to the Project Manager.

Report potential noncompliance in accordance with applicable regulations, guidance, and permit conditions. Submit to the Project Manager within seven days of sending or receiving all correspondence to or from regulatory agencies regarding potential noncompliance or violations.

The temporary erosion and sediment control measures and devices to prevent pollution and control sediment transport and soil erosion will be inspected as part of the final inspection to ensure they are maintained and functioning properly. Do not transfer or terminate the General Storm Water Permit coverage until the BMPs are inspected and accepted and all records required under the permit, including inspection and monitoring reports, are furnished to the Project Manager. The Department may require that certain Best Management Practices (BMPs) be replaced by another type of BMP as a condition of permit transfer.

Upon approval of site conditions, measures, devices and all pertinent records, submit a signed copy of the Permit Transfer Notification Form provided by the Department. When submitting the General Storm Water Permit transfer package/application to the Department, include a check for the permit transfer fee. Make the check for the amount of the fee payable to the DEQ. The Department is not liable for the completeness or accuracy of Contractor records completed prior to the permit transfer. Upon receipt of the signed form, the Department will obtain signature of the new permit owner and submit to DEQ. Ensure permit conditions and responsibilities are met until confirmation of the transfer is received from DEQ. Defend and hold MDT harmless from any violations, claims, enforcement actions, penalties or fines issued for Contractor activities or recordkeeping that occurred prior to the transfer of the General Permit for Storm Water Discharges Associated with Construction Activity authorization.

If the Department concurs that final stabilization has been met during the final walk-through, the Contractor may submit a Notice of Termination form to DEQ. Pay the annual fee invoice due at the time of termination. Submit the annual fee invoice to the Project Manager for reimbursement.

2) MPDES Permit not Required.

The BMP-Administration item is included in contracts that may not meet either criteria for a MPDES permit but include ground disturbing activities. Complete BMP inspections and install BMPs, if necessary, in accordance with Section 208, if no storm water permit is required. Utilize form MDT-ENV-014, Water Pollution Control Inspection Report. A certified SWPPP Administrator is not required to conduct the inspections if no permit is required.

D. Method of Measurement. DEQ MPDES fees and monitoring costs associated with obtaining and maintaining the General Permit for Storm Water Discharges Associated with

Construction Activity for ground disturbance areas both within and outside the right-of-way are not measured separately for payment.

If no permit is necessary, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item.

E. Basis of Payment. No additional payment will be made for the DEQ MPDES fees and monitoring costs associated with the General Permit for Storm Water Discharges Associated with Construction Activity. Include these costs in the Temporary Erosion Control-Lump Sum bid item.

For project including the BMP-Administration item, include the cost of all erosion control, devices, and inspections in the BMP-Administration bid item. Partial payment for the BMP-Administration will be monthly based on the lump sum contract price in accordance with Table 208-1 in Subsection 208.05.1.

Payment for BMPs required by an event or extra work, and approved by the Project Manager, will be measured and paid for in accordance with the Erosion Control Rate Schedule contained in the contract at a unit price of $1.00 per unit.

23. HIGH TENSION CABLE BARRIER RAIL

A. Description. This work is furnishing and installing a pre-stretched high tension, socketed post cable median barrier system as shown in the plans and described below.

B. Materials. Furnish a cable barrier system meeting the following general requirements.

- System must meet the Manual for Assessing Safety Hardware (MASH 2009 Edition) Test Level 3 on a 6H:1V or flatter median v-ditch slope.
- All components of the system must meet TL-3 requirements.
- Maximum deflection of 10 feet with a maximum post spacing of 16.5 feet.

1) High-Tension Cable Rail Components:

a) Pre-Stretched Cable Rope. Furnish a system using galvanized steel rope meeting AASHTO M30 and ASTM A741-98 Type I Class A coating with a minimum break strength of 39,000 pounds and a modulus of elasticity of no less than 11,805,000 psi after pre-stretching. Ensure the cable is factory pre-stretched to compress the fibers of cable to prevent future strain relaxation of the cable.

b) Cable Splices. Furnish cable splices, turnbuckles and threaded fittings of the equivalent strength to the cable. Furnish turnbuckles for tensioning the cable at intervals not to exceed the manufacturer's recommendations. Minimize field splices by using factory installed swages, devices designed to transfer loads from the cable end to a threaded connection, to the greatest extent feasible and furnish only one field splice per cable, per run of rail, unless otherwise approved by the Project Manager. Use only closed body wedge type connections for field splices.

c) High Tension Cable Rail Terminal Sections. Furnish concrete foundations for all posts and cable terminations in accordance with the manufacturer's recommendations and as specified in the contract. Although different manufacturers may show different pay lengths and beginning of length of need for terminals in their details, the Department will define the terminal section as the first 50 feet from the end point of the terminal section. Regardless of system furnished or direction of impact, apply an assumed length of 50 feet from the end point of the terminal section to the beginning of length of need.

2) Socketed Line Posts and Line Post Hardware.

a) Furnish factory galvanized socketed posts, sockets and hardware. Galvanize all posts, sleeves, and other hardware after fabrication meeting the requirements of Subsection 711.08.

b) Delineation. When the cable barrier is within 20 feet of the inside travel lane shoulder stripe, provide delineation at intervals not to exceed 40 feet for the direction of travel. Furnish delineation with a minimum of 4 in2 of reflective yellow sheeting material meeting the

requirements of Subsection 704.01.10. If the cable barrier is more than 20 feet from the inside travel lane shoulder stripe, do not provide delineation for that direction. At median crossover locations, furnish a freestanding delineator a minimum of 2 feet and a maximum of 4 feet from the end of each cable termination point.

c) Furnish a cap system to inhibit water and soil from entering the void of the post socket. Furnish all other hardware necessary to complete the installations.

d) Furnish all materials including wire rope, fittings, posts, reflectorized spacers or post caps, and terminals that meet the manufacturer's specifications and details.

Repair any galvanized steel or sheet metal parts that have damage to the galvanization by painting with one coat of zinc rich paint and two coats of aluminum paint meeting the requirements of Section 710. Replace galvanized steel or sheet metal parts that have excessive damage with factory coated components, the Project Manager will determine what level of damage requires replacement versus those that can be repaired.

e) Concrete. Furnish concrete meeting the manufacturer's specifications for line post socket footings and terminal sections.

C. Construction.

1) Submittals. Submit to the Project Manager a minimum of 30 calendar days prior to beginning construction on any portion of the cable barrier system the following:

a) All manufacturer's MASH 2009 (TL-3) approvals.

b) Prestressed cable rope. Submit separate certifications for the pre-stretching process in addition to the wire rope and other certifications

c) Concrete. Submit the manufacturer's recommended mix design.

d) Shop drawings showing the cable barrier terminal, typical installation of line post and sockets, post spacing on curves, and cable installation a minimum of 45 calendar days prior to beginning construction for Project Manager's approval.

2) General. Conduct a pre-installation conference with the installer, manufacturer's representative and all Department personnel assigned to oversee construction.

Following completion of all cable guardrail installations, conduct a maintenance conference with the manufacturer's representative and Department maintenance and construction personnel discussing all aspects of maintaining and repairing High-Tension Cable Rail.

The Project Manager will field stake all terminal section installations. Ensure the manufacturer's representative reviews the field staking with the Project Manager and provides recommendations for adjustment to ensure installations best meet the intent of the contract, the manufacturer's recommendations, and existing field conditions.

Reduce post spacing as necessary on curves and at angle points in accordance with the manufacturer's recommendations to ensure post/cable stability and to maintain a maximum deflection of 10 feet throughout each curve, when struck from either direction. See the plan sheets for the curve radii. Submit post spacing criteria for horizontal curves to the Project Manager.

3) High-Tension Cable Rail Line Posts and Terminal Sections.

Complete all grading and topsoil operations to finished line and grade prior to installation of the line posts and terminal sections. Provide no less than the minimum dimensions for cable terminal concrete foundations and line post socket footings as specified in the contract and no less than that recommended by the manufacturer. The minimum depth for cable terminal foundations is 5 feet. The minimum depth for line post socket foundations is 36 inches. Do not use a tubular concrete form for casting any concrete footings or anchors.

Cast concrete cable terminal foundations and line post socket footings in place, against well compacted, undisturbed soil. If the surrounding soil is disturbed or otherwise unsuitable, remove and compact in lifts meeting the requirements of Section 203 and the manufacturer's recommendations. If excavation for the holes results in mounding around the holes, remove the mounded material in a manner that results in the area around the holes being flush with the

surrounding grade. Fill excess excavation volumes with additional concrete at no cost to the Department. Provide a positive method of setting post sleeves in concrete ensuring that the inserted posts will be plumb and maintain correct line and grade. Place reinforcing bars in accordance with the manufacturer's approved shop drawings.

Set line posts and concrete sockets to achieve the proper cable height and vertical and horizontal tolerances set by the manufacturer. At a minimum, install concrete sockets so that the sleeves are within 1/2 inch of horizontal alignment. Replace posts, terminals, and concrete sockets and foundations not set at the proper line and grade prior to installation of the cables.

Allow all concrete foundations and footings to cure to design strength prior to stringing cable. The Contractor is responsible for determining when adequate strength is achieved. Any failures due to inadequate strength are the Contractor's responsibility. Replace cable anchorage concrete foundations with larger size foundations if the foundations display movement of 1 inch or greater, at any time up to final project acceptance. If lateral movement of the line posts occurs after tensioning the cable, add additional posts in accordance with the manufacturer's recommendations at no cost to the Department.

4) Cables and Fittings.

Install the cables at the correct elevation and proper heights as shown in the manufacturer's design and approved shop drawings.

To the greatest extent feasible, splice segments of cable with factory installed fittings on the end of the cables. Where field installation of mechanical fittings (such as swages or closed body wedge type devices) on the ends of the cable are necessary, the Inspector will witness the field splice. Non-witnessed field splices will not be accepted and must be removed and replaced at no cost to the Department. Complete field splice installations in accordance with the manufacturer's recommendations and to ensure the tension can be adequately transferred through the connections.

Stagger splices in accordance with the manufacturer's recommendations. The number and location of splices is subject to the approval of the Project Manager.

5) Digital Tension Meters. Furnish digital tension meters (specifically designed for tensioning high tension cable guardrail). Submit certificate of calibration showing a guaranteed accuracy of 3.00% (+/-).

Place turnbuckles for tensioning at intervals not to exceed the manufacturer's recommendations. Once a cable run is strung on the posts and anchored, apply tensioning procedures in accordance with the manufacturer's recommendations prior to exposing installations to adjacent traffic. Use the specified tension meter and adjust as required for the cable temperature per manufacturer recommendations. Ensure cable ends on each side of the turnbuckle are fully constrained to prevent rotation and subsequent twisting or untwisting of the cables while tightening or loosening the turnbuckle. Perform additional tensioning in accordance with the manufacturer's recommendations. Prior to final inspection, re-verify and if necessary, re-tension each cable run.

Maintain a tension log showing date, time, location, cable temperature, ambient air temperature and final tension reading, signed by the person performing the tension testing. Submit the tensioning information and the written log to the Project Manager no later than 2 calendar days after the final tensioning of each cable is completed.

6) Maintenance During Construction. The Contractor is responsible for maintaining and repairing the cable barrier system until the contract is accepted in accordance with Subsection 105.17. Repair the damaged barrier system within 24 hours. The repaired section needs to be re-inspected and certified by the manufacturer.

Repairs made to the cable system and terminals due to damage not caused by the Contractor will be paid in accordance with Subsection 109.04. No additional payments will be made for repairs resulting from faulty materials or Contractor negligence.

7) Cable System Installation Training and Certification.

Submit the manufacturer's recommendations, details, installation procedures, and other pertinent information along with electronic PDF access to these items. Discuss all aspects of the installation, tensioning, testing, and other procedures. Direct special attention to the method of constructing field installed mechanical fittings, such as swages and closed body wedge type connections, on the ends of the cable.

Have a manufacturer's representative present during the installation of the first section of the cable barrier system to supervise installation of all components through the cable tensioning. Upon completion of the entire project cable barrier system, have the manufacturer's representative inspect and certify in writing that the cable barrier system was installed in accordance with the manufacturer's design and the requirements of this contract.

Following completion of all cable guardrail installations, and prior to project acceptance, conduct a maintenance conference with the manufacturer's representative and specified Department maintenance and construction personnel, as well as area emergency services personnel, covering all aspects of maintaining and repairing High-Tension Cable Rail. Submit installation and maintenance manuals along with electronic PDF access to the manuals.

8) High-Tension Cable Rail Replacement Parts Package. Furnish the following replacement parts package:

9) Two Tension Meters and associated hardware.

10) Cable Sheaves for the Steel Cable.

11) Carry Cases.

12) One dozen sets of cable field splicing hardware (for closed body wedge type connections) and two sets of any specialized hand tools.

13) One dozen sets of turnbuckle splicing hardware and two sets of any specialized hand tools.

14) 1000 feet of additional galvanized, pre-stretched cable.

15) Two sets of terminal end posts (first 50 feet) with all specific hardware, including the steel post sleeves for installation in concrete.

16) 500 line posts with all attached hardware and accessories including spacers, reflectors, hooks, straps, bolts, caps, concrete socket covers, etc.

17) 50 line post sleeves for installation in concrete.

Deliver the replacement parts package to the Great Falls Division Maintenance Office (200 Smelter Ave. NE Great Falls 59403) prior to acceptance of the project. Coordinate delivery with the Project Manager.

D. Method of Measurement

1) High-Tension Cable Rail. High-Tension Cable Rail is measured by the linear foot. The length is determined by measuring from end to end and then reducing the length for each terminal section. All cable rail delineation is considered incidental to this item and will not be measured separately.

2) Replacement Parts. The High-Tension Cable Rail Replacement Parts Package is measured per lump sum and paid under item Miscellaneous Items- Repair. The High-Tension Cable Rail Replacement Parts Package includes all parts and delivery as specified.

3) High-Tension Cable Rail – Training. Includes both pre-installation training and post- installation training, is measured as lump sum and paid under item Miscellaneous Items-Repair.

E. Basis of Payment.

Payment for the completed and accepted quantities is made under the following:

Pay Item	Pay Unit
High-Tension Cable Rail	LNFT
Miscellaneous Items- Repair	Lump sum

Payment at the contract unit prices is full compensation for all resources necessary to complete these items of work under the contract.

24. REINFORCED CONCRETE PIPES, BOXES, INLETS AND MANHOLES [603] (ADDED 12-13-18)

Furnish RCB, RCP, inlets, and manholes from a plant listed on the Department's QPL.

25. TRAFFIC CONTROL – USAF CONVOYS [618] (REVISED 3-25-21)

A. General. In addition to the MDT Standard and Supplemental Specifications, the MDT Detailed Drawings, and the Manual on Uniform Traffic Control Devices (MUTCD), provide traffic control in the following manner:

1) Expect United States Air Force convoys to travel through the construction zone(s) frequently (up to 3 times per week). Furnish a Traffic Control Plan and sequence of operations that gives priority movement to these convoys, without stopping them at any time. Adjust flagging and construction operations to allow the convoys to move uninhibited through the work zone. Frontline vehicles for the convoy will contact the flagger a minimum of 30 minutes in advance of the convoy approaching the work zone.

2) Upon receipt of the Contractor's submitted Traffic Control Plan in accordance with subsection 618.03.2, the Project Manager must contact Malmstrom Air Force Base to coordinate convoys through the project. Also contact Malmstrom AFB 48 hours prior to the start of any work activity that stops traffic. Use the following contact information for Malmstrom AFB:

Convoy Ops Branch AFOSI Det 806
Malmstrom AFB, Montana
Tel: (406) 731-2750; (406) 731-2746

3) Individual military vehicles not part of a United States Air Force convoy are exempt from this requirement and can be stopped in traffic queues with the travelling public.

B. Measurement and Payment. Traffic control measurement and payment is made in accordance with Section 618.

26. TRAFFIC CONTROL DEVICES – PLASTIC DRUMS [618] (REVISED 1-23-20)

Beginning on April 1, 2021, all plastic drums furnished and installed on Interstate projects must include 6-inch retro-reflective white and retro-reflective fluorescent orange sheeting.

Beginning on April 1, 2022, all plastic drums furnished and installed on all projects must include 6-inch retro-reflective white and retro-reflective fluorescent orange sheeting. All other requirements of Detailed Drawing 618-00 still apply.

END OF SECTION I

MDT NONDISCRIMINATION AND
DISABILITY ACCOMMODATION NOTICE

Montana Department of Transportation ("MDT") is committed to conducting all of its business in an environment free from discrimination, harassment, and retaliation. In accordance with State and Federal law MDT prohibits any and all discrimination and protections are all inclusive (hereafter "protected classes") by its employees or anyone with whom MDT does business:

Federal protected classes	State protected classes
Race, color, national origin, sex, sexual orientation, gender identity, age, disability, income-level & Limited English Proficiency	Race, color, national origin, parental/marital status, pregnancy, childbirth, or medical conditions related to pregnancy or childbirth, religion/creed, social origin or condition, genetic information, sex, sexual orientation, gender identification or expression, ancestry, age, disability mental or physical, political or religious affiliations or ideas, military service or veteran status, vaccination status or possession of immunity passport

For the duration of this contract/agreement, the PARTY agrees as follows:

(1) Compliance with Regulations: The PARTY (hereinafter includes consultant) will comply with all Acts and Regulations of the United States and the State of Montana relative to Non-Discrimination in Federally and State-assisted programs of the U.S. Department of Transportation and the State of Montana, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

(2) Non-discrimination:

a. The PARTY, with regard to the work performed by it during the contract, will not discriminate, directly or indirectly, on the grounds of any of the protected classes in the selection and retention of subcontractors, including procurements of materials and leases of equipment, employment, and all other activities being performed under this contract/agreement.
b. The PARTY will provide notice to its employees and the members of the public that it serves that will include the following:
    i. A statement that the PARTY does not discriminate on the grounds of any protected classes.
    ii. A statement that the PARTY will provide employees and members of the public that it serves with reasonable accommodations for any known disability, upon request, pursuant to the Americans with Disabilities Act as Amended (ADA).
    iii. Contact information for the PARTY's representative tasked with handling non-discrimination complaints and providing reasonable accommodations under the ADA.
    iv. Information on how to request information in alternative accessible formats.

c. In accordance with Mont. Code Ann. § 49-3-207, the PARTY will include a provision, in all of its hiring/subcontracting notices, that all hiring/subcontracting will be on the basis of merit and qualifications and that the PARTY does not discriminate on the grounds of any protected class.

(3) Participation by Disadvantaged Business Enterprises (DBEs):

a. If the PARTY receives federal financial assistance as part of this contract/agreement, the PARTY will make all reasonable efforts to utilize DBE firms certified by MDT for its subcontracting services. The list of all currently certified DBE firms is located on the MDT website at mdt.mt.gov/business/contracting/civil/dbe.shtml

b. By signing this agreement, the PARTY assures MDT that:

The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate.

c. The PARTY must include the above assurance in each contract/agreement the PARTY enters.

(4) Solicitation for Subcontracts, Including Procurement of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation, made by the PARTY for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the PARTY of the PARTY's obligation under this contract/agreement and all Acts and Regulations of the United States and the State of Montana related to Non-Discrimination.

(5) Information and Reports: The PARTY will provide all information and reports required by the Acts, Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information and its facilities as may be determined by MDT or relevant US DOT Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the PARTY will so certify to MDT or relevant US DOT Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

(6) Sanctions for Noncompliance: In the event of a PARTY's noncompliance with the Non- discrimination provisions of this contract/agreement, MDT will impose such sanctions as it or the relevant US DOT Administration may determine to be appropriate, including, but not limited to:

a. Withholding payments to the PARTY under the contract/agreement until the PARTY complies; and/or

b. Cancelling, terminating, or suspending the contract/agreement, in whole or in part.

(7) Pertinent Non-Discrimination Authorities: During the performance of this contract/agreement, the PARTY, for itself, its assignees, and successor in interest, agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Federal

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21;
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airways Improvement Act of 1982, (49 U.S.C. § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (broadened the scope, coverage, and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975, and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients, and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibits discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 CFR parts 37 and 38;
- The Federal Aviation Administration's Non-Discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which prevents discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English Proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);

- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. § 1681 *et seq.*).

- Executive Order 13672 prohibits discrimination in the civilian federal workforce on the basis of gender identity and in hiring by federal contractors on the basis of both sexual orientation and gender identity.

State

- Mont. Code Ann. § 49-3-205 Governmental services;

- Mont. Code Ann. § 49-3-206 Distribution of governmental funds;

- Mont. Code Ann. § 49-3-207 Nondiscrimination provision in all public contracts.

(8) Incorporation of Provisions: The PARTY will include the provisions of paragraph one through seven in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and/or directives issued pursuant thereto. The PARTY will take action with respect to any subcontract or procurement as MDT or the relevant US DOT Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the PARTY becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the PARTY may request MDT to enter into any litigation to protect the interests of MDT. In addition, the PARTY may request the United States to enter into the litigation to protect the interests of the United States.

SEEDING SPECIAL PROVISIONS

Project No: HSIP 15-5(143)280 Project Name: SF 169 I-15 HT Cable Rail
Project length: 10.9 miles CN: 9376000

Area Descriptions	
Area 1	N/A
Area 2	Areas with slopes steeper than 3:1 or inaccessible to drill seed equipment
Area 3	A 15-foot wide strip adjacent and parallel to the finished pavement, on both sides.

1) Topsoil. Salvage topsoil as available to place an average 4 inch loose depth over all disturbed areas. Place the topsoil in accordance with Subsection 203.03.6 of the Standard Specifications immediately following grading.

2) Seedbed preparation and application. Condition all drill seeded areas within 24 hours prior to seeding. Seeding outside the designated seeding period is allowed only with prior approval from MDT's Reclamation Specialist. Rake, harrow or otherwise scarify broadcast seeded areas to incorporate the seed 0.25 to 0.5 inches into the topsoil.

	Method	Seeding Depth	Season of Seeding
Area 2	Dry Broadcast Seed		10/1—5/15
Area 3	Drill Seed	0.25—0.5in	10/1—5/15

3) Provide the following reclamation seed mixture. Use substitute species only if the recommended species is not available and substitution is approved by MDT's Reclamation Specialist.

Area 3			Drill Seeding Rate		
Scientific Name	Common Name	Variety	PLS / sq. ft.	% of Mix	Pounds PLS/ acre
Elymus trachycaulus	Slender wheatgrass	Pryor, First strike or Revenue	6	7	2.0
Elymus lanceolatus spp. riparium	Streambank wheatgrass	Sodar	14	15	4.0
Poa secunda (P. canbyi)	Canby bluegrass	Canbar	42	46	2.0
Sporobolus cryptandrus	Sand dropseed	VNS	13	14	0.1
Achnatherum hymenoides	Indian ricegrass	Rimrock	16	18	3.0
		GRAND TOTAL	91	100	11.1

Area 2 = Area 3	Broadcast seeding rate is 2X drill seeding rate of Area 1.


SF 169 I-15 HT CABLE RAIL
HSIP 15-5(143)280
ROADWAY & ROADSIDE SAFETY IMPROVEMENT
CONTROL NUMBER 9376000
PROJECT LOCATION STATE MAP- MONTANA

MONTANA MDT DEPARTMENT OF TRANSPORTATION

N

0 15 30 60
Miles


SECTION II

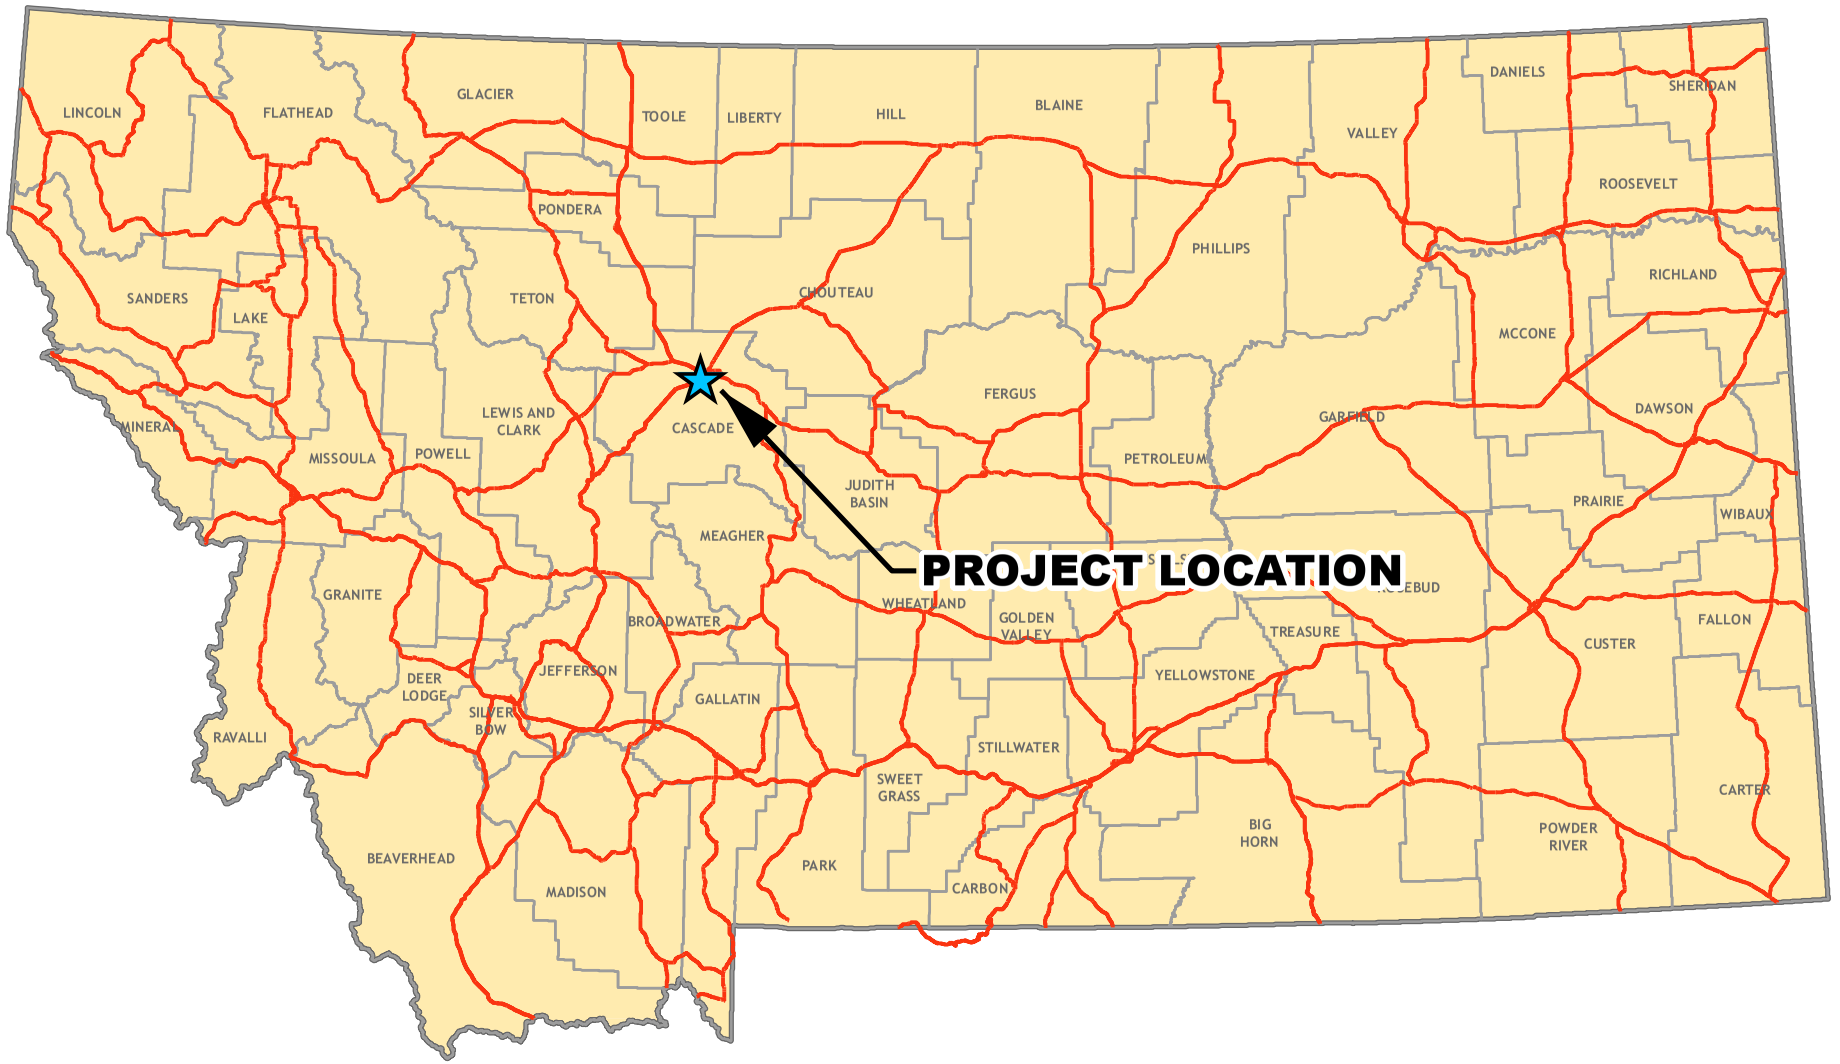


Page 6 of 10

AWARD COPY

SF 169 I-15 HT CABLE RAIL
HSIP 15-5(143)280
ROADWAY & ROADSIDE SAFETY IMPROVEMENT
CONTROL NUMBER 9376000
PROJECT LOCATION QUAD MAP- CASCADE COUNTY 1 OF 4

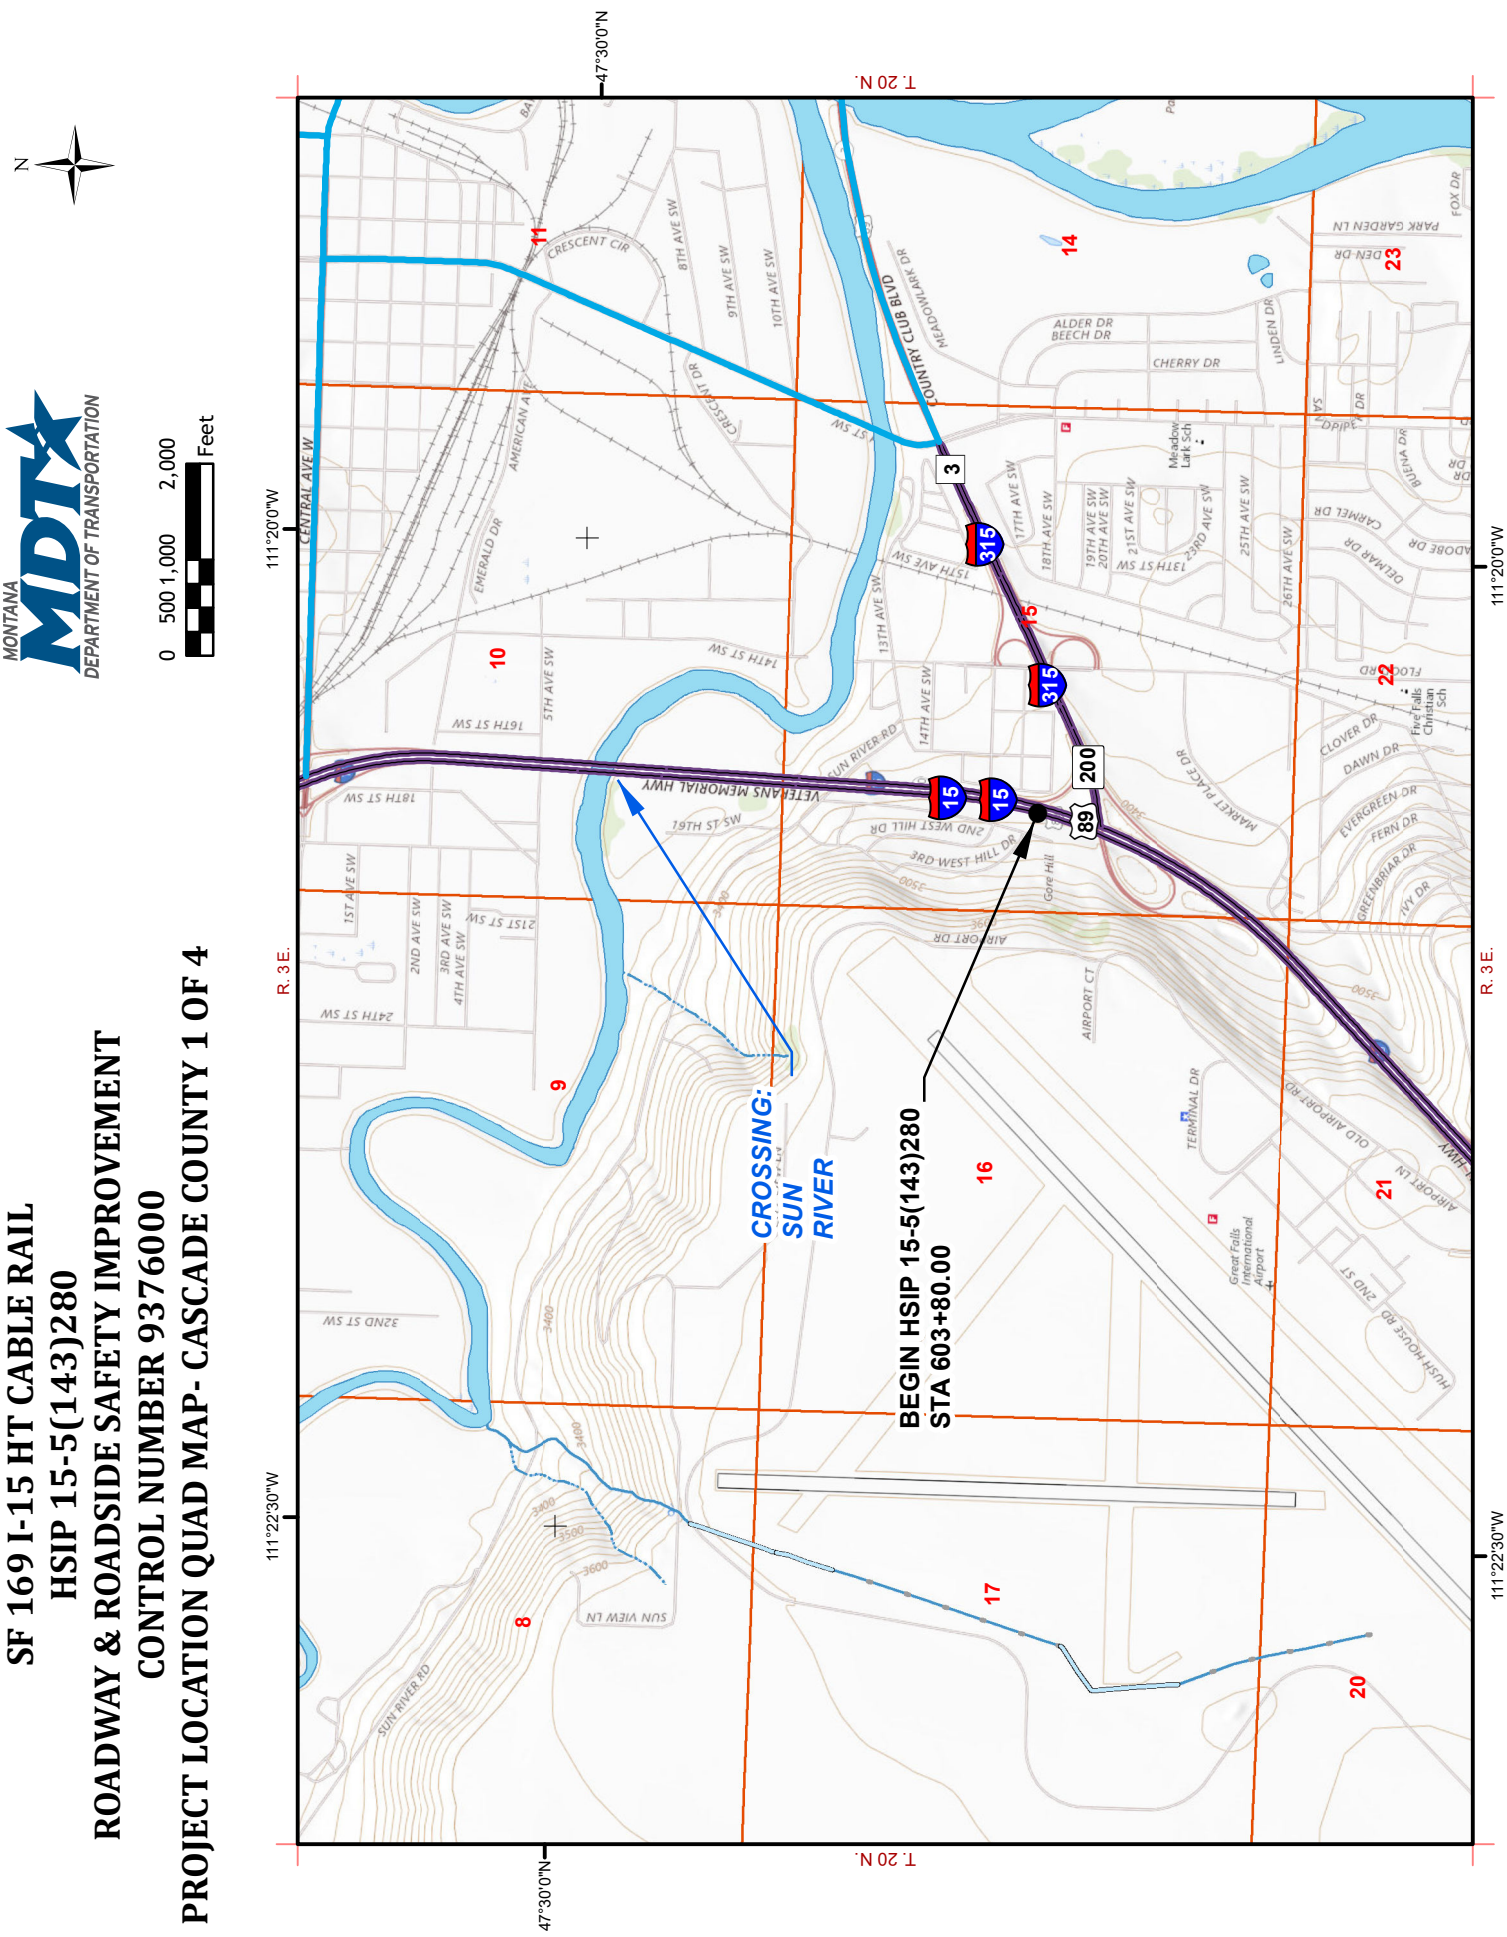

SF 169 I-15 HT CABLE RAIL
HSIP 15-5(143)280
ROADWAY & ROADSIDE SAFETY IMPROVEMENT
CONTROL NUMBER 9376000
PROJECT LOCATION QUAD MAP- CASCADE COUNTY 2 OF 4

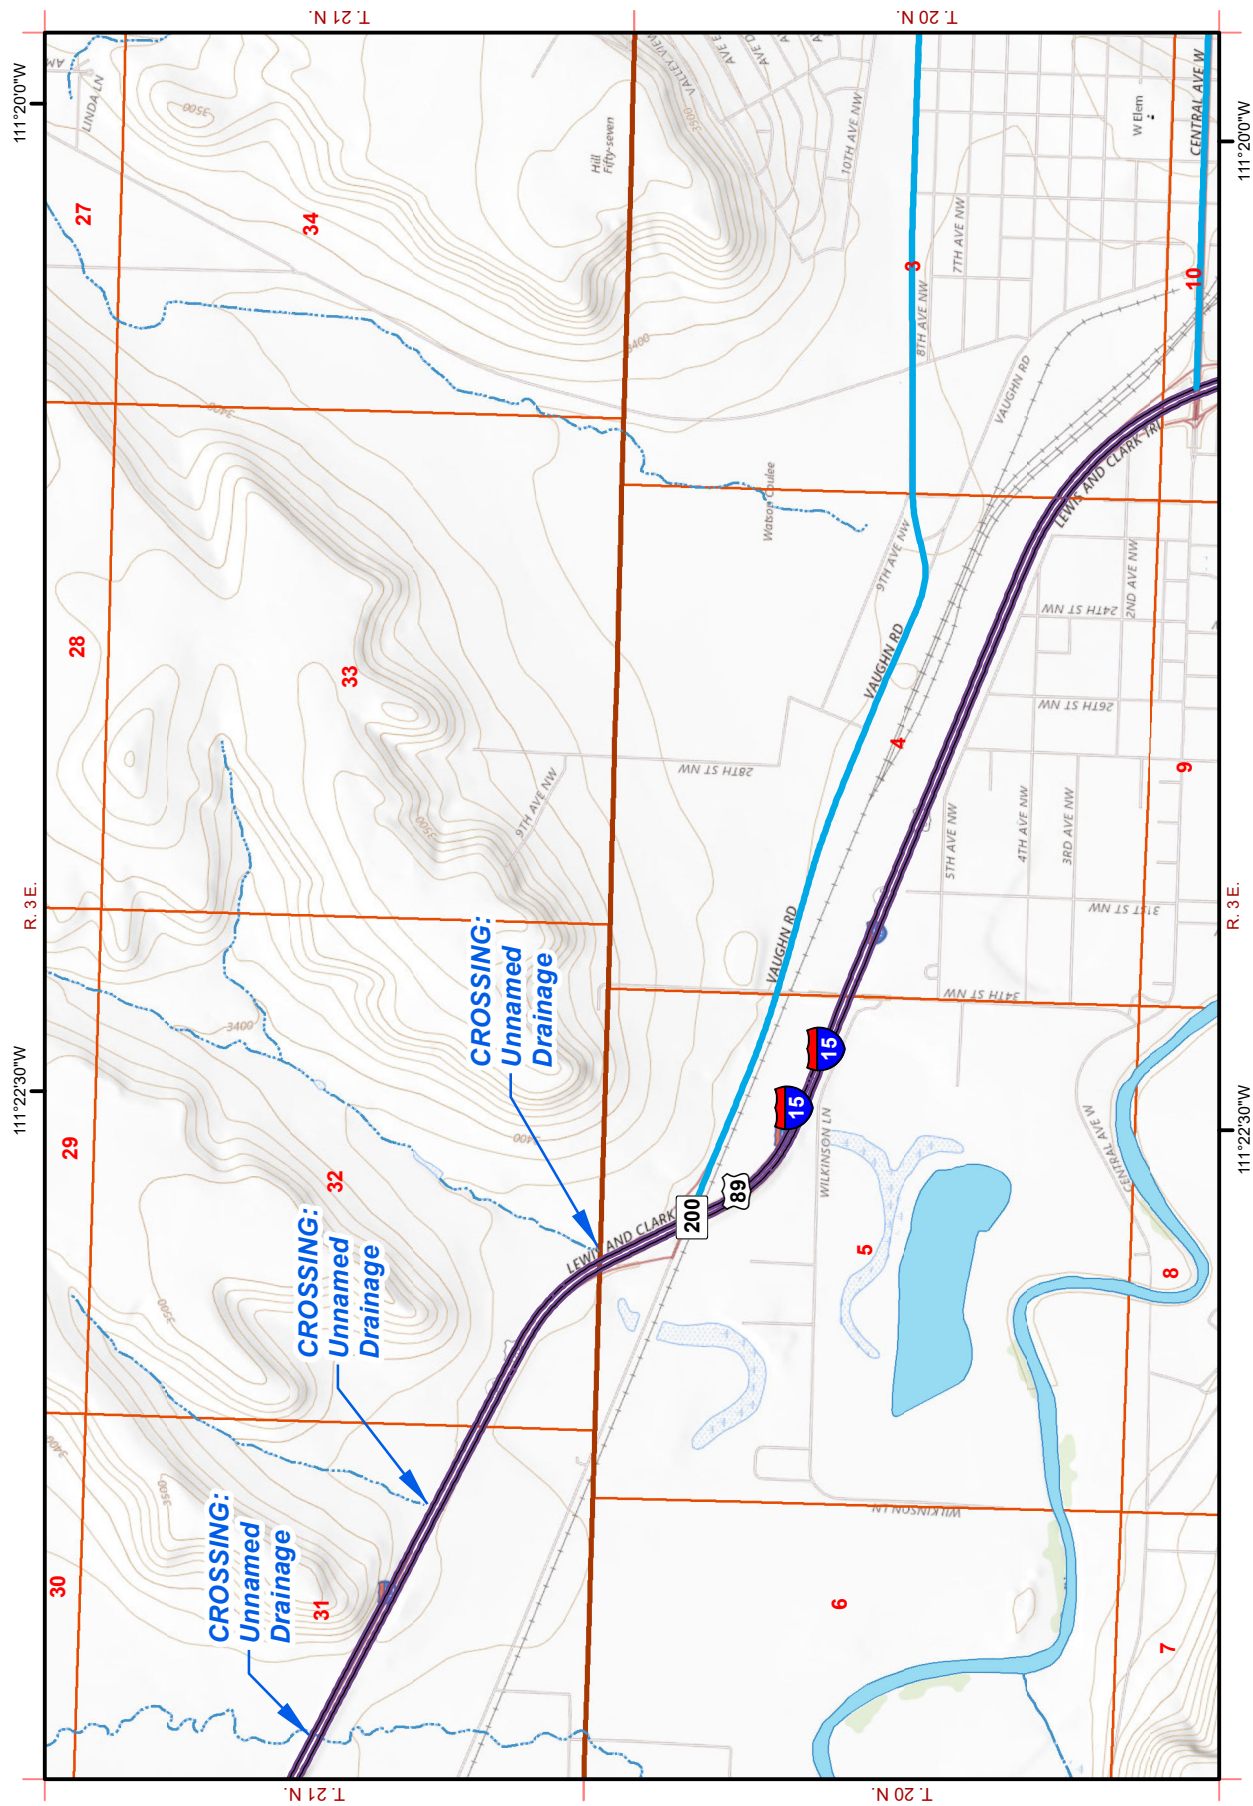


SF 169 I-15 HT CABLE RAIL
HSIP 15-5(143)280
ROADWAY & ROADSIDE SAFETY IMPROVEMENT
CONTROL NUMBER 9376000
PROJECT LOCATION QUAD MAP- CASCADE COUNTY 3 OF 4

MONTANA MDT DEPARTMENT OF TRANSPORTATION


N

0 500 1,000 2,000 Feet

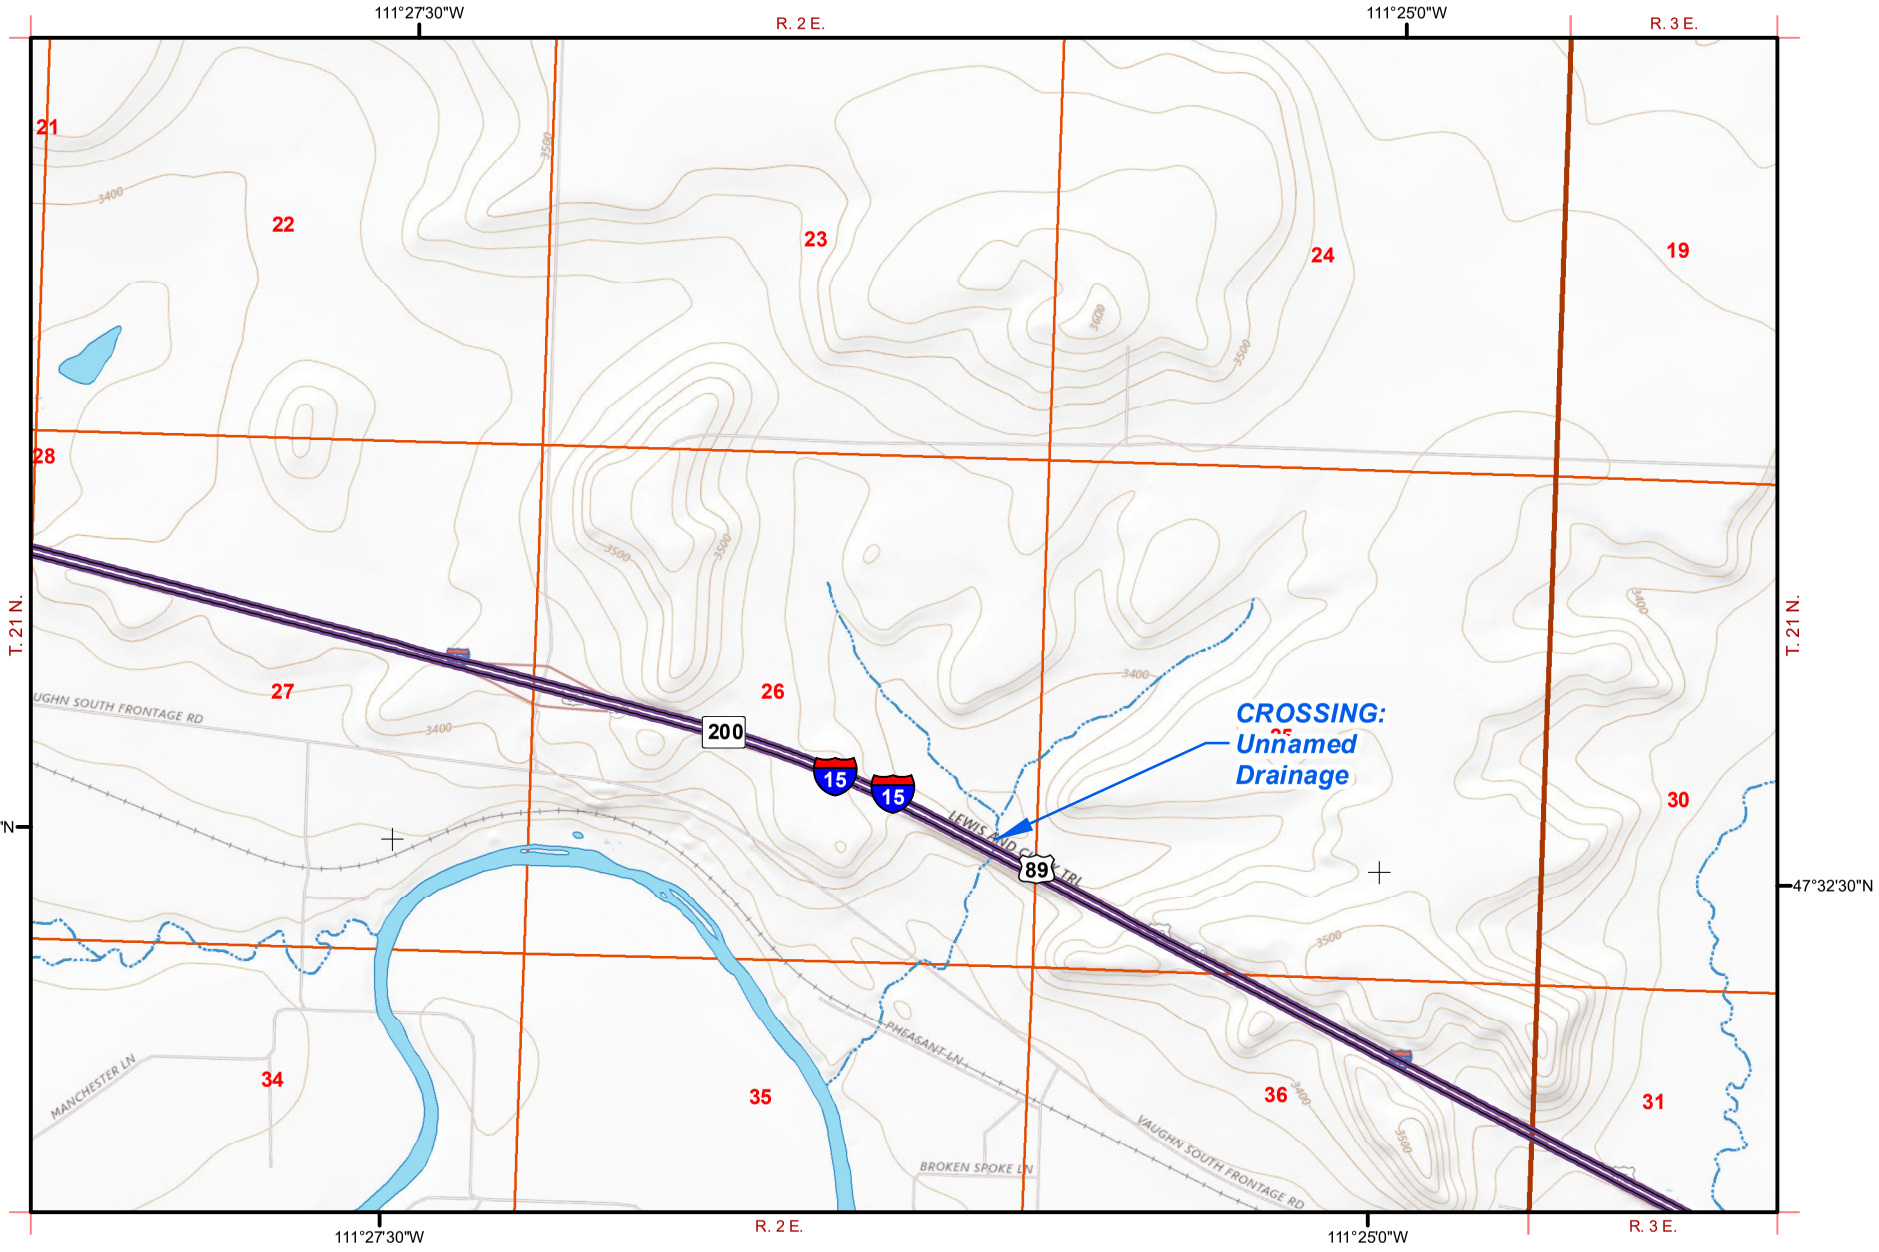

AWARD COPY

SF 169 I-15 HT CABLE RAIL
HSIP 15-5(143)280
ROADWAY & ROADSIDE SAFETY IMPROVEMENT
CONTROL NUMBER 9376000
PROJECT LOCATION QUAD MAP- CASCADE COUNTY 4 OF 4

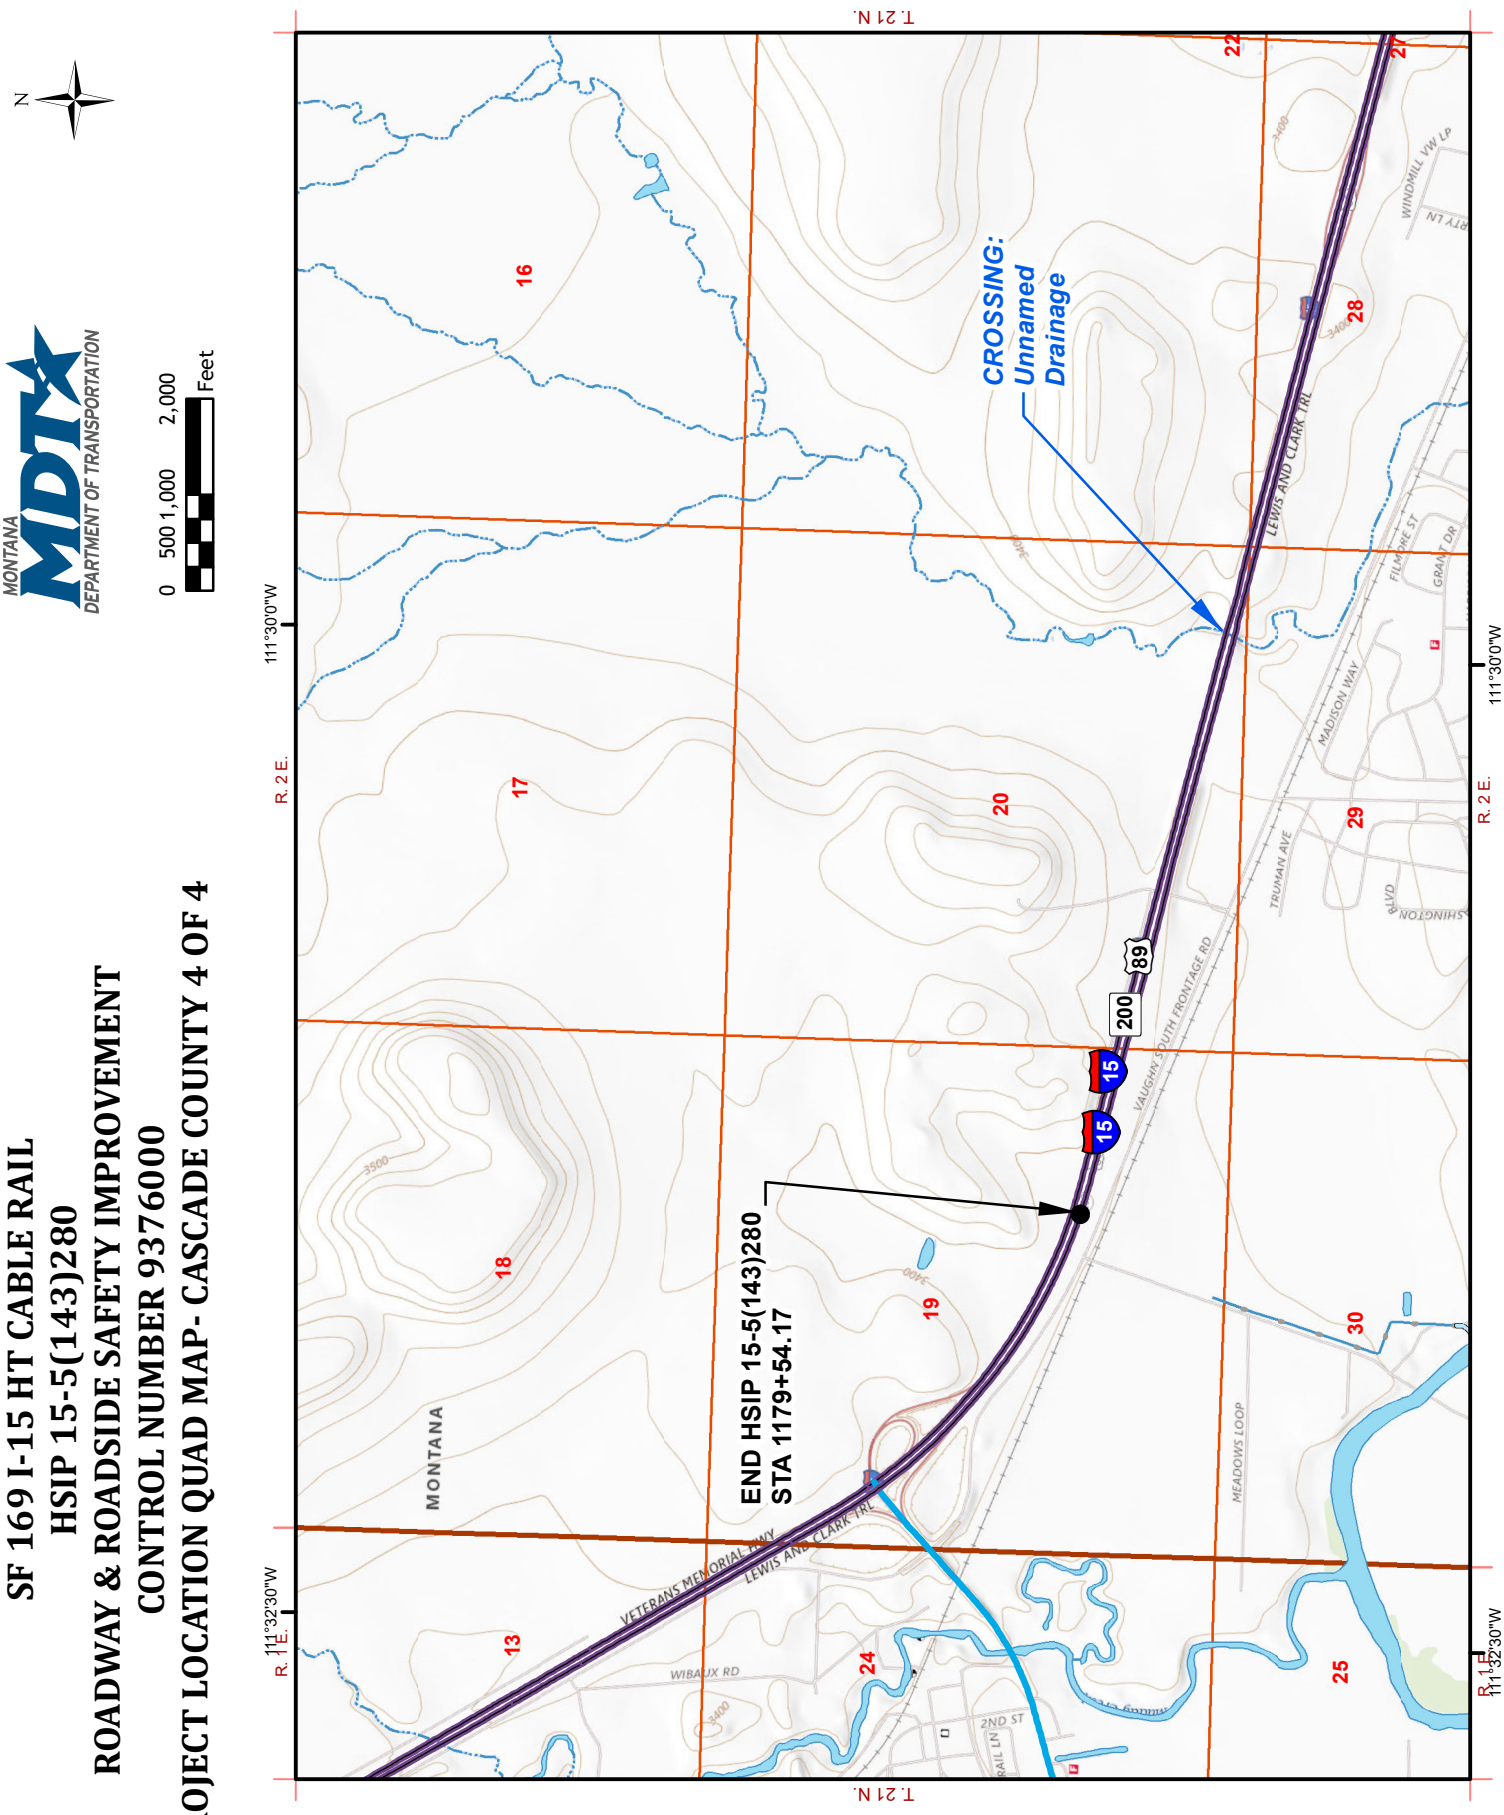

STANDARD PROVISIONS INDEX

FEDERAL AID PROJECTS CONTAINS

Federal Wage Rates (Rev. 1-7-2022)..... 9 Pages

Requirements & Acknowledgement for Working on Railroad R/W ..... 1 Page

Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Rev.5-1-2012]..... 12 Pages

Supplemental Revisions for Required Contract Provisions Federal-Aid Const. Contracts (FORM FHWA-1273) [Added 2-4-2016] ..... 1 Page

EEO Affirmative Action Req. on Federal-Aid Construction ..... 1 Page

General Decision Number: MT20220079 01/07/2022

Superseded General Decision Number: MT20210079

State: Montana

Construction Type: Highway

Counties: Montana Statewide.

HIGHWAY CONSTRUCTION PROJECTS

Note: Contracts subject to the Davis-Bacon Act are generally required to pay at least the applicable minimum wage rate required under Executive Order 14026 or Executive Order 13658. Please note that these Executive Orders apply to covered contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but do not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60).

If the contract is entered into on or after January 30, 2022, or the contract is renewed or extended (e.g., an option is exercised) on or after January 30, 2022, Executive Order 14026 generally applies to the contract. The contractor must pay all covered workers at least $15.00 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on that contract in 2022.

If the contract was awarded on or between January 1, 2015, and January 29, 2022, and the contract is not renewed or extended on or after January 30, 2022, Executive Order 13658 generally applies to the contract. The contractor must pay all covered workers at least $11.25 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on that contract in 2022.

The applicable Executive Order minimum wage rate will be adjusted annually. If this contract is covered by one of the Executive Orders and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must still submit a conformance request.

Additional information on contractor requirements and worker protections under the Executive Orders is available at www.dol.gov/whd/govcontracts.Modification Number

Publication Date

0 01/07/2022

* SUMT2014-001 02/19/2014

	Rates	Fringes
CARPENTER		
Carpenter/Piledriverman	$ 29.00	11.82
Millwright	$ 32.00	11.82

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Carpenter zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

CEMENT MASON/CONCRETE FINISHER...$ 24.87 10.80

Zone 1: 0 to 25 miles – Free
Zone 2: 25 to 50 miles - Base Pay +$2.50
Zone 3: Over 50 miles - Base Pay +$3.00

The Cement Mason/Concrete Finisher zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Missoula, Kalispell.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

DIVER

Diver Tender.....$ 37.16 14.52
Diving.....$ 76.32 14.52
Stand-By.....$ 38.16 14.52
The tender shall receive 2 hours at the straight time pay rate per shift for dressing and/or undressing a Diver when work is done under hyperbaric conditions.

Depth Pay (Surface Diving):

0-20 ft.: Free zone
>20-100 ft.: $2.00 per ft.
>100-150 ft.: $3.00 per ft.
>150-220 ft.: $4 00 per ft.
>220 ft.: $5.00 per ft.
Diving in Enclosures (Diver Only):

0-25 ft.: Free zone
>25-300 ft.: $1.00 per ft.

DIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN (LINE CONSTRUCTION)

Equipment Operator.....$ 33.27 14.16
Groundman.....$ 25.98 13.25
Lineman.....$ 43.43 15.38

TRAVEL PAY:

$50.00 per day - 0-25 Miles from the County Courthouse of the following cities: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, and Missoula.

$60.00 per day - Over 25 Miles

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract

ELECTRICIAN

All Areas.....$ 32.74 13.42

TRAVEL PAY:

Zone 1: 0 to 10 miles - Free
Zone 2: 10 to 60 miles - Federal mileage both ways/day
Zone 3: Over 60 miles - $75.00 per day

The Electrician zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

IRONWORKER.....$ 27.25 20.98

TRAVEL PAY:

0 to 45 miles - Free
45-85 miles - $55.00 per day

Over 85 miles - $85.00 per day

The Ironworker zone hourly rate applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Courthouse of the following cities to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

Zone 1: 0 to 25 miles - Free
Zone 2: 25 to 50 miles - Base + $2.50
Zone 3: Over 50 miles - Base + $3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

LABORER

Group 1.....	$ 20.90	9.60
Group 2.....	$ 23.97	9.60
Group 3.....	$ 24.19	9.60
Group 4.....	$ 25.18	9.60

GROUP 1: Flag Person

GROUP 2: All General Labor work; Burning Bar; Bucket Man; Carpenter Tender; Caisson Worker; Cement Mason Tender; Cement Handler (dry); Chuck Tender; Choker Setter; Concrete Worker; Curb Machine-Lay Down; Crusher and Batch Plant Worker; Fence Erector; Form Setter; Form Stripper; Heater Tender; Landscaper; Pipe Wrapper; Pot Tender; Powderman Tender; Rail and Truck Loaders and Unloaders; Riprapper; Sealants for Concrete and other materials; Sign Erection, Guard Rail and Jersey Rail; Stake Jumper; Spike Driver; Signalman; Tail Hose man; Tool Checker and Houseman; Traffic Control Worker.

GROUP 3: Concrete Vibrator; Dump man (Grade man); Equipment Handler; Geotextile and Liners; High-Pressure Nozzleman; Jackhammer (Pavement Breaker); Laser Equipment; Non-riding Rollers; Pipelayer; Posthole Digger (power); Power Driven Wheelbarrow; Rigger; Sandblaster; Sod-Cutter-power; Tampers

GROUP 4: Asphalt Raker; Cutting Torch; Grade Setter; High-Scaler; Power Saws (Faller & Concrete); Powderman ($1.00 per hour above Group 4 rate); Rock & Core Drill; Track or Truck Mounted Wagon Drill; Welder including Air Arc

LABORERS ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

PAINTER (Pavement Marking/Milling and related work. Includes operating marking and all other equipment and all work involved in application of pavement markings including epoxies, paints, tape, buttons, thermo-plastics, and any other products applied for traffic marking purposes and for directing and regulating traffic and cutting rumble strips) .....$ 28.00 10.30

PAINTER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

POWER EQUIPMENT OPERATOR:

Group 1.....$ 26.52 10.40
Group 2.....$ 28.55 10.40
Group 3.....$ 29.41 10.40
Group 4.....$ 30.10 10.40
Group 5.....$ 31.44 10.40
Group 6.....$ 32.13 10.40
Group 7.....$ 34.23 10.40

GROUP 1: Air Compressor; Auto Fine Graders; Belt Finishing Machine; Boring Machine (small); Cement Silo; Crane, A-Frame Truck Crane; Crusher Conveyor; DW-10, 15, and 20 Tractor Roller; Farm Tractor; Forklift; Form Grader; Front End Loader Under 1 CU Yard; Heavy Duty Drills; Herman Nelson Heater; Mulching Machine; Oiler, All Except Cranes & Shovels; Pumpman.

GROUP 2: Air Doctor; Backhoe/Excavator/Shovel to and including 3 CU Yard; Bit Grinder; Bituminous Paving Travel Plant; Boring Machine Large; Broom, Self-Propelled; Concrete Travel Batcher; Concrete Float & Spreader; Concrete Bucket Dispatcher; Concrete Finish Machine; Concrete Conveyor; Distributor; Dozer; Rubber-Tired, Push & Side Boom; Elevating Grader/Gradall; Field Equipment Serviceman; Front End Loader 1 CU Yard to including 5 CU Yard; Grade Setter; Heavy Duty Drills, All Types; Hoist/Tugger, All; Hydralift & Similar; Industrial Locomotive; Motor Patrol, Except Finish; Mountain Skidder; Oiler - Cranes & Shovels; Pavement Breaker, EMSCO; Power Saw, Self-Propelled; Pugmill; Pumpcrete/Grout Machine; Punch Truck; Roller, Other Than Asphalt; Roller, Sheepsfoot, Self-Propelled; Roller, 25 Tons and Over; Ross Carrier; Rotomill Under 6 Ft; Trenching Machine; Washing/Screening Plant.

GROUP 3: Asphalt Paving Machine; Asphalt Screed; Backhoe/Excavator/Shovel Over 3 CU Yard; Cableway Highline; Concrete Batch Plant; Concrete Curing Machine; Concrete Pump; Cranes; Creter; Cranes, Electric Overhead; Cranes 24 Tons and Under; Curb Machine/Slip Form Paver; Finish Dozer; Front End Loader Over 5 CU Yard; Mechanic/Welder; Pioneer Dozer; Roller Asphalt (Breakdown & Finish); Rotomill Over 6 FT; Scraper, Single, Twin or Pulling Belly Dump; Yo-Yo Cat.

GROUP 4: Asphalt/Hot Plant Operator, Cranes, 25 Tons to 44 Tons; Crusher Operator; Finish Motor Patrol; Finish Scraper.

GROUP 5: Cranes, 45 Tons to Including 74 Tons.

GROUP 6: Cranes, 75 Tons to Including 149 Tons; Crane, Whirley (All).

GROUP 7: Cranes, 150 Tons to Including 250 Tons (Add $ 1.00 For Every 100 Tons Over 250 Tons; Crane, Tower (All).

POWER EQUIPMENT OPERATOR ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles - Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50
ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

TRUCK DRIVER

Group 1.....$ 22.39 10.16
Group 2.....$ 28.06 10.16

GROUP 1: Pilot Car

GROUP 2: Combination Truck and Concrete Mixer and Transit Mixer; Dry Batch Trucks; Distributor Driver; Dump man; Dump Trucks and Similar Equipment; Dumpster; Flat Trucks; Lumber Carriers; Lowboys; Pickup; Powder Truck Driver; Power Boom; Serviceman; Service Truck/Fuel Truck/ Tire person; Truck Mechanic; Trucks with Power Equipment; Warehouseman, Parts man, Cardex and Warehouse Expeditor; Water Trucks.

TRUCK DRIVER ZONE PAY:

The hourly wage rates applicable to each project shall be determined by measuring the road miles over the shortest practical maintained route from the County Court House of the following cities only to the center of the job: Billings, Bozeman, Butte, Great Falls, Helena, Kalispell, Missoula.

ZONE 1: 0 to 25 miles – Free
ZONE 2: 25 to 50 miles - Base Pay +$2.50

ZONE 3: Over 50 miles - Base Pay +$3.00

The agency shall calculate the mileage and include it in the special provisions of the bid documents and awarded contract.

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury, or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of ""identifiers"" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers:

A four-letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than ""SU"" or ""UAVG"" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers:

Classifications listed under the ""SU"" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers:

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those

classifications: however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can

be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations.

Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor

200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7).

Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board).

Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

Effective 02-10-22

"CONTRACTOR REQUIREMENTS AND ACKNOWLEDGMENT FOR WORKING ON RAILROAD RIGHT-OF-WAY"

This document must be dated and signed by the Contractor and submitted to the State before occupying or working on Railroad right-of-way.

1) No change, which has a direct effect on the Railroad, will be made to construction plans without submitting revised plans and receiving approval from the Railroad. Work covered by the plans, that requires flagging, will be covered by the Railroad/Highway Agreement. For work that is a result of the contractor's discretion, flagging protection will be required when equipment crosses or is working within 25 feet (7.62 meters) of center of any live track. When deemed necessary by local Railroad officers, a flagman may be required at all times while working on Railroad right-of-way in high density rail traffic area.

2) Crossing of any Railroad tracks must be done at approved locations and must be full depth timber, rubber, etc. Any equipment with steel wheels, lugs or tracks must not cross steel rails without the use of rubber tires or other approved protection. This shall apply specifically to, but not be limited to, access for Contractor furnished gravel, borrow or waste sites. The Contractor will be required to obtain a permit from the Railroad, and comply with any provisions thereof, before using any private Railroad crossings. All track crossing locations must be covered by a Private Roadway and Crossing Agreement. This does not apply to any public crossing.

3) Costs of flagging or planking protection of the tracks, which are a direct result of the planned construction, will be paid for by the State. Costs of flagging, planking for protection of the tracks, installation of new crossings or other work caused by the Contractor's discretion, will be paid by the Contractor.

4) When work to be performed by the Contractor is not covered in the Railroad/Highway agreement, the Contractor must furnish a plan to the Railroad for approval showing details as to how any work that may affect the Railroad will be accomplished.

5) Storing of construction materials or any other material, including dirt, sand, etc., within the Railroad right-of-way, will not be allowed unless covered by an easement, construction permit, or Contractor's permit/lease.

6) Construction within 25 feet (7.62 meters) of the center of any track not covered by the Railroad/Highway agreement will require plan approval and authorization by the Railroad Superintendent Maintenance and Engineering. This includes, but is not limited to, any excavation, slope work and driving of sheet piling.

7) No vehicles, equipment or machines shall be parked or stored unattended within 25 feet (7.62 meters) of any track, on railroad right-of-way, without specific written approval of the Railroad.

8) When any work is to be performed on Railroad property by the Contractor that is not shown in the construction plans, the Contractor must submit a detailed plan of the work to the Railroad for their approval.

CONTRACTOR'S ACKNOWLEDGMENT:

_____
Company

By: _____
Name

_____
Title

_____
Date

WORK SITE LOCATION:

_____
Town

_____
State

_____
Project #

Rev. 01/01/04

FHWA-1273 -- Revised May 1, 2012

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Nonsegregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Compliance with Governmentwide Suspension and Debarment Requirements
XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 “Contract provisions and related matters” with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH–1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b.(1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of $10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
(2) the prime contractor remains responsible for the quality of the work of the leased employees;
(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1**. Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. “First Tier Covered Transactions” refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. “First Tier Covered Transactions” refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

Supplemental Revisions for FHWA Form-1273 (Dated May 1, 2012)
Required Contract Provisions
Federal-Aid Construction Contracts

The following are supplementary or amendatory to the May 1, 2012, FHWA Form-1273 insofar as they apply to this contract:

Add the following provisions in accordance with the FHWA memo dated December 11, 2015:

Utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.

Furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in above paragraph to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

SPECIAL PROVISIONS
Rev. 3-15-02
EEO AFFIRMATIVE ACTION REQUIREMENTS ON
FEDERAL & FEDERAL-AID CONSTRUCTION CONTRACTS

Federal-aid contractors are hereby notified they are subject to the OFCCP goals and timetables for minority and female participation expressed below. Compliance with the goals and OFCCP affirmative action efforts for contracts and subcontracts consisting of $10,000 or more will be determined by OFCCP officials.

APPENDIX A

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246)

1. The Offeror's or Bidder's attention is called to the Equal Opportunity Clause and "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

GOALS FOR FEMALE PARTICIPATION EACH TRADE	6.9%
TIMETABLES	GOALS FOR MINORITY PARTICIPATION IN EACH TRADE
153 Great Falls, MT	
SMSA (Standard Metropolitan Statistical Area) Counties	
3040 Great Falls, MT	3.2%
Cascade County	
Non-SMSA Counties	4.1%
Blaine, Broadwater, Chouteau, Fergus, Glacier, Hill, Jefferson, Judith Basin, Lewis & Clark, Liberty, Meagher, Petroleum, Phillips, Pondera, Teton, Toole, Valley, Wheatland	
154 Missoula, MT	
Non-SMSA Counties	2.7%
Beaverhead, Deer Lodge, Flathead, Granite, Lincoln, Madison, Mineral, Lake Missoula, Powell, Ravalli, Sanders, Silver Bow	
155 Billings, MT	
SMSA Counties	
0880 Billings, MT	3.3%
Yellowstone County	
Non-SMSA Counties	3.3%
Big Horn, Carbon, Carter, Custer, Dawson, Fallon, Gallatin, Garfield, Golden Valley, McCone, Musselshell, Park, Powder River, Prairie, Rosebud, Stillwater, Sweet Grass, Treasure, Wibaux, Yellowstone Nat'l Park	
Non-SMSA Counties	
Daniels, Sheridan, Richland, Roosevelt	4.4%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of $10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.